
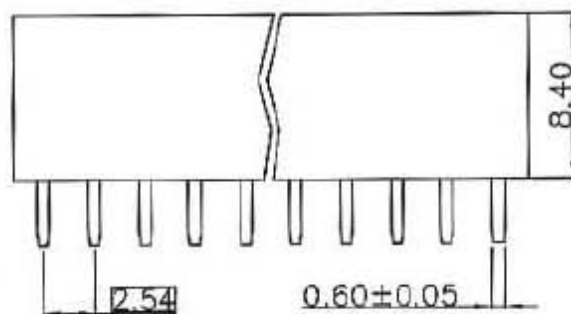
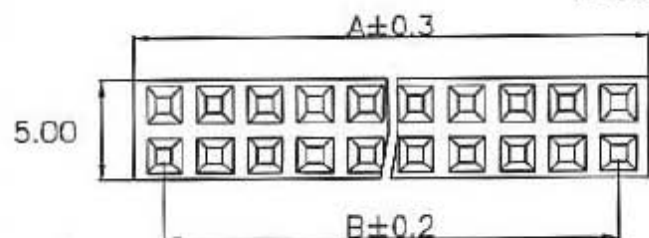


$$A = (\text{NO. OF POSITION PER ROW}) \times 2.54 + 0.50$$

$$B = (\text{NO. OF POSITION PER ROW} - 1) \times 2.54$$


SPECIFICATIONS

Current Rating: 3 Amp. Max.

Withstanding Voltage: 1000V AC R.M.S. /min

Insulation Resistance: 5000M ohms min. At 100V DC

Contact Resistance: 30m ohms Max.

Operating Temperature: -55° C to +105° C


MATERIAL&FINISH

Housing: P.B.T. (UL 94V-0)

Color: Black

Terminal: Copper Alloy

Finish: Gold Plating(t=0.40UM)

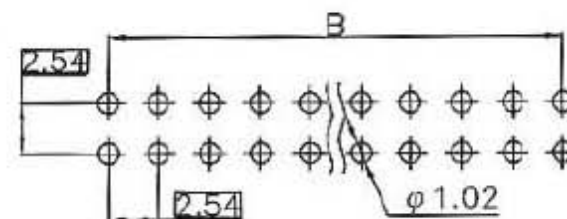

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

T&T

Connection System Co., Ltd.

UNIT

SCALE

PART NAME

MM

3:1

2.54mm FEMALE HEADER
180° DUAL ROW H=8.4mm

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日: 2002/12/04

DRAWING.

APPROVED

JEFFREY

± 0.3

A