

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Brass

Electrical








Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.


Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40℃ to +105℃

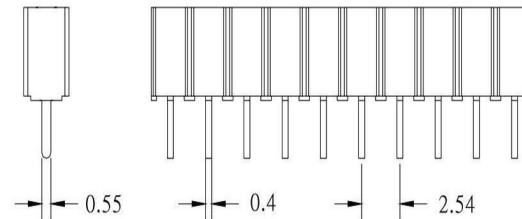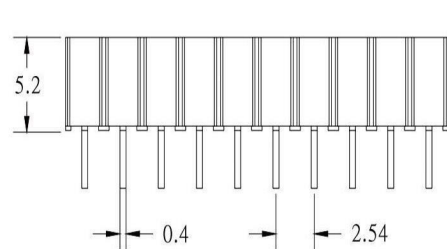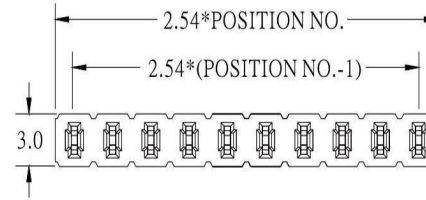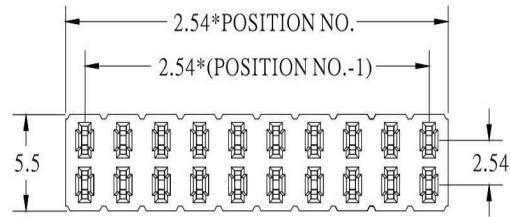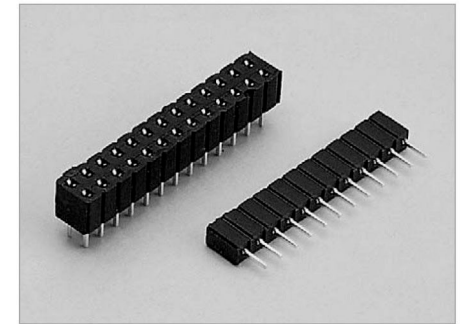

RECOMMENDED P.C.B LAYOUT



RECOMMENDED P.C.B LAYOUT

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准 BETTY

DWG.
製圖 BETTY

DATE 制表日
2011/10/18

SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

GENERAL TOLERANCE
X'± X ±
X''± X ± 0.30
XXX± XXX ±

SIZE.
紙張尺寸 A 4

REV.
版次 B

PART NAME 品名
2.54MM FEMALE HEADER H:5.2MM
STRAIGHT TYPE GOLD FLASH PLATING ROHS

PART NO.
料號 FHxH2.54-xxL