

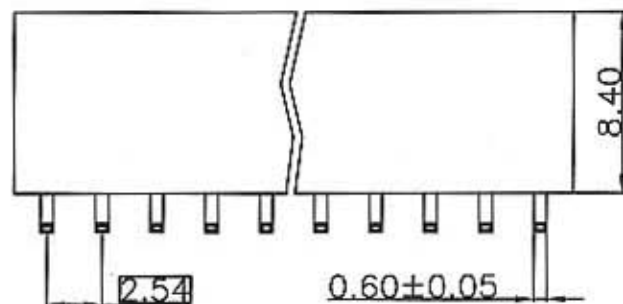


$$A = (\text{NO. OF POSITION PER ROW}) \times 2.54 + 0.50$$

$$B = (\text{NO. OF POSITION PER ROW} - 1) \times 2.54$$

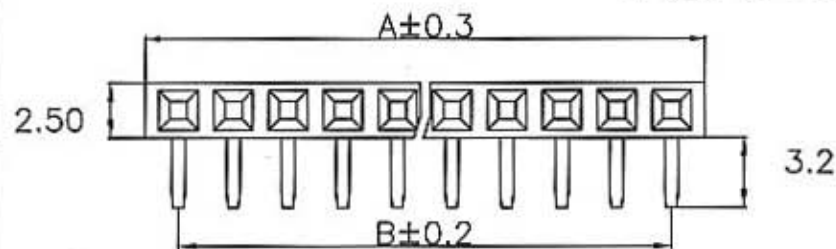


SPECIFICATIONS

Current Rating: 3 Amp. Max.
 Withstanding Voltage: 1000V AC R.M.S. /min
 Insulation Resistance: 5000M ohms min. At 1000V DC
 Contact Resistance: 30m ohms Max.
 Operating Temperature: -55° C to +105° C

MATERIAL&FINISH

Housing: P.B.T. (UL 94V-0)
 Color: Black
 Terminal: Copper Alloy
 Finish: Gold Plating(t=0.40MM)

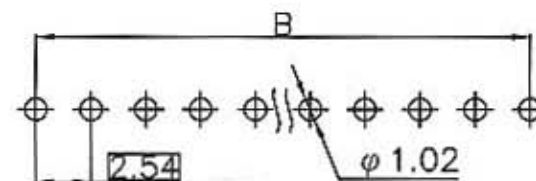

RECOMMEND P.C.B. LAYOUT
 BOTTOM VIEW

T&T Connection System Co., Ltd.

UNIT

SCALE

PART NAME

MM

3:1

2.54mm FEMALE HEADER
 90° SINGLE ROW H=8.4mm

APPD.

CKD.

TOLERANCE

PART NO.

REV.

DATE : 2002/12/04

DRAWING.

APPROVED

± 0.3

FHSHR-2,54-xx

A

Jane