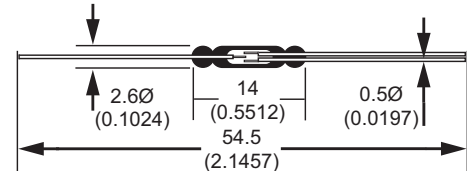


Reed Switch - Compact - Change-Over Contacts
Part Number : GC3525
Product Data Sheet
PICTURE

DIMENSIONS

File Number E103299
RoHS Compliant

Drawings not to scale

All dimensions in mm (inches) nominal.

SPECIFICATION

Contact Form		Change-Over
Contact Material		Rhodium
Switching Capacity	Max.	5 VA
Switching Voltage	Max.	100 VAC/DC
Switching Current	Max.	0.5 A
Carrying Current	Max.	1.0 A
Dielectric Strength	Min.	200 VDC
Contact Resistance	Max.	150 mOhms
Insulation Resistance	Min.	10 ⁹
Pull - In - Sensitivity		15 - 50 AT
Drop - Out - Sensitivity	Min.	8
Bounce Time	Max.	0.6 ms
Release Time	Max.	0.5 ms
Resonant Frequency	Typ.	-
Operating Frequency	Max.	250 Hz
Vibration (10-1000Hz)		35 g
Shock (11 ms)		50
Capacitance	Typ.	1.5 pF
Operating Temperature Range		-40°C + 125°C
Test Coil	Type	1035

NOTE

- When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm (.118in.) to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.
- We offer a crop and form service for Reed Switches to be customized to your specification.

Ordering Information
PART NUMBER 3525 15 50

- Type _____
- Minimum (AT) Sensitivity _____
- Maximum (AT) Sensitivity _____

Did you know we also sell?

Example:

 Type 3525 Standard Sensitivity. Pull-in sensitivity between 15-50 AT is PART NO: 3525 15 50
 Available in ranges of 5 AT e.g: 15-20, 20-25 etc.

Rev. No.

2

Revision Note

Datasheet Redesign

Date

05-06-06

Signature

NG



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : (1) 973 777 6900
www.comus-intl.com
Fax: (1) 973 777 8405

©2006 Copyright Comus International Ltd, 454 Allwood Road, Clifton, New Jersey, 07012, USA.