

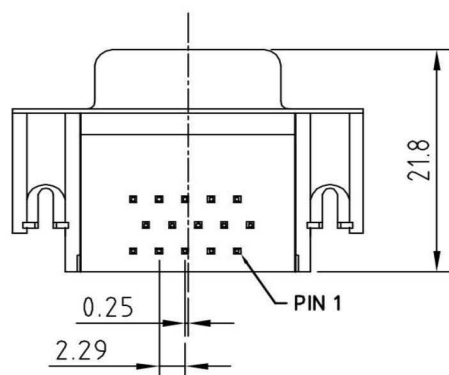
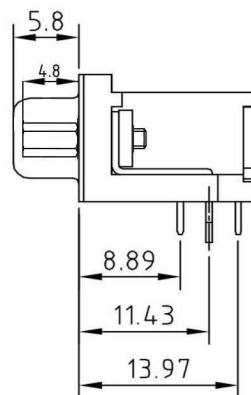


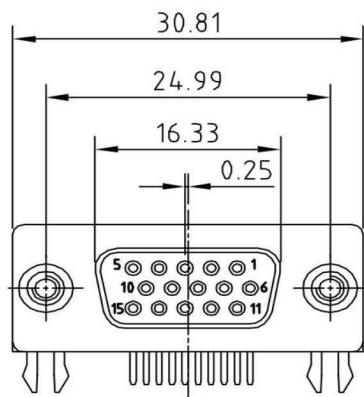

RECOMMEND P.C.B. LAYOUT

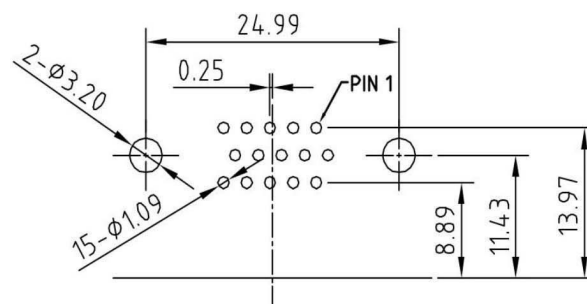

ELECTRICAL CHARACTERISTICS

Contact Current Rating:3Amperes.

Dielectric Withstanding Voltage:AC 500V at sea level.

Insulation Resistance:1000Megohms Min.

Contact Resistance:25Milliohms Max.

Operation Temperature : -55°C to +105°C.

Material

Contact :Copper Alloy.

Insulator:PBT.

Shell: SPCC.

Z-Piece: SPCC

Screw: Copper Alloy.

Rivet: Copper Alloy. or Zinc.

RoHS
Compliant

T&T

Connection System Co., Ltd.

APPD.
核准 HELEN

DWG.
製圖 ABBY

DATE 制表日
2015/11/30

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差
X ±0.30
.XX ±0.25
.XXX ±0.15
Ang. ±2°

SIZE.
紙張尺寸 A 4

REV.
版次 B

PART NAME 品名

HD DSUB FEMALE 15P

PART NO.

料號 HD-15RS