


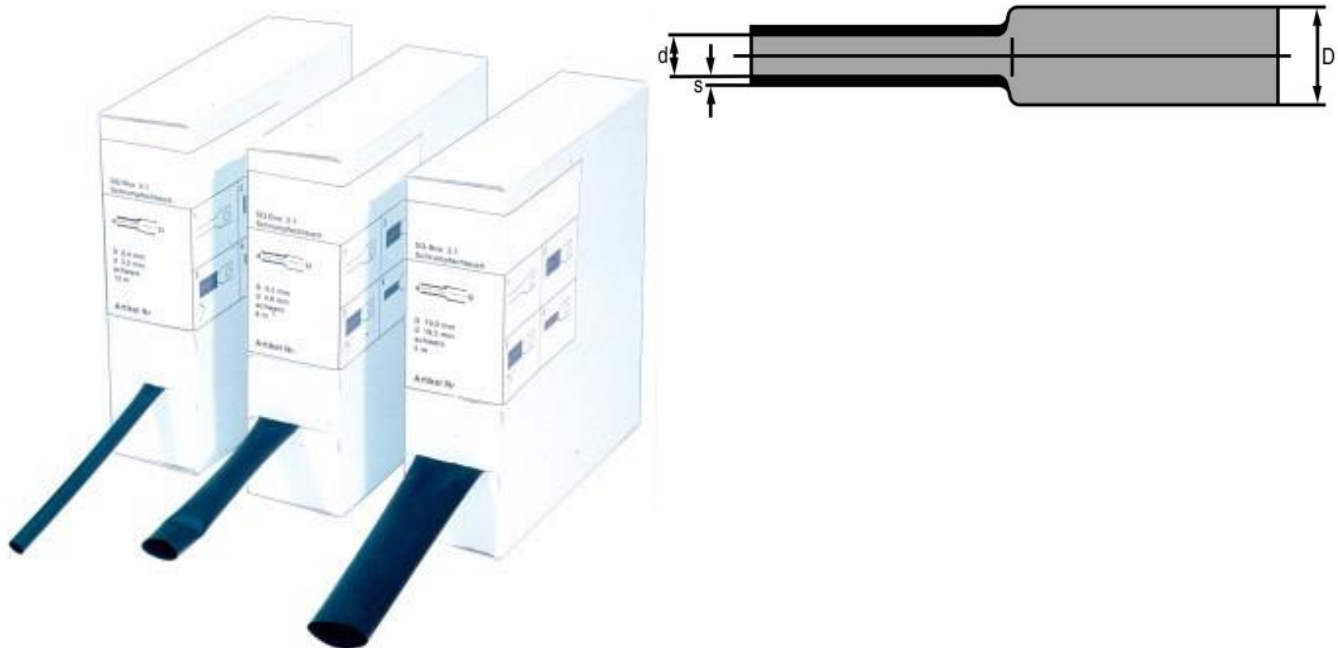

## HIL-SHRINK® 2:1 Heat Shrinkable Tubing, 12,7/6,4 blue

Thin wall flexible heat shrinkable tubings, self extinguishing acc. to UL 224, on small spools in dispenser box

- shrink ratio: 2:1
- permanent operating temperature: -55 °C up to +125 °C material:
- polyolefin cross-linked shrink temperature: +120 °C
- 

### Further information:

- ATTENTION: the transparent tubings are not self extinguishing!

|                                     |            |
|-------------------------------------|------------|
| ArtNr                               | 30064      |
| Inch Ø D                            | 1 / 2"     |
| min. at delivery Ø D [mm]           | 12,7       |
| max after shrink operation Ø d [mm] | 6,4        |
| Huges after shrink op. s [mm]       | 0,64       |
| Coil size [m/box]                   | 8          |
| Material                            | polyolefin |
| Colour                              | blue       |