



高效整流二极管 High Efficient Rectifier


■特征 Features

- I_o 2A
- V_{RRM} 50V-1000V
- 耐正向浪涌电流能力高
High surge current capability
- 封装: 模压塑料
Cases: Molded plastic

■用途 Applications

- 整流用 Rectifier

■外形尺寸和印记 Outline Dimensions and Mark

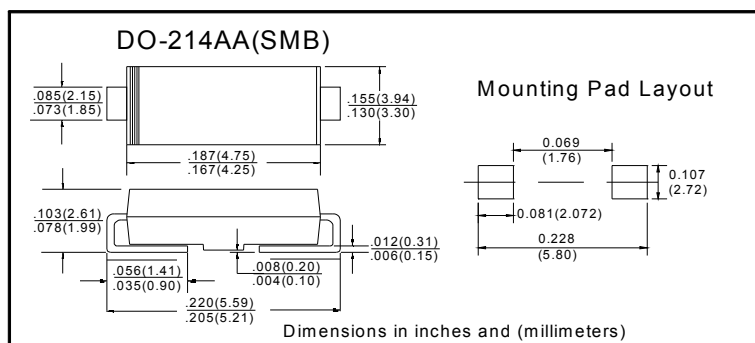

■极限值（绝对最大额定值）

Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Conditions	HS2							
				A	B	D	F	G	J	K	M
反向重复峰值电压 Repetitive Peak Reverse Voltage	V _{RRM}	V		50	100	200	300	400	600	800	1000
正向平均电流 Average Forward Current	I _{F(AV)}	A	正弦半波 60Hz，电阻负载， TL=110℃ 60HZ Half-sine wave, Resistance load, TL =110℃	2.0							
正向（不重复）浪涌电流 Surge(Non-repetitive)Forward Current	I _{FSM}	A	正弦半波 60Hz，一个周期，Ta=25℃ 60Hz Half-sine wave ,1 cycle , Ta =25℃	50							
结温 Junction Temperature	T _J	℃		-55~+150							
储存温度 Storage Temperature	T _{STG}	℃		-55 ~ +150							

■电特性（Ta=25℃ 除非另有规定）

Electrical Characteristics (Ta=25℃ Unless otherwise specified)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition		HS2						
					A	B	D	F	G	J	K
正向峰值电压 Peak Forward Voltage	V _F	V	I _F =2.0A		1.0			1.3		1.7	
最大反向恢复时间 Maximum reverse recovery time	t _{tr}	ns	I _F =0.5A, I _R =1.0A, I _{tr} =0.25A		50				75		
反向漏电流 Peak Reverse Current	I _{RRM1}	μA	V _{RM} =V _{RRM}	T _a =25℃	5.0						
	T _a =100℃			100							
热阻 (典型) Thermal Resistance(Typical)	R _{θJ-A}	℃/W	结和环境之间 Between junction and ambient		80 ¹⁾						
	R _{θJ-L}		结和终端之间 Between junction and terminal		20 ¹⁾						

备注: Notes:

¹⁾ 热阻从结到环境及从结到引线, 在电路板的0.3" x 0.3" (8.0毫米 x 8.0毫米)铜垫片区

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3" x 0.3" (8.0 mm x 8.0 mm) copper pad areas

■特性曲线（典型） Characteristics(Typical)

图1: 正向电流降额曲线
FIG.1: FORWARD CURRENT DERATING CURVE

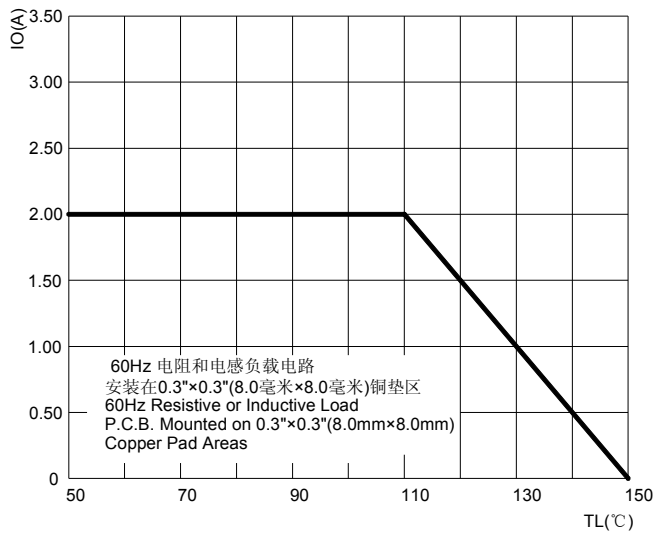


图2: 最大正向浪涌冲击耐受力
FIG.2: MAXIMUM NON-REPETITIVE FORWARD URGE CURRENT

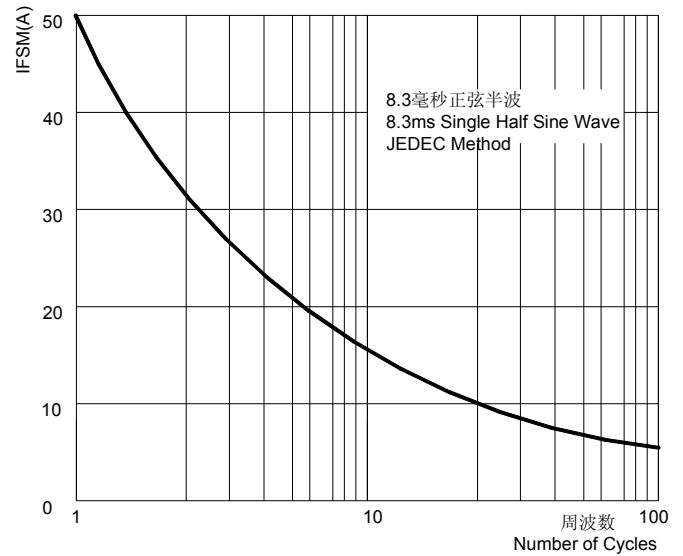


图3: 典型正向特性曲线
FIG.3: TYPICAL FORWARD CHARACTERISTICS

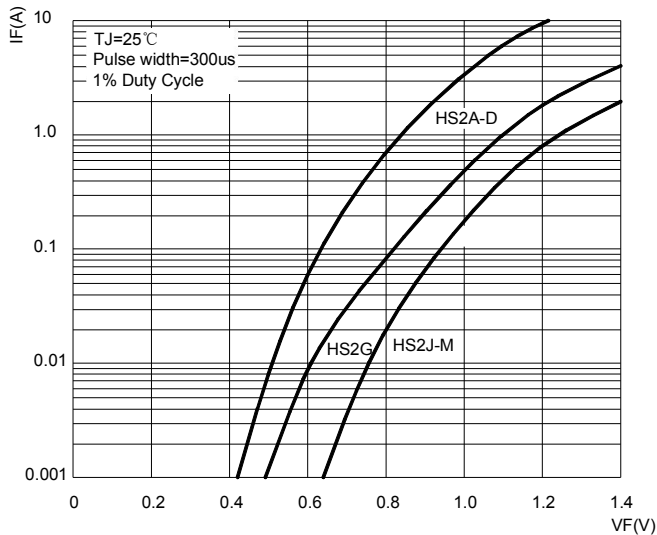


图4: 典型反向特性曲线
FIG.4: TYPICAL REVERSE CHARACTERISTICS

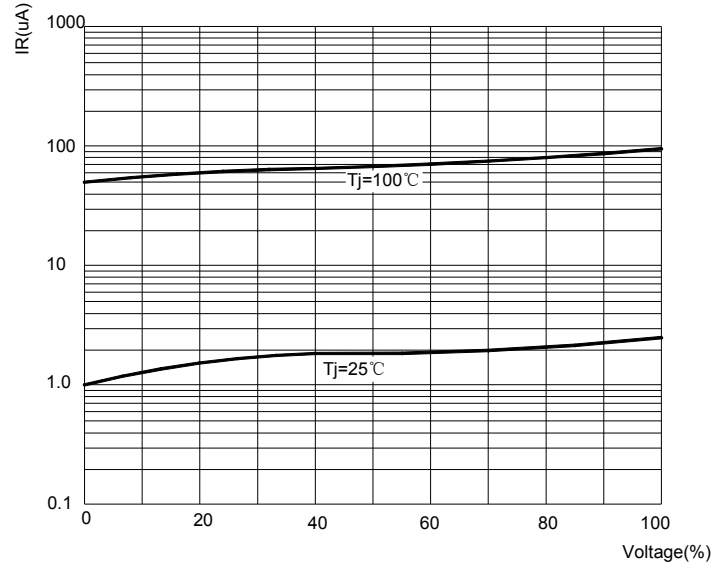


图5: 反向恢复时间试验电路及测试波形示意图
FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

