

1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

A

B

C





D

E



F

G

H

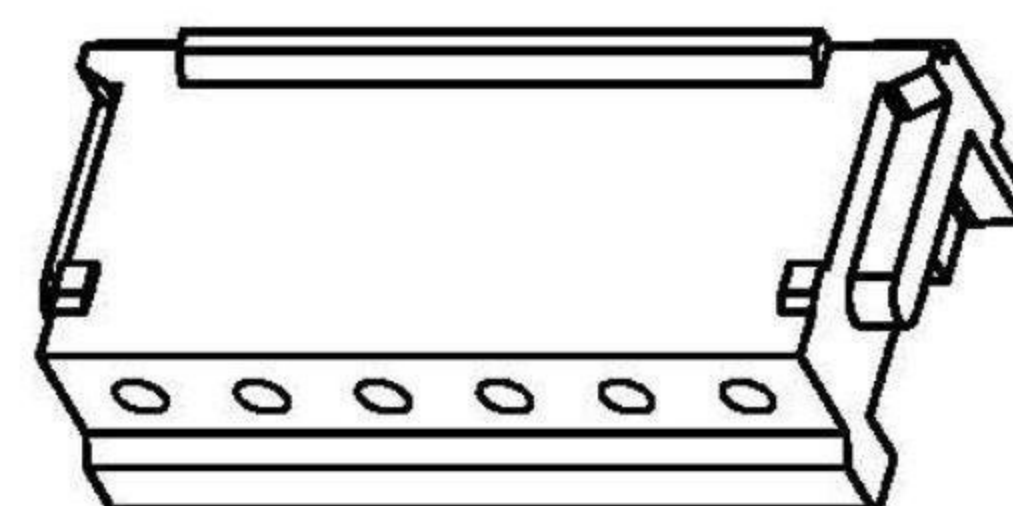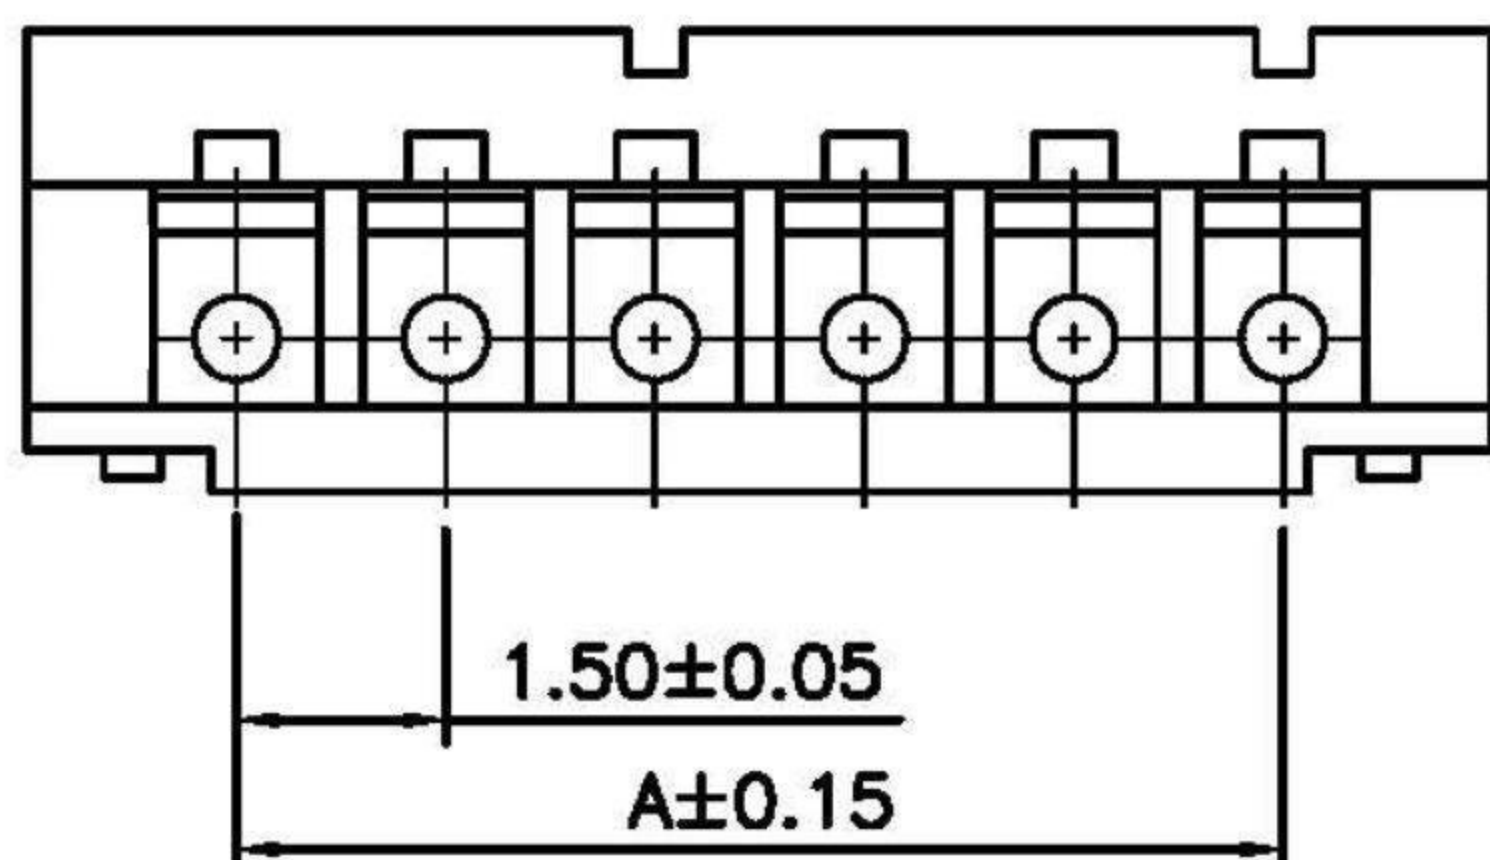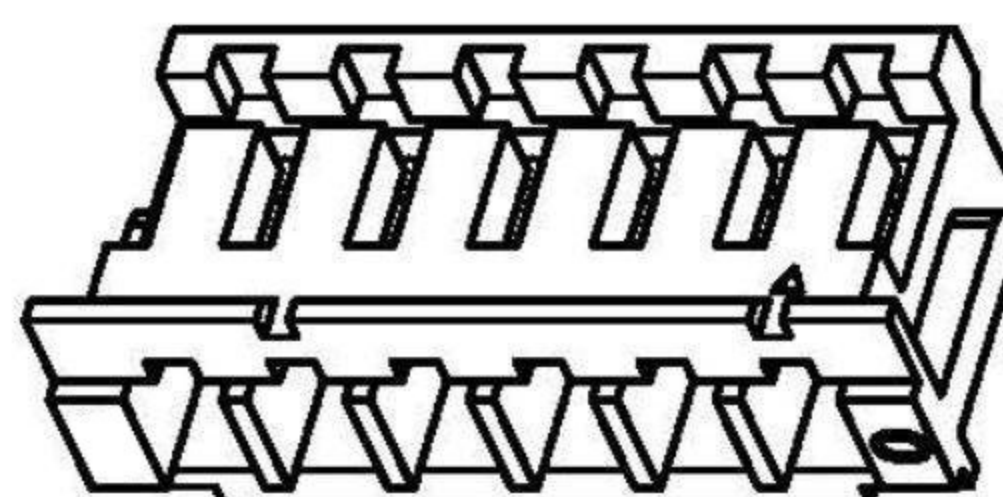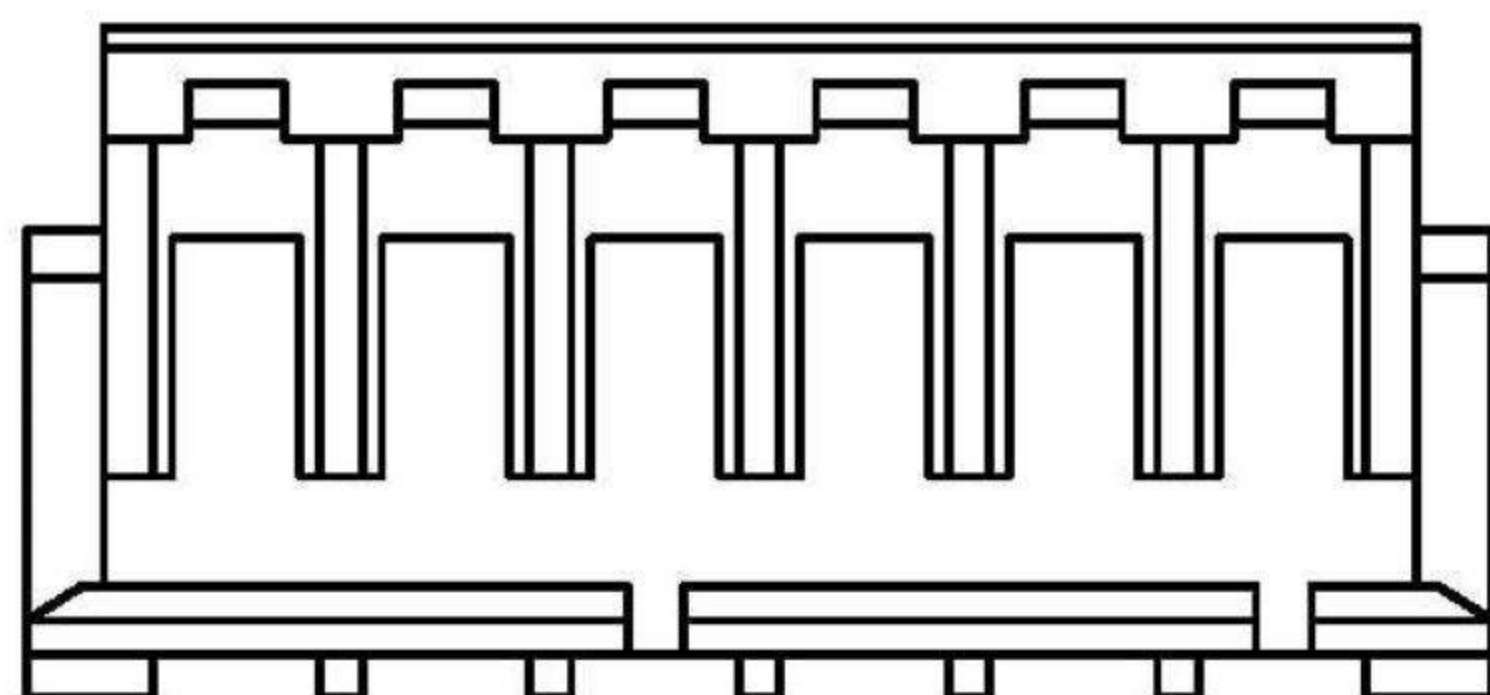

△ 3D VIEW

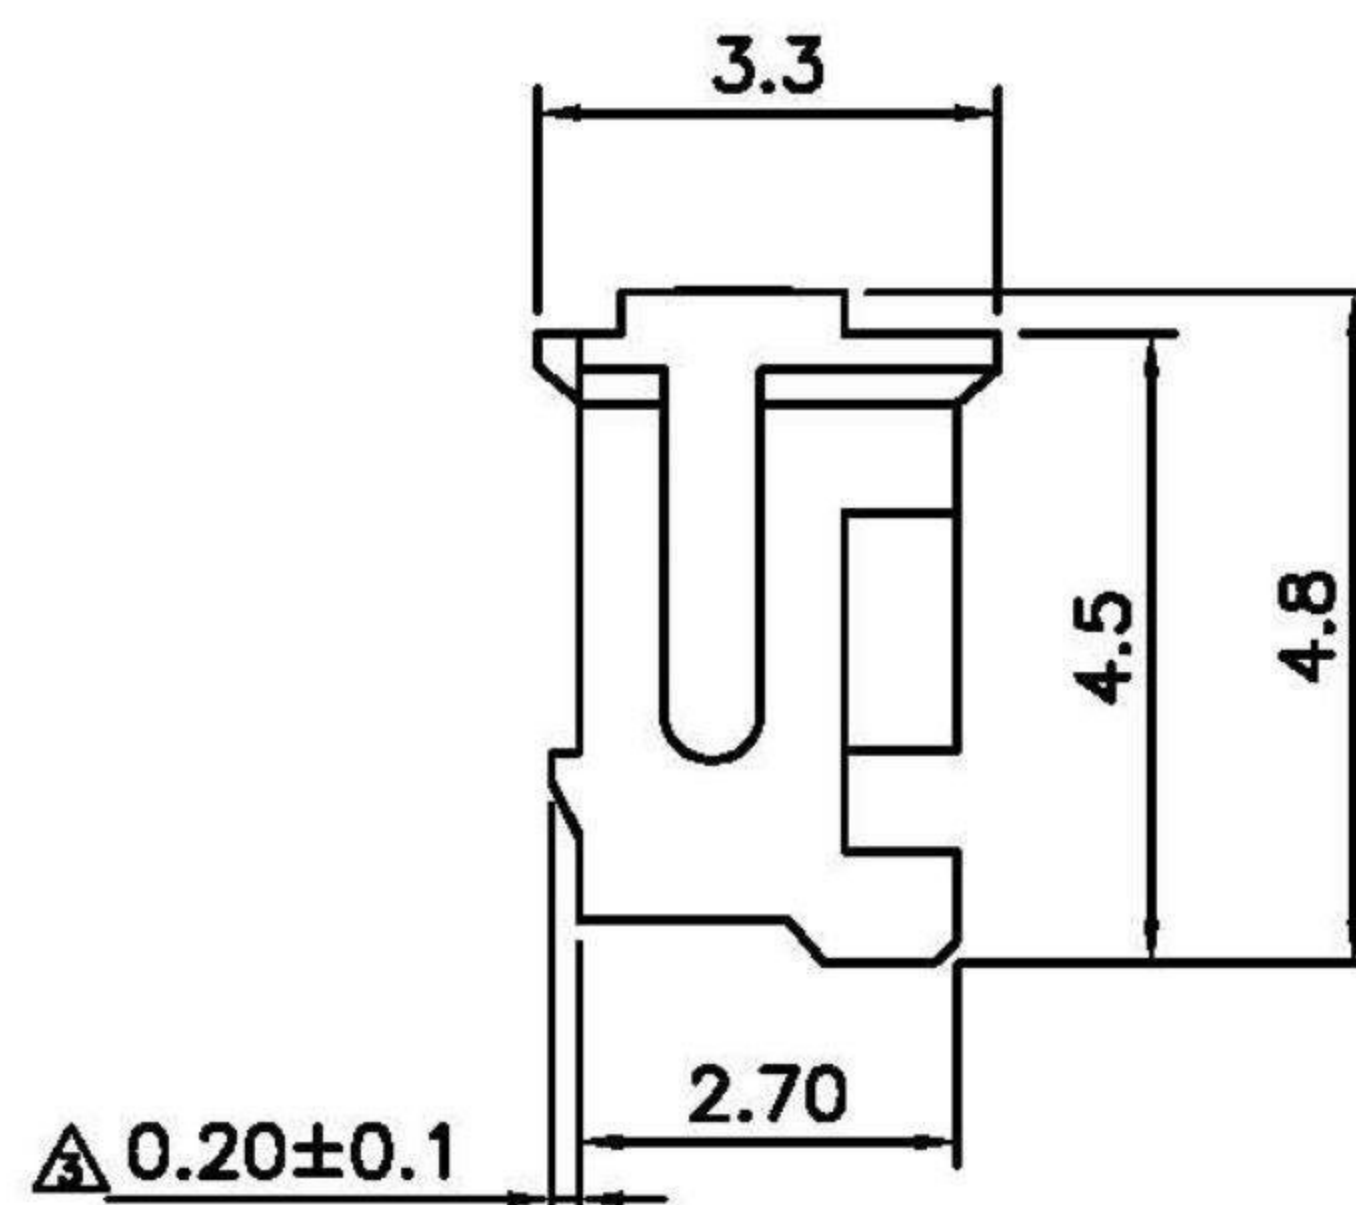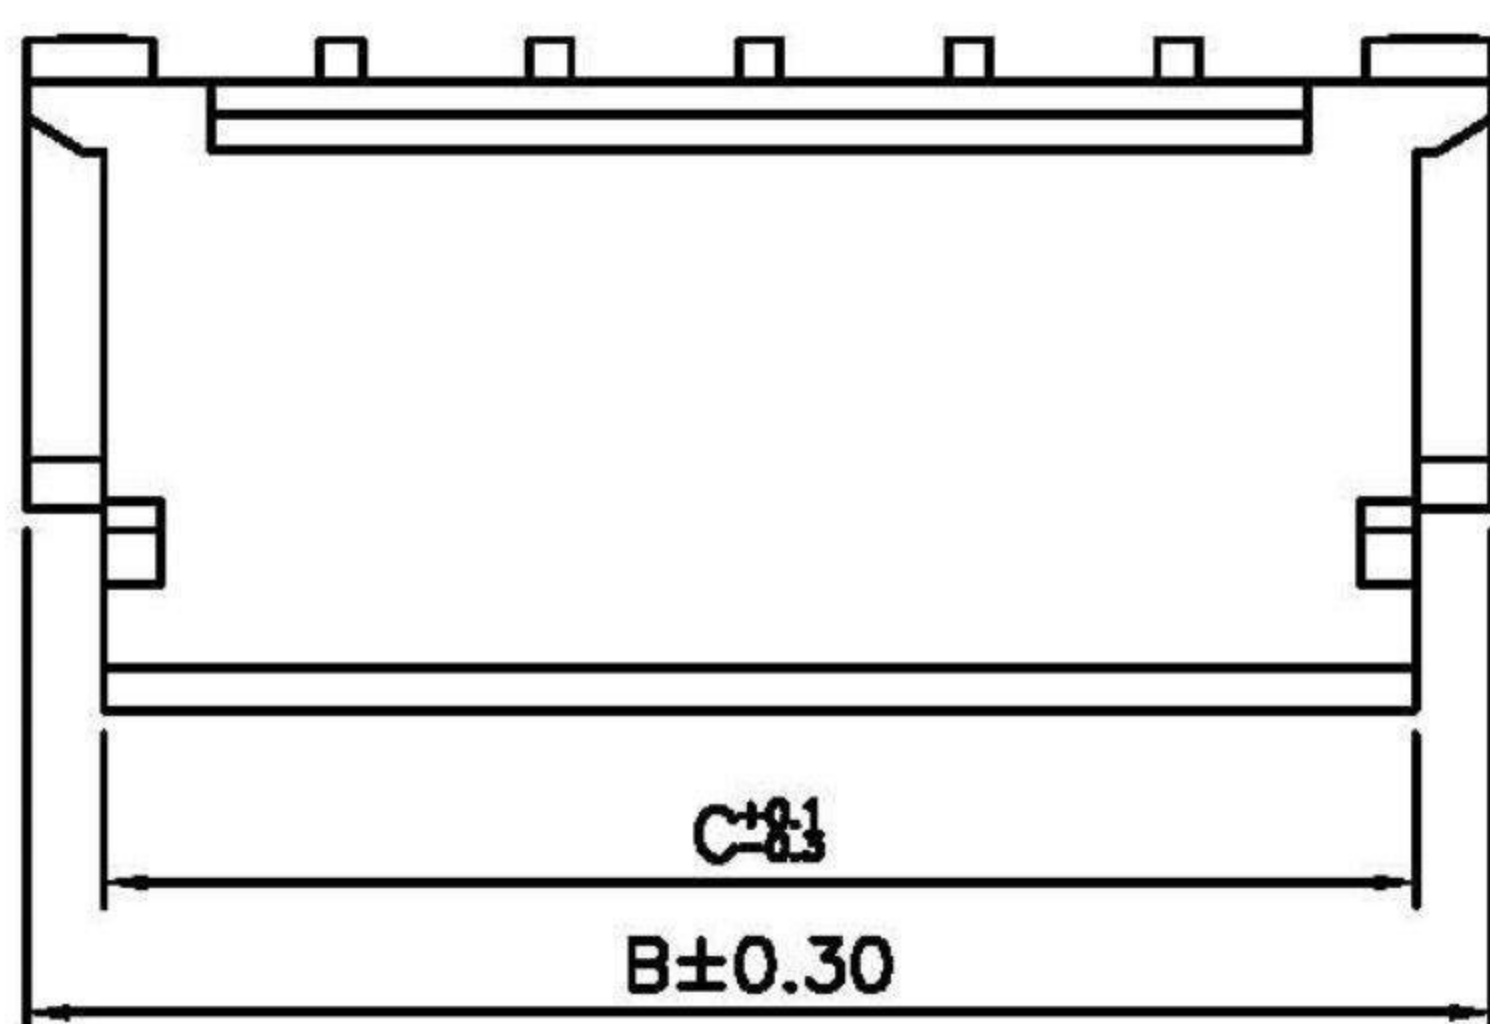**SPECIFICATIONS**

- Current Rating : 1A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 500M Ω min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20m Ω max


HOUSING

- Poles : 2~15
- Material : Nylon 66 UL94V-0

Poles	Dimension(mm)		
	A	B	C
2	1.50	4.50	3.40
3	3.00	6.00	4.90
4	4.50	7.50	6.40
5	6.00	9.00	7.90
6	7.50	10.50	9.40
7	9.00	12.00	10.90
8	10.50	13.50	12.40
9	12.00	15.00	13.90
10	13.50	16.50	15.40
11	15.00	18.00	16.90
12	16.50	19.50	18.40
13	18.00	21.00	19.90
14	19.50	22.50	21.40
15	21.00	24.00	22.90

RoHS
Compliant

Gold Star Connectors Co., Ltd.

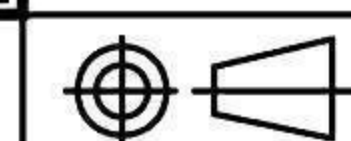APPD.
核准 HELENDWG.
製圖 ABBYDATE 制表日
2011/11/21SCALE
比例 參考UNIT
單位 M MPAGE
張數 1 OF 1TOLERANCE
.0 ±0.30
.00 ±0.20
.000 ±0.10
ANGLE ±1°SIZE.
紙張尺寸 A 4REV.
版次 A

PART NAME 品名

1.5mm CRIMP HOUSE

PART NO.

料號 JNCH150-xxW