

1 2 3 4 5 6 7 8

A

B

C




D

E

F

G

H

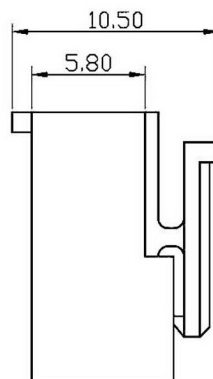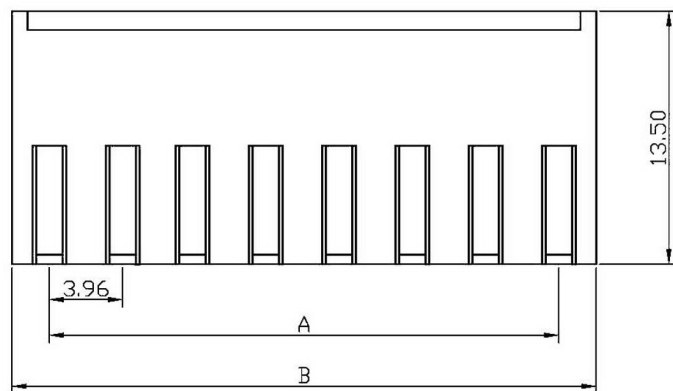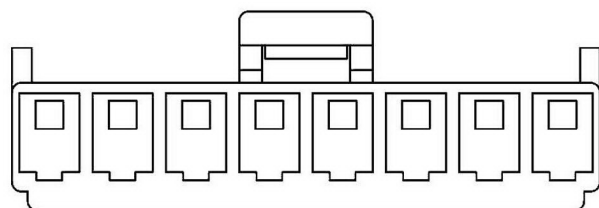

Specifications

Current Rating: 7A AC, DC
Voltage Rating: 250V AC Maximum
Operating Temp: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Terminal Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0

Poles	Dimension mm (in.)	
	A	B
2	3.96 (0.156)	8.04 (0.317)
3	7.92 (0.312)	12.10 (0.476)
4	11.88 (0.468)	15.96 (0.628)
5	15.84 (0.624)	20.00 (0.787)
6	19.80 (0.780)	23.90 (0.941)
7	23.76 (0.935)	27.90 (1.098)
8	27.72 (1.074)	31.86 (1.254)
9	31.68 (1.247)	35.88 (1.413)
10	35.64 (1.403)	39.84 (1.569)
11	39.60 (1.559)	43.74 (1.722)
12	43.56 (1.715)	47.74 (1.880)
13	47.52 (1.871)	51.70 (2.035)
14	51.48 (2.027)	55.66 (2.191)


RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准
Betty

DWG.
製圖
Betty

DATE 制表日
2013/02/01



SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差
.0 ± 0.5
.00 ± 0.3
ANG. ±

SIZE
紙張尺寸 A 4

REV.
版次 B

PART NAME 品名

HOUSING 3.96mm WHITE

PART NO.

料號 JNCH396-xx

1 2 3 4 5 6 7 8