





- * Poles: 2-13
- * Material: Insulator: NYLON UL94V-0 (IVORY)
- * Contact: 0.5mm(.020") round pin, brass, tin plated

Specifications

- * Current rating: 0.7A AC, DC
- * Voltage rating: 50V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 500MΩ min.
- * Withstand voltage: 500V AC/minute
- * Applicable PC board thickness: .047" (1.2mm)

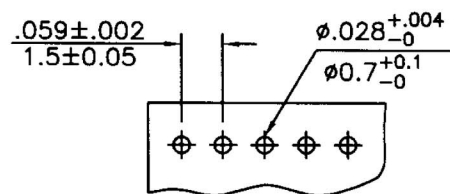

P.C. Board Layout

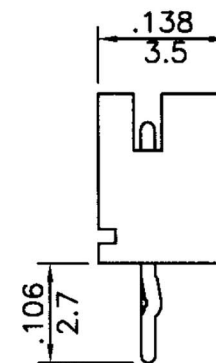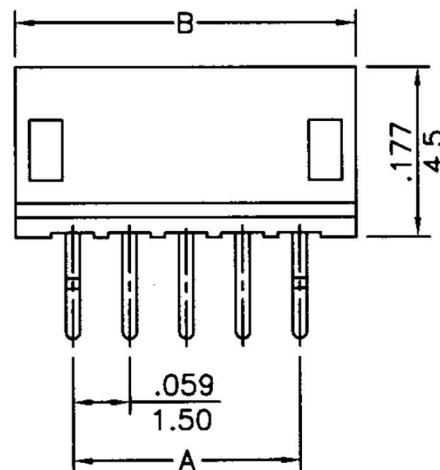

CIRCUITS	DIMENSION in.(mm)		CIRCUITS	DIMENSION in.(mm)	
	A	B		A	B
2	0.059(1.50)	0.177(4.5)	8	0.413(10.50)	0.531(13.5)
3	0.118(3.00)	0.236(6.0)	9	0.472(12.00)	0.591(15.0)
4	0.177(4.50)	0.295(7.5)	10	0.531(13.50)	0.650(16.5)
5	0.236(6.00)	0.345(9.0)	11	0.591(15.00)	0.709(18.0)
6	0.295(7.50)	0.413(10.5)	12	0.650(16.50)	0.768(19.5)
7	0.345(9.00)	0.472(12.0)	13	0.709(18.00)	0.827(21.0)

RoHS
Compliant

APPD.
核准

DWG.
製圖 Hedy

DATE 制表日
2012/01/30



SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 / 1

TOLERANCE
容許公差
.0 ±
.00 ±
ANG. ±

SIZE.
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

1.5mm STRAIGHT WAFER

PART NO.

料號 JNCW150-xxS