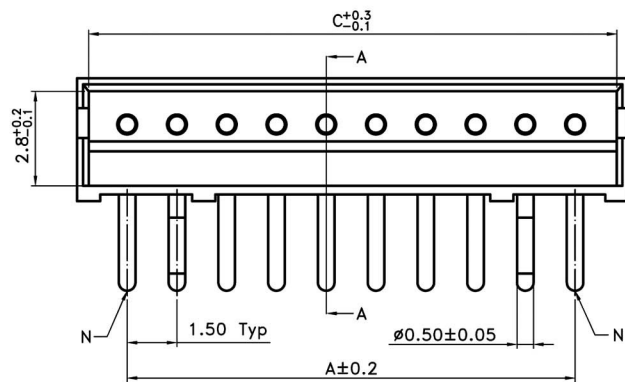
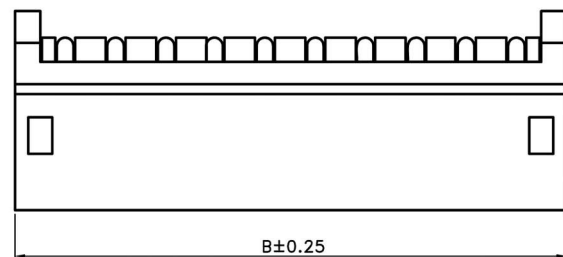
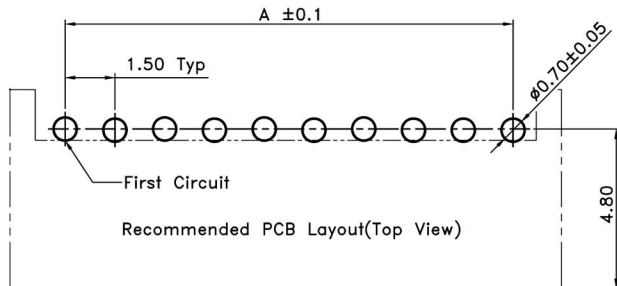


■ SPECIFICATIONS

- Voltage Rating : 50V AC/DC
- Current Rating : 1A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 500M Ω min
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 20m Ω max

■ WAFER

- Poles : 2~13(Right Angle)
- Material : Contact : Brass, Tin Plated
Base : Nylon 66 UL94V-0 + Glass Fiber

KInK

Circuit	Circuit No.					
	1	2	3	4	5	6~13
2	KInK	KInK				
3	KInK		KInK			
4	KInK			KInK		
5~13	N	KInK			KInK	N

Poles	Dimensions(mm)		
	A	B	C
2	1.50	4.50	3.60
3	3.00	6.00	5.10
4	4.50	7.50	6.60
5	6.00	9.00	8.10
6	7.50	10.50	9.60
7	9.00	12.00	11.10
8	10.50	13.50	12.60
9	12.00	15.00	14.10
10	13.50	16.50	15.60
11	15.00	18.00	17.10
12	16.50	19.50	18.60
13	18.00	21.00	20.10


RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准 Hedy

DWG.
製圖 Helen

DATE 制表日
2010/05/11



SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 / 1

TOLERANCE
容許公差

SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 / 1

PART NAME 品名

1.5mm RIGHT ANGLE WAFER

PART NO.

料號 JNCW150-xxR