

1 2 3 4 5 6 7 8

A

B

C




D

E


F

G

H

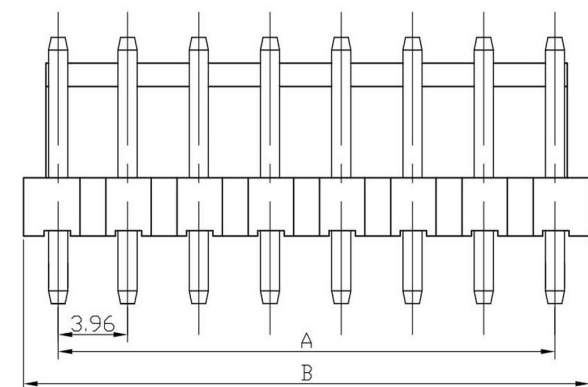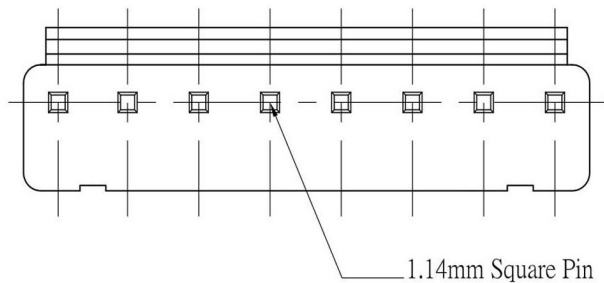

RECOMMENDED P.C.BOARD HOLE DIMM.



Specifications

Current Rating: 7A AC, DC
Voltage Rating: 250V AC Maximum
Operating Temp: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Terminal Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0

Poles	Dimension mm (in.)	
	A	B
2	3.96 (0.156)	7.92 (0.312)
3	7.92 (0.312)	11.92 (0.469)
4	11.88 (0.468)	15.84 (0.624)
5	15.84 (0.624)	19.84 (0.781)
6	19.80 (0.780)	23.80 (0.937)
7	23.76 (0.935)	27.88 (1.098)
8	27.72 (1.074)	31.74 (1.250)
9	31.68 (1.247)	35.86 (1.412)
10	35.64 (1.403)	39.90 (1.571)
11	39.60 (1.559)	43.84 (1.726)
12	43.56 (1.715)	47.92 (1.887)
13	47.52 (1.871)	51.72 (2.036)
14	51.48 (2.027)	55.92 (2.202)

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准
Betty

DWG.
製圖
Betty

DATE 制表日
2013/02/01



SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1



TOLERANCE
容許公差
.0 ± 0.5
.00 ± 0.35
ANG. ±

SIZE.
紙張尺寸 A 4

REV.
版次 B

PART NAME 品名

WAFER 3.96mm STRAIGHT

PART NO.

料號 JNCW396-xx

1 2 3 4 5 6 7 8