

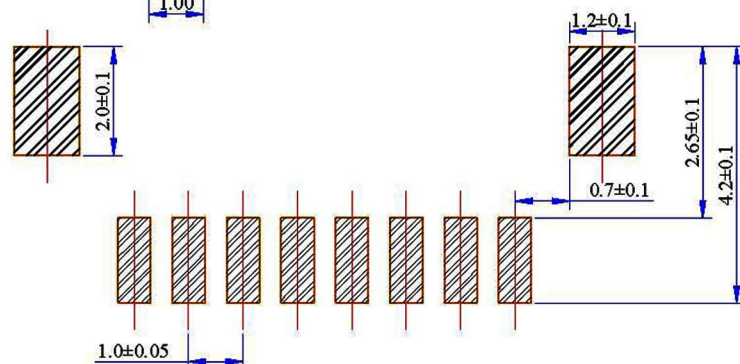
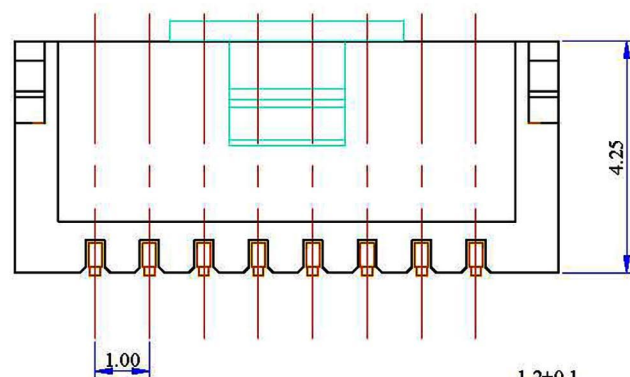


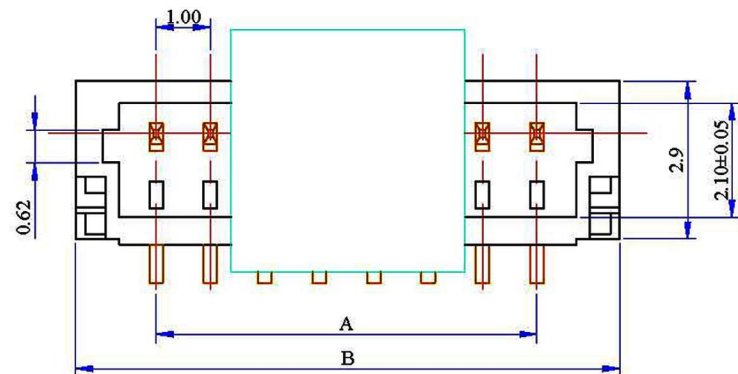

RECOMMENDED P.C. BOARD PATTERN DIM.



Specifications

Electrical

Voltage Rating: 50V(AC)

Current Rating: 1.0A

Contact Resistance: 20mΩ max.

Dielectric Withstanding Voltage: 500V AC/1min.

Insulation Resistance: 100M Ω min.

Material and Finish

Circuits: 2~15

Insulator: Nylon 6T, UL94V-0

Color: Natural

Contact: Phosphor Bronze, Tin-Plated

Temperature Range: -25°C~+85°C

Poles	Dimension mm (in.)	
	A	B
2	1.0(0.039)	4.0(0.157)
3	2.0(0.079)	5.0(0.197)
4	3.0(0.118)	6.0(0.236)
5	4.0(0.157)	7.0(0.276)
6	5.0(0.197)	8.0(0.315)
7	6.0(0.236)	9.0(0.354)
8	7.0(0.276)	10.0(0.394)
9	8.0(0.315)	11.0(0.433)
10	9.0(0.354)	12.0(0.472)
11	10.0(0.394)	13.0(0.512)
12	11.0(0.433)	14.0(0.551)
13	12.0(0.472)	15.0(0.591)
14	13.0(0.512)	16.0(0.630)
15	14.0(0.551)	17.0(0.669)
16	15.0(0.590)	18.0(0.708)
20	19.0(0.748)	22.0(0.866)

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准



TOLERANCE
容許公差

PART NAME 品名

SCALE
比例

X.XX ± 0.15
X.X ± 0.25

1mm SINGLE ROW
TOP ENTRY WAFER

DWG.
製圖

Hedy

UNIT
單位

SIZE.
紙張尺寸

PART NO.

DATE 制表日

2009/12/25

PAGE
張數

REV.
版次

JNCWS10-xxS-SMD