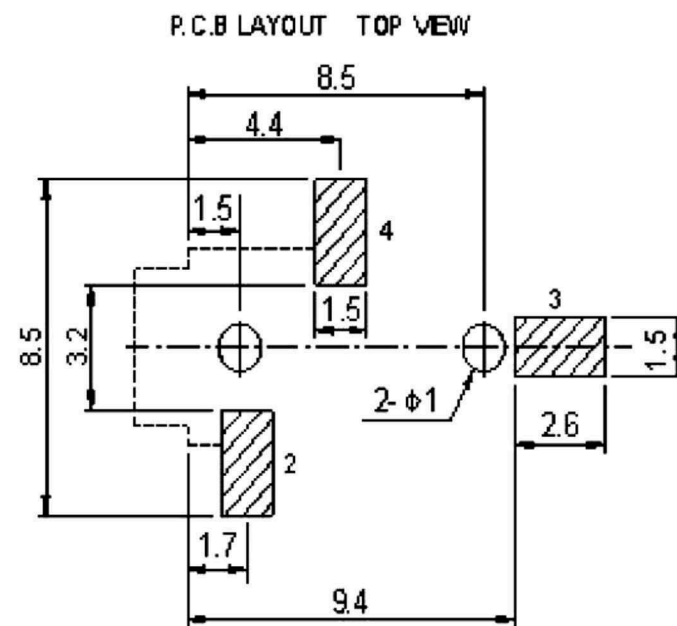
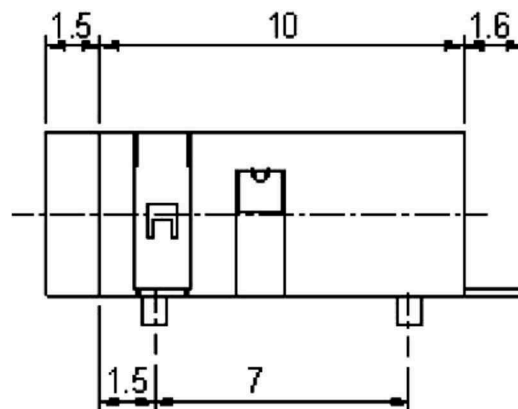
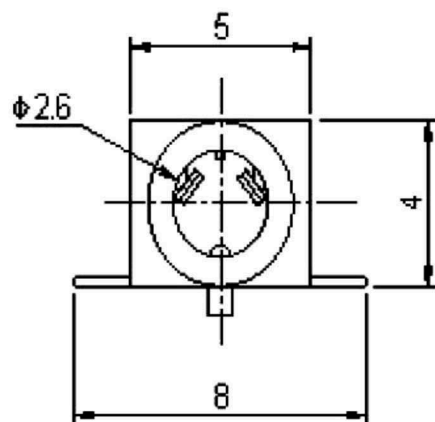


RATING: DC30V 0.3A
 WITHSTAND VOLTAGE: AC500V(50Hz)/min
 CONTACT RESISTANCE: $\leq 30\text{m}\Omega$
 INSULATION RESISTANCE: $\geq 100\text{M}\Omega$
 WITHDRAW FORCE: 3-25N
 LIFE TEST: 5,000 cycles

6				
5				
4				
3				
2	TERMINAL	BRASS	3	Ag-Plating
1	HOUSING	PA66	1	BLACK
NO.	DESCRIPTION	MATERIAL	QTY.	PLATING

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD. 核准 Betty	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 SMT PHONE JACK, BLACK
DWG. 製圖 Betty	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. 料號 JS25-05
DATE 制表日 2012/10/23	PAGE 張數 1 OF 1	REV. 版次 A	