



DATE	DESCRIPTION	REV.


FRONT SHELL










INSERTED BODY



REAR SHELL



ASSEMBLED PLUG

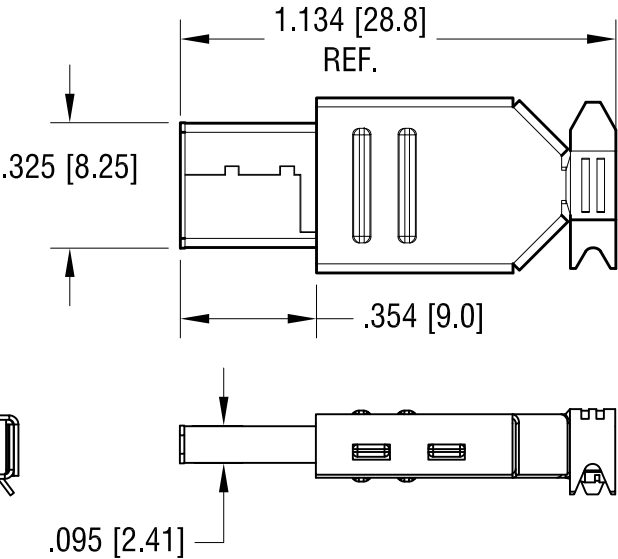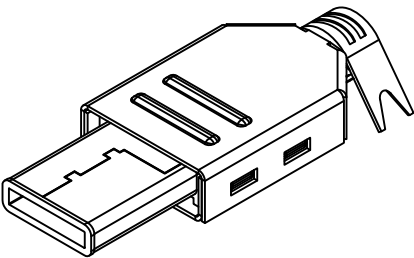

- NOTE:
- 1.SHELL: METAL, NICKEL PLATED
 - 2. CONTACT: MAT'L COPPER, GOLD PLATE
 - 3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC FOR 1 MIN.
 - 4. OPERATING TEMPERATURE -55°C TO +85°C

- 5. LOW LEVEL CONTACT RESISTANCE:.
INITIAL: 40mOHMS FOR ALL CONTACT MAX.
AFTER: 10mOHMS MAX. CHANGE
INSULATION RESISTANCE- 1000 MegoOHMS MIN.
DIELECTRIC STRENGTH: 1000 Vac Rms 60Hz. 1Min.

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME		USB 3.1 TYPE C PLUG	
MATERIAL		AS NOTED	
FINISH		DRN BY	DATE
AS NOTED		NT	4.14.15
		APPD	SCALE
		LN	3X
TOLERANCES		CODE	DWG NO.
INCH [MM]		C	954
DECIMAL ± .010 [± 0.25]			
ANGULAR ± 1°			
UNLESS OTHERWISE SPECIFIED			