


Heatsink insert modules



- 3 U insert modules with side panels made of heatsink profile, optimal heat dissipation due to fluted cooling fins
- profiles with ventilation slots and internal guiding ridges
- rear panel cut-out for connectors DIN 41612, designs B, C, D, F and H
- front panel treatments, further heights or HP's on request
- front panel, rear panel and profile transparent passivated, heatsink black anodised

A = front panel; **B** = screening plate, right side; **C** = screening plate, left side; **D** = for threaded rail or nut M 2.5; **E** = heatsink **SK 421**; **F** = tab, perforated; **G** = rear panel; **H** = plastic cover **GLK**; **K** = guiding ridge in the subrack; **L** = internal card guide; **M** = drilling for card; **N** = profile **GP 199** → N 76

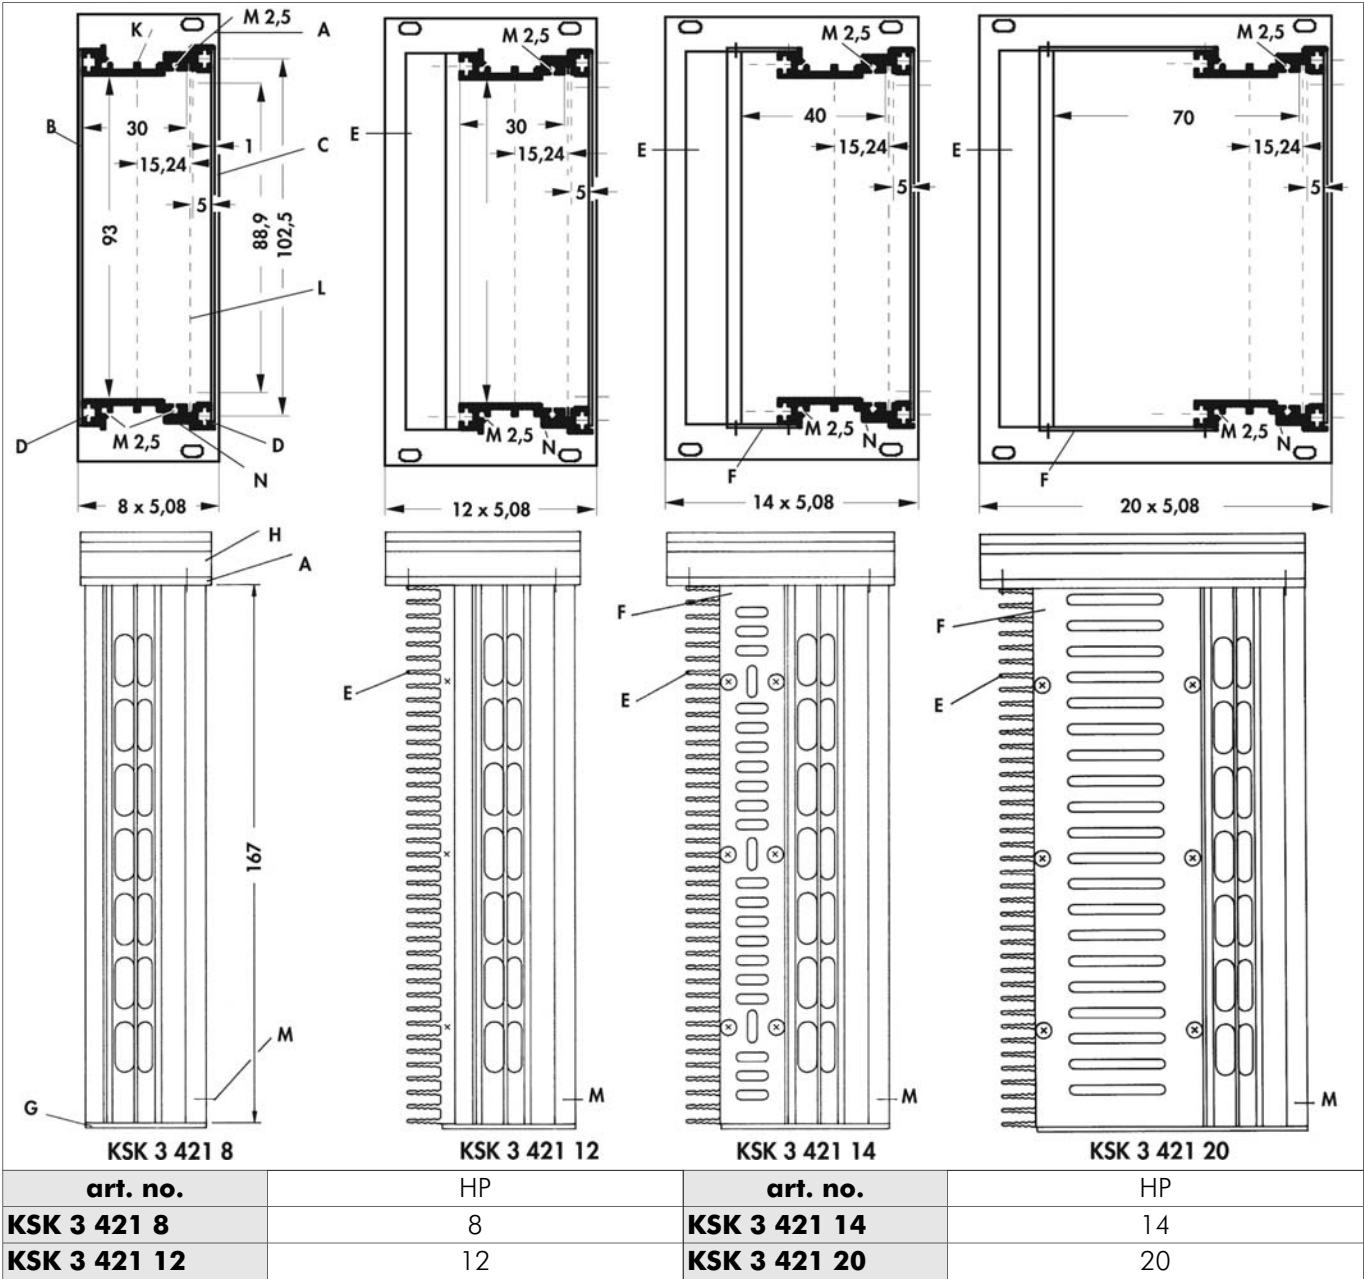

19" subracks
19" front panels
Special subracks
19" instert modules accessory

→ N 19 – 23
→ N 67
→ N 24
→ N 25 – 28

Part front panels
Part front panels with SMD-brackets
Guide rail
Profiles for insert modules 6 U

→ N 52 – 58
→ N 57
→ N 27
→ N 80