

# LD-BZEN-1201




LD-BZEN-1201

| Type                       | Unit               | LD-BZEN-1201 |
|----------------------------|--------------------|--------------|
| Rated Voltage              | V                  | 1.5          |
| Operating Voltage          | V                  | 1-2          |
| *Rated Current(MAX)        | mA                 | 30           |
| *Min Sound Output at 10 cm | dB                 | 80           |
| Coil Resistance            | $\Omega$           | 16 $\pm$ 4   |
| *Resonant Frequency        | Hz                 | 2400         |
| Operating Temperature      | $^{\circ}\text{C}$ | -20 - +70    |
| Storage Temperature        | $^{\circ}\text{C}$ | -30 - +80    |
| Housing Material           |                    | NORYL        |
| Weight                     | g                  | 2            |

\*Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

## FREQUENCY RESPONSE:

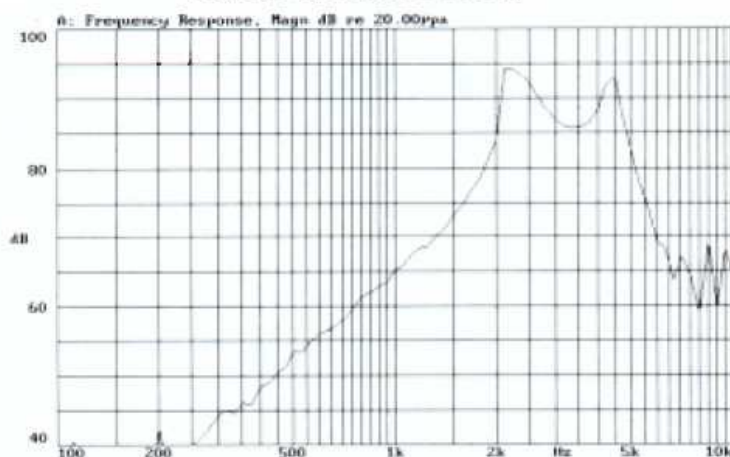

## DIMENSIONS:

UNIT:mm  
Tolerance:  $\pm 0.5\text{mm}$   
Wave Solderable and Washable

