



硅整流二极管 General Purpose Rectifier


■特征 Features

- I_o 1.0A
- V_{RRM} 50V-1000V
- 耐正向浪涌电流能力高
High surge current capability
- 封装：模压塑料
Cases: Molded plastic

■用途 Applications

- 整流用 Rectifier

■外形尺寸和印记 Outline Dimensions and Mark

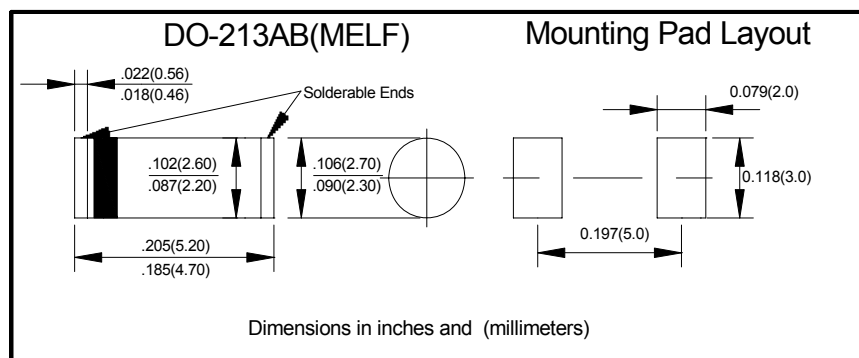

■极限值（绝对最大额定值）

Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Conditions	LL40						
				01	02	03	04	05	06	07
反向重复峰值电压 Repetitive Peak Reverse Voltage	V_{RRM}	V		50	100	200	400	600	800	1000
正向平均电流 Average Forward Current	$I_{F(AV)}$	A	正弦半波 60Hz, 电阻负载, $T_a=75^{\circ}\text{C}$ 60HZ Half-sine wave, Resistance load, $T_a=75^{\circ}\text{C}$	1.0						
正向（不重复）浪涌电流 Surge(Non-repetitive)Forward Current	I_{FSM}	A	正弦半波 60Hz, 一个周期, $T_a=25^{\circ}\text{C}$ 60Hz Half-sine wave, 1 cycle, $T_a=25^{\circ}\text{C}$	30						
结温 Junction Temperature	T_J	$^{\circ}\text{C}$		-55~+150						
储存温度 Storage Temperature	T_{STG}	$^{\circ}\text{C}$		-55 ~ +150						

■电特性（ $T_a=25^{\circ}\text{C}$ 除非另有规定）Electrical Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition	LL40						
				01	02	03	04	05	06	07
正向峰值电压 Peak Forward Voltage	V_F	V	$I_F=1.0\text{A}$	1.1						1.2
反向漏电流 Peak Reverse Current	I_{RRM1}	μA	$V_{RM}=V_{RRM}$	$T_a=25^{\circ}\text{C}$						
	I_{RRM2}			$T_a=125^{\circ}\text{C}$						
热阻(典型) Thermal Resistance(Typical)	$R_{\theta J-A}$	$^{\circ}\text{C}/\text{W}$	结和环境之间 Between junction and ambient	75 ¹⁾						
	$R_{\theta J-T}$		结和终端之间 Between junction and terminal	30 ²⁾						

备注: Notes:

¹⁾ 热阻从结到环境, 每个终端0.24" x 0.24" (6.0毫米 x 6.0毫米)铜垫片

Thermal resistance from junction to ambient, 0.24" x 0.24" (6.0 mm x 6.0 mm) copper pads to each terminal

²⁾ 热阻从结到终端, 每个终端0.24" x 0.24" (6.0毫米 x 6.0毫米)铜垫片

Thermal resistance from junction to terminal, 0.24" x 0.24" (6.0 mm x 6.0 mm) copper pads to each terminal

■特性曲线（典型） Characteristics(Typical)

图1: 正向电流降额曲线
FIG.1: FORWARD CURRENT DERATING CURVE

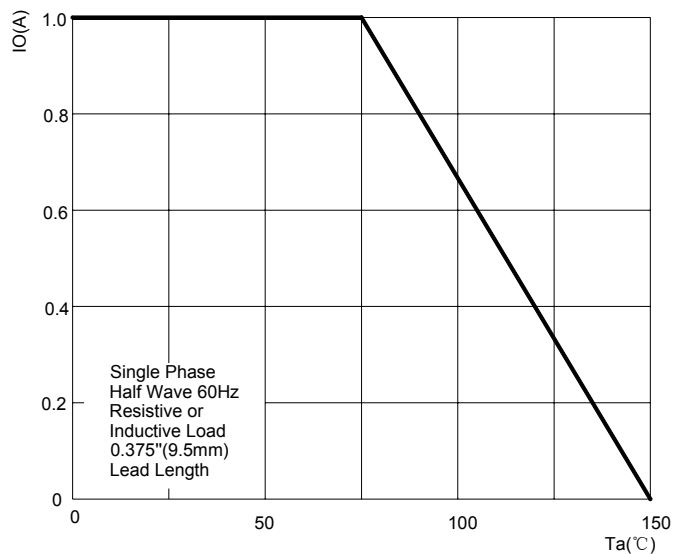


图2: 最大正向浪涌冲击耐受力
FIG.2: MAXIMUM NON-REPETITIVE FORWARD URGE CURRENT

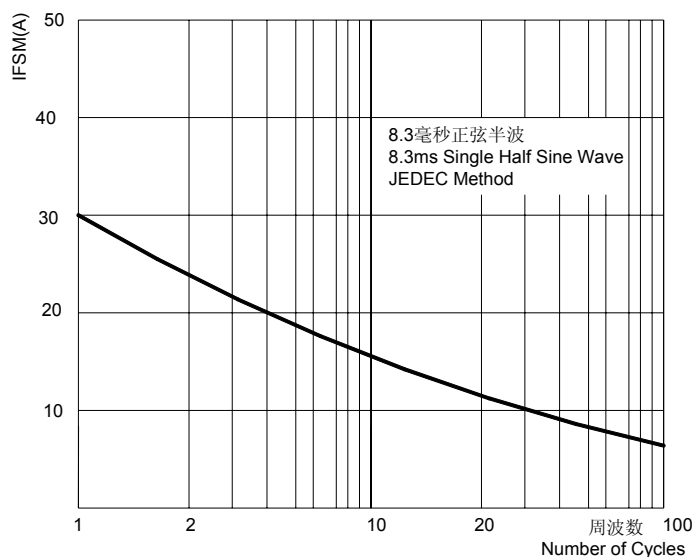


图3: 典型正向特性曲线
FIG.3: TYPICAL FORWARD CHARACTERISTICS

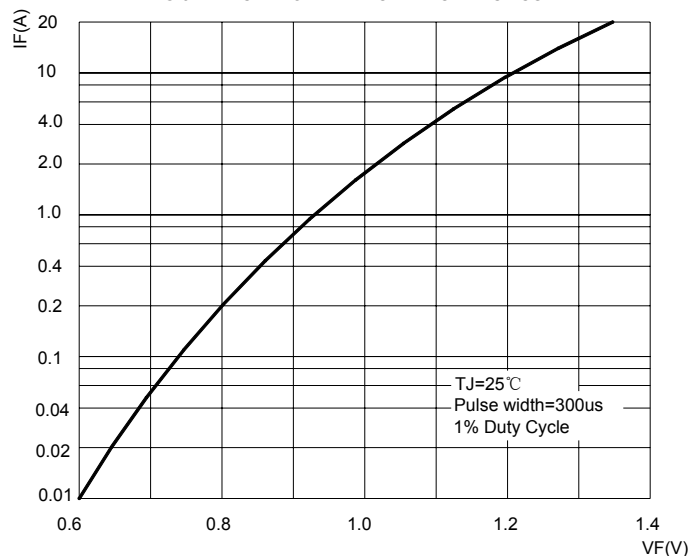


图4: 典型反向特性曲线
FIG.4: TYPICAL REVERSE CHARACTERISTICS

