

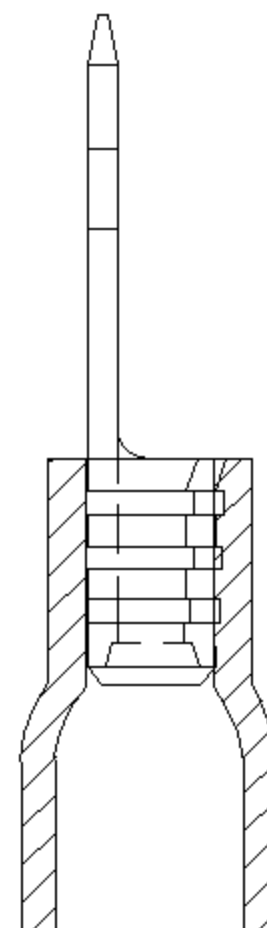


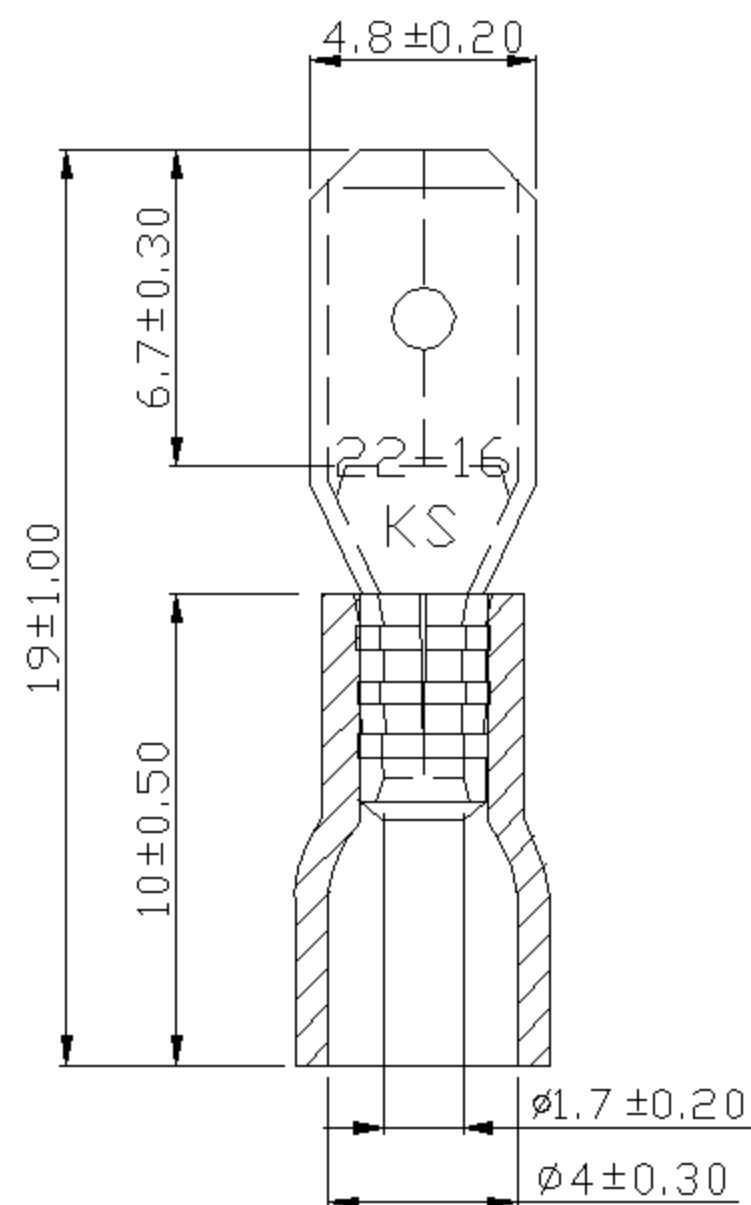

NOTE:

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	3	4	7	10
2. MAXIMUM ELECTRICAL RATING : 75°C 300 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : RED
5. TERMINAL MATERIAL : BRASS
6. WIRE RANGE : 22-16 A.W.G.(0.5-1.5mm²)
7. TERMINALS SURFACE TREATMENT : TIN PLATED
8. TERMINALS THICKNESS : 0.4 mm
9. NEMA TAB : 0.032 * 0.187 (0.8 * 4.75)

Tolerance Unless Otherwise Specified			
0 > 6 mm	±0.20	ANGLE	
6 > 18 mm	±0.30	0°	REF ±
18 > 30 mm	±0.40	°	±
30 > 75 mm	±0.50	°	±

NAME	VINYL-INSULATED MALE DISCONNECTORS				UNIT	mm	
PART NO.	MDV1-187(8)	MATERIAL	-----	APPROVE	張馨尹		
NUMBER	KA-94202-C	SCALE	SHEET	PAGE	CHECKED		
DATE	2006/06/14	4/1	1-0	10F2	DRAWN	張馨尹	

KST® K.S. TERMINALS INC.