
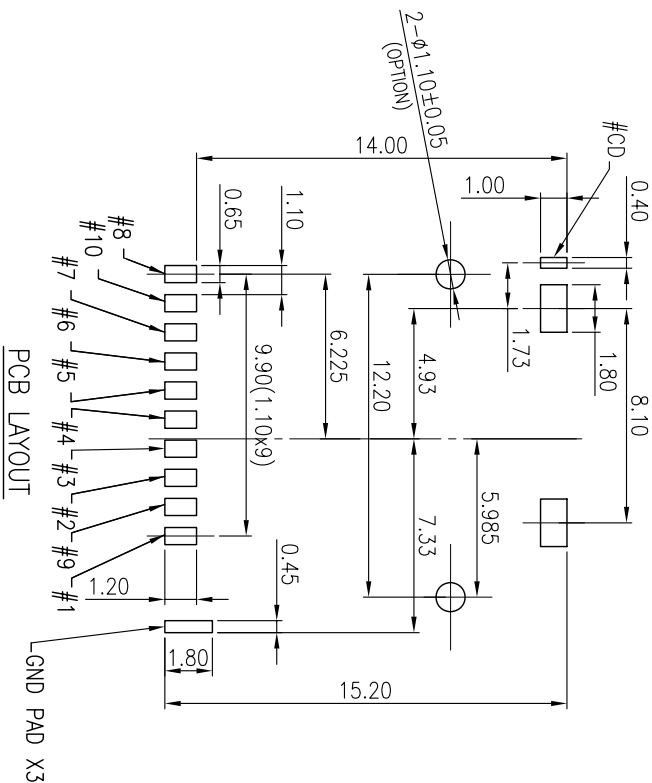
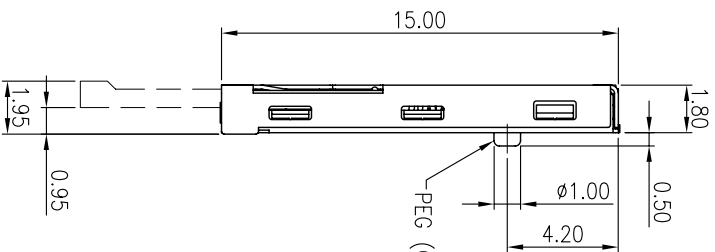
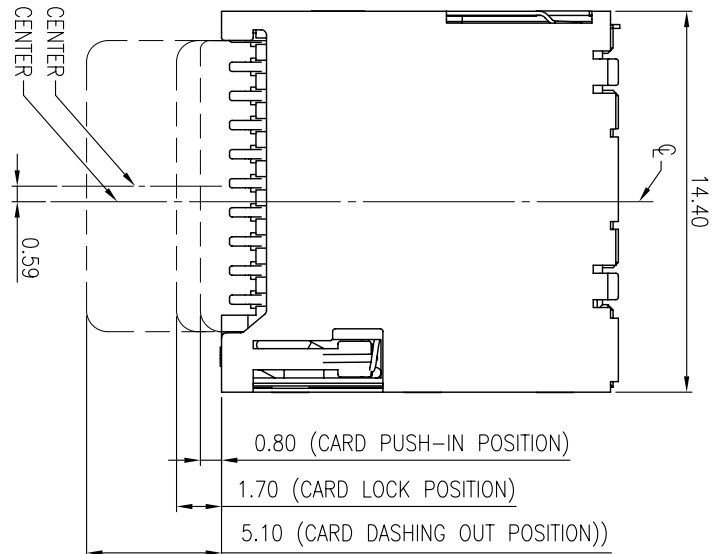


PIN ASSIGNMENT:

#1	DATA2
#2	DATA3
#3	CMD
#4	VDD
#5	CLK
#6	VSS
#7	DATA0
#8	DATA1 ²
#9	RFIO4
#10	RFIO4
#CD	CD

CIRCUIT:



MATERIAL:
INSULATOR: HI-TEMP THERMOPLASTIC, UL 94V-0, COLOR: BLACK.
CONTACT: PHOSPHOR BRONZE

REVISIONS						
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE
Δ				Δ		
Δ				Δ		
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!						213

ORDER INFORMATION:
MSD005-Rt10GX-P
MSD: MICRO SD SOCKET
005: SERIES NO.
Rt: PCB TYPE, RIGHT ANGLE SURFACE MOUNT
10: 10 PINS
GX: CONTACT PLATING OPTION
Gt: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER AREA
G10t: 10u" GOLD ON CONTACT, TIN PLATED ON SOLDER AREA
P: WITH PEG (OPTION)

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE		MODEL	
±0.25		DRAWN	AARON	28/JUN/10		TITLE	MICRO SD A&B TYPE & T-FLASH (PUSH-PUSH TYPE)
SYMBOL	UNIT	SCALE	CHECKED	PEGGY	28/JUN/10	NO.	MSD005-Rt10G-P
Δ	mm	1/2	APPROVALS				

MMT CORPORATION