
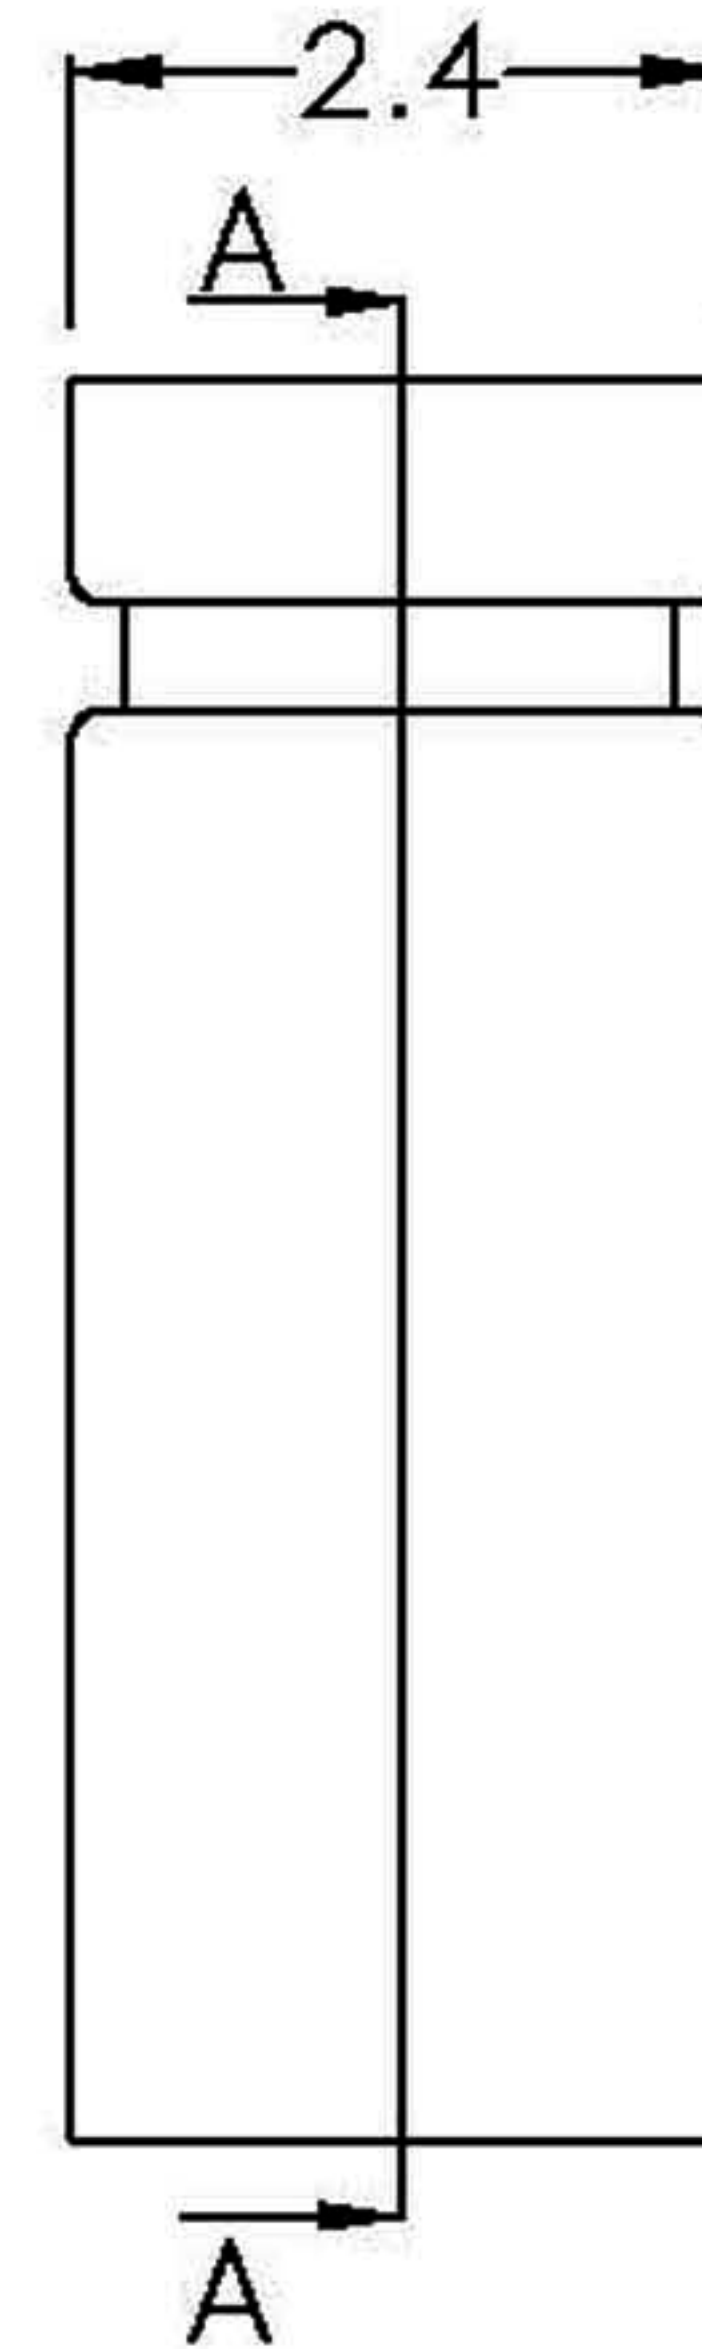


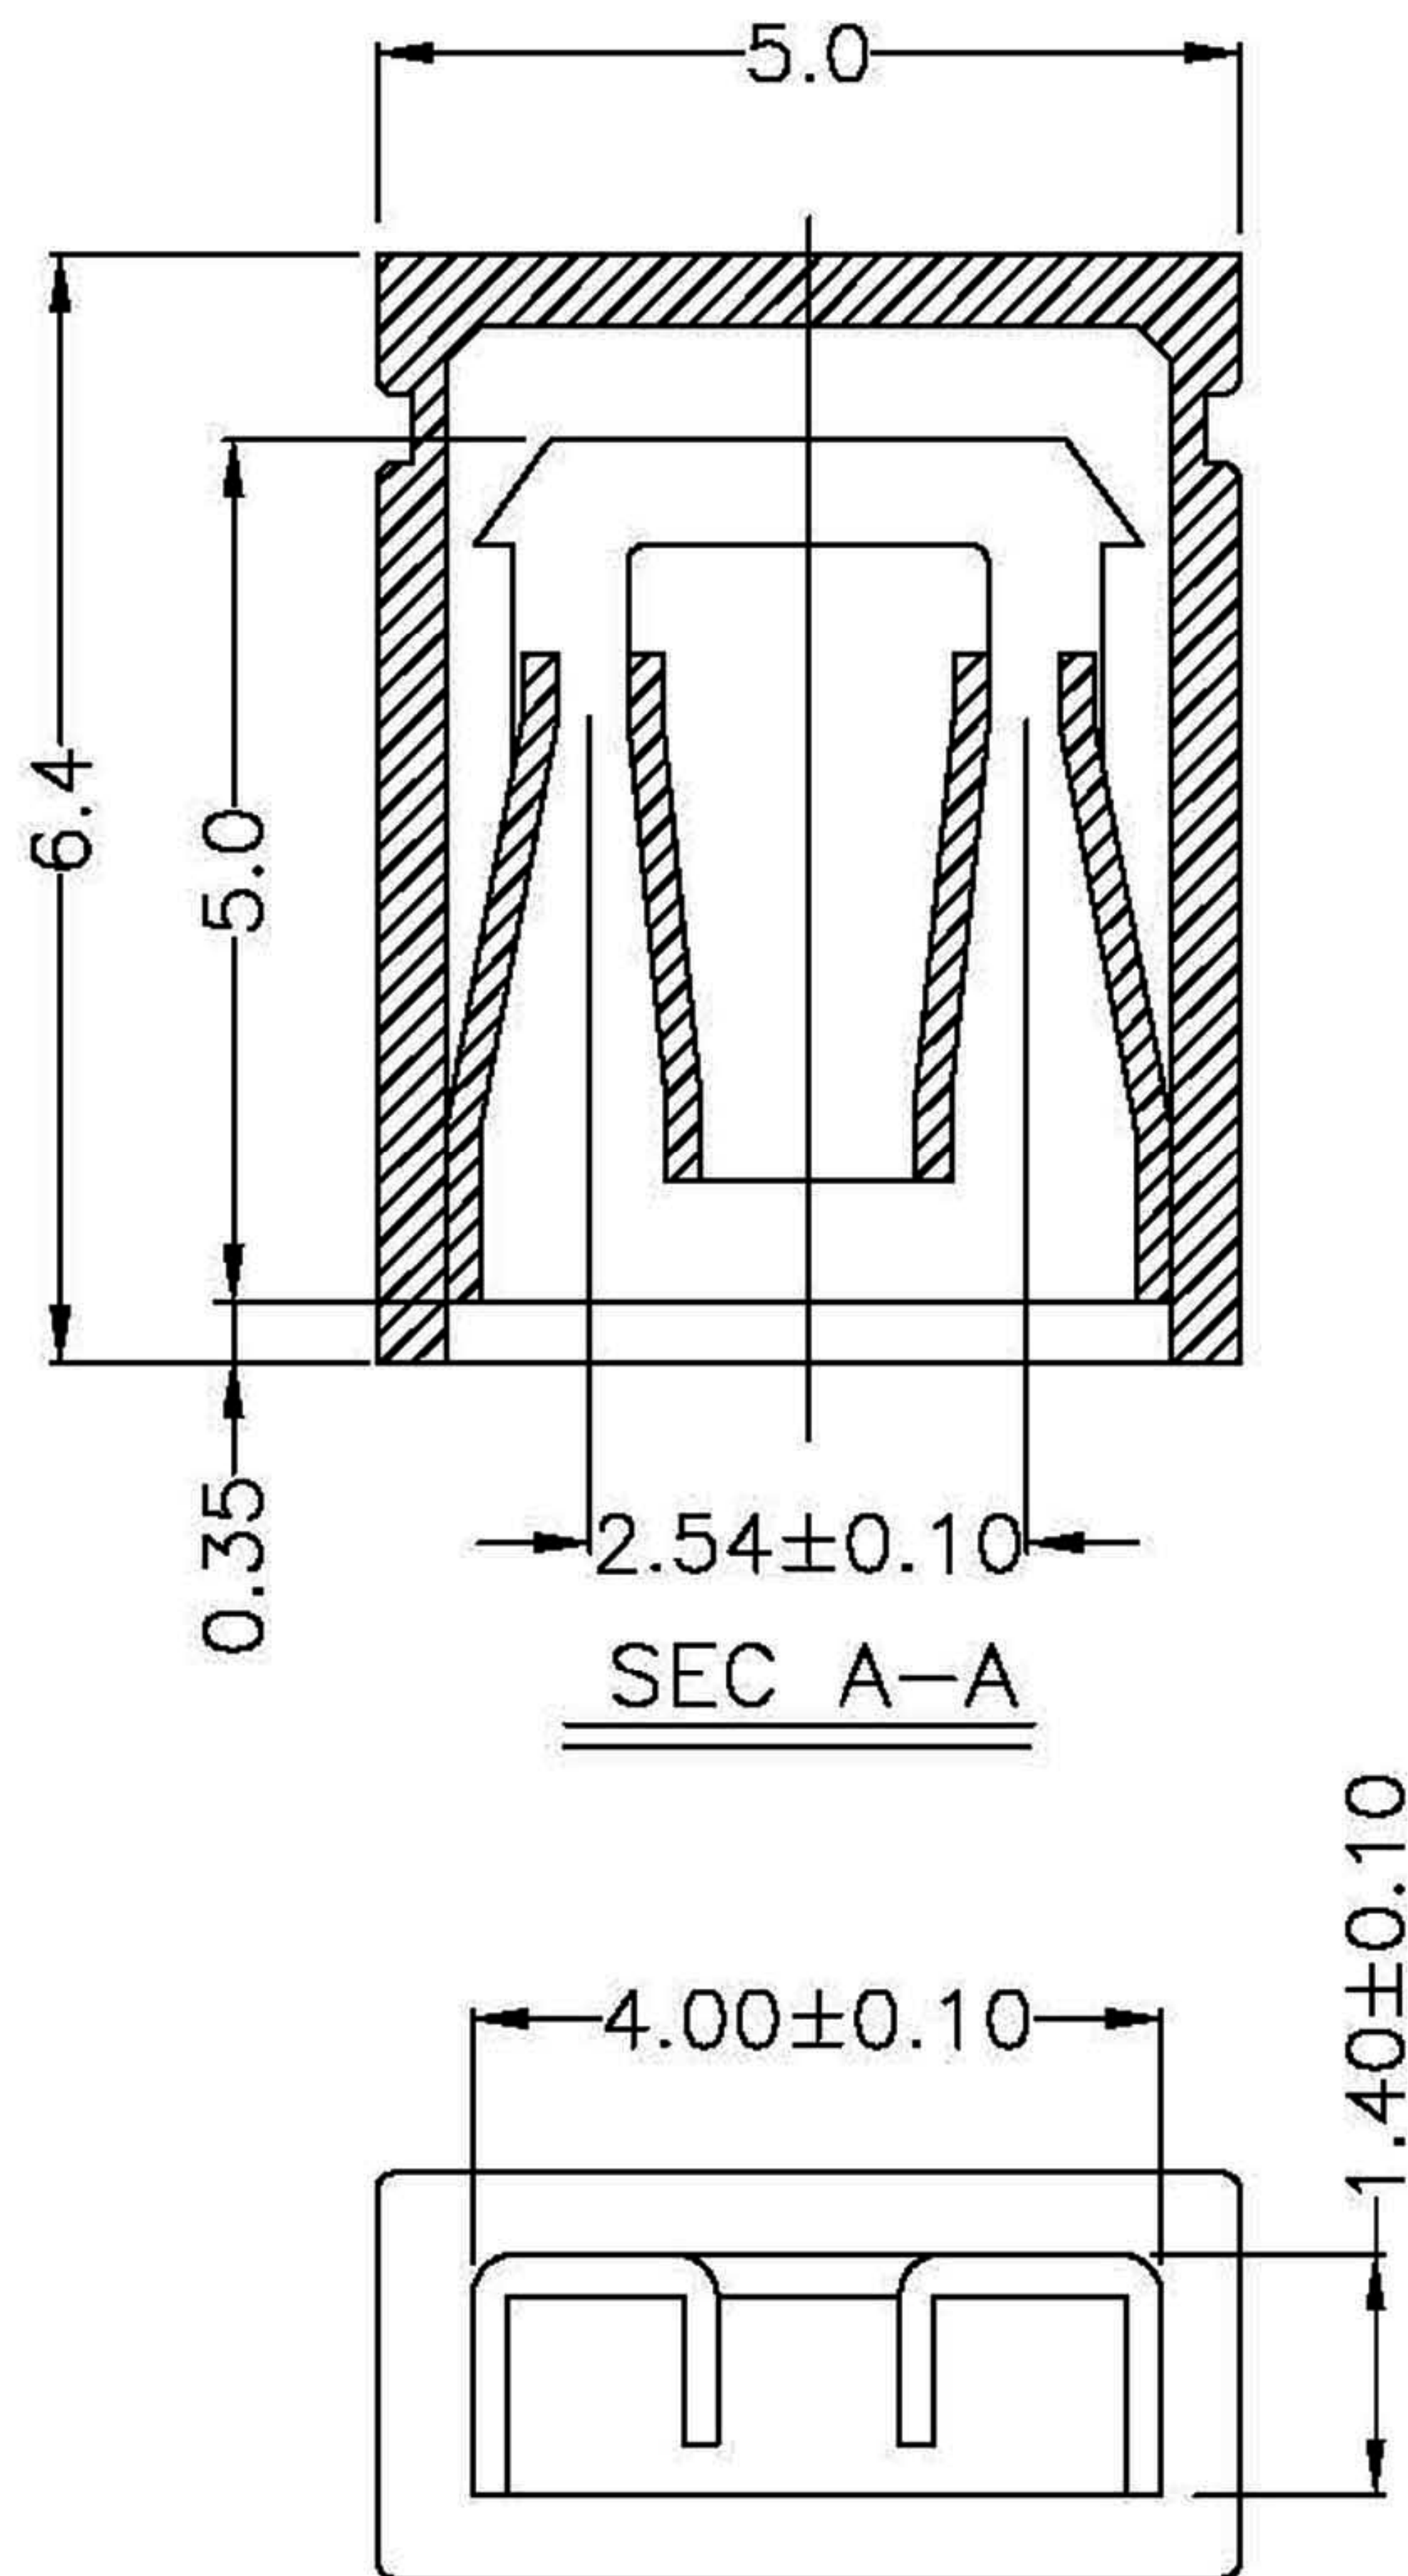

NOTES

1.MATERIAL

1.1 Insulator:PBT+15% G.F. UL-94V-0

2.SPECIFICATION

2.1 Current Rating: 3Amp

2.2 Dielectric Withstading : AC 500V/min.R.M.S.

2.3 Insulator Resistance: 1000M ohms Min

2.4 Contact Resistance: 20m ohms Max

2.5 Operation Temperature: -55 °C to +85 °C

2.6 Contact retention force: 0.91 kg MIN.

2.7 Insertion force: 420g MAX. per contact.(pin gauge SQ. 0.64mm)

2.8 Withdrawal force: 28g MIN.per contact.(pin gauae SQ. 0.64mm)

x: Y Yellow

- Black

R Red

B Blue

W White


RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准 Angel

DWG.
製圖 Yumi

DATE 制表日
2008/04/01

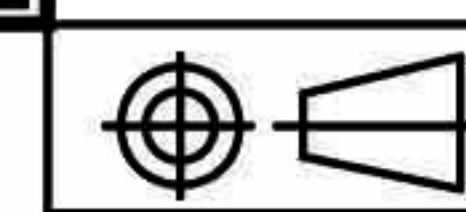

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

DIMENSIONS TOLERANCE

METRIC
.0 = ±.20
.00 = ±.10
.000 = ±.005
ANG. = ±2°

SIZE.
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

2.54mm JUMPER 2P H=6.5mm
CLOSED GOLD PLATING ROHS

PART NO.

料號 MJC-6MM/x