

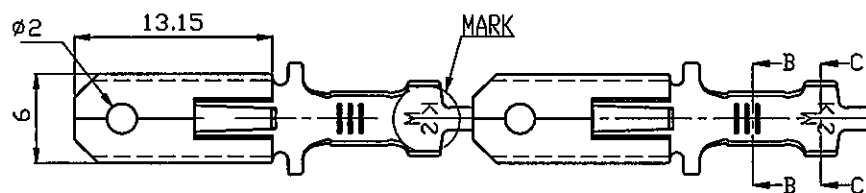



ITEM NO.	WIRE RANGE(mm ²)	SURFACE TREATMENT	MARKING	W1	H1	W2	H2
1 MS250-01B9	0.3-0.5 mm ²	None	S K.S	5.0	5.0	2.9	2.7
2 MS250-01B2		Tin					
3 MS250-01BT		Pre-Tin					
4 MM250-01B9	0.85-1.25 mm ²	None	M K.S	5.0	5.0	3.6	3.4
5 MM250-01B2		Tin					
6 MM250-01BT		Pre-Tin					

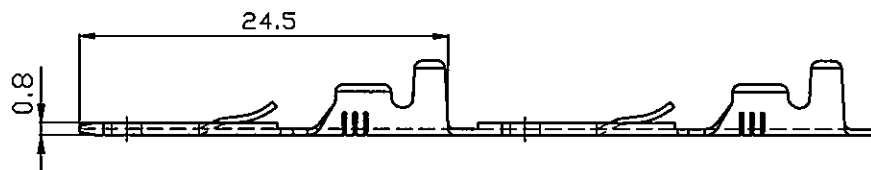

REV	DESCRIPTION	DATE
△	RDK-93050	黃騰蓉 2004/03/09
△	RDK-93093	林曉淳 2004/04/23
△	RDK-93116	張馨尹 2004/05/20
△	RDK-93251	張馨尹 2004/12/13
△	RDK-98198	蔡宗儒 2010/11/09



Section "C-C"
4/1



Section "B-B"
4/1

NOTE:
1.THICKNESS : 0.4mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° > ° REF ±
18 > 30 mm ± 0.40	° > ° ±
30 > 75 mm ± 0.50	° > ° ±

NAME	250 TYPE SERIES MALE TERMINAL	UNIT	mm	①
PART NO.	See Chart	MATERIAL	BRASS	APPROVE
NUMBER	KT-93026-C	SCALE	SHEET	PAGE
DATE	2004/01/27	2/1	1-5	10F2
DRAWN	黃騰蓉			

KST. K.S. TERMINALS INC.