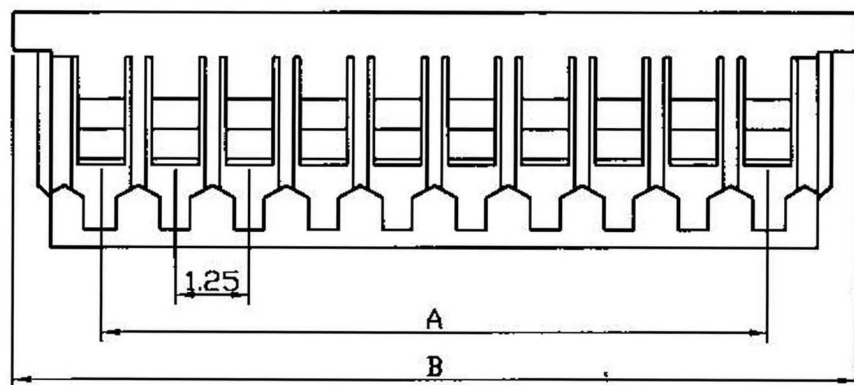
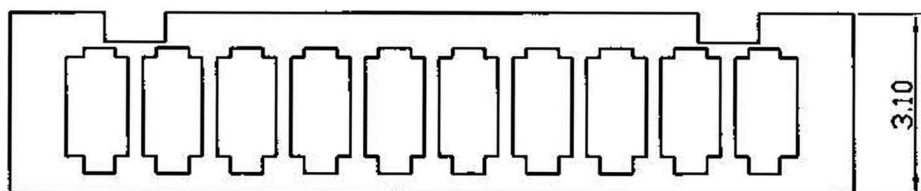


SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC

Voltage Rating: 125V AC/ max.

Operating Temp.: -20°C ~ +85°C

Insulation Resistance: 100mΩ/ min.




Dielectric Withstanding Voltage: 250V AC/ min.

Contact Resistance: 20mΩ/ max.

Material

Material: Nylon66, UL94V-0

Poles	Dimension mm (in.)	
	A	B
2	1.25(0.049)	4.25(0.167)
3	2.50(0.098)	5.50(0.217)
4	3.75(0.148)	6.75(0.266)
5	5.00(0.197)	8.00(0.315)
6	6.25(0.246)	9.25(0.364)
7	7.50(0.295)	10.50(0.413)
8	8.75(0.344)	11.75(0.463)
9	10.00(0.394)	13.00(0.512)
10	11.25(0.443)	14.25(0.561)
11	12.50(0.492)	15.50(0.610)
12	13.75(0.541)	16.75(0.659)
13	15.00(0.591)	18.00(0.709)
14	16.25(0.640)	19.25(0.758)
15	17.50(0.689)	20.50(0.807)

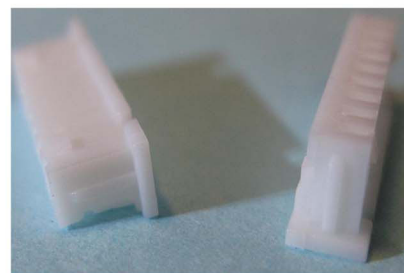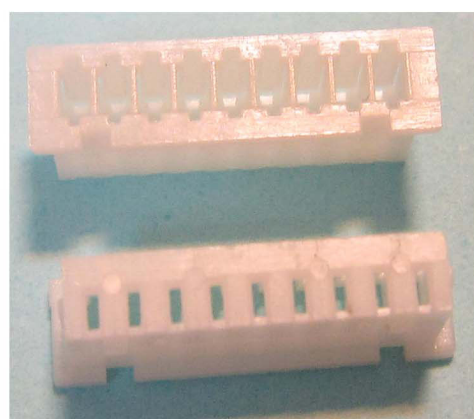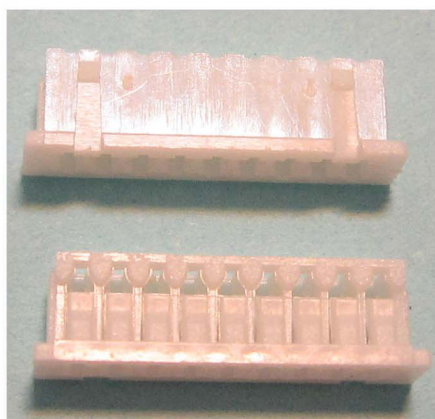


RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准 Angel

DWG.
製圖 Yumi

DATE 制表日
2008/08/20



SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1



TOLERANCE
容許公差

.0 ±0.15
.00 ±0.25
ANG. ±

SIZE
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

1.25mm HOUSING
WHITE COLOR ROHS

PART NO.

料號 MNCH125-xx