

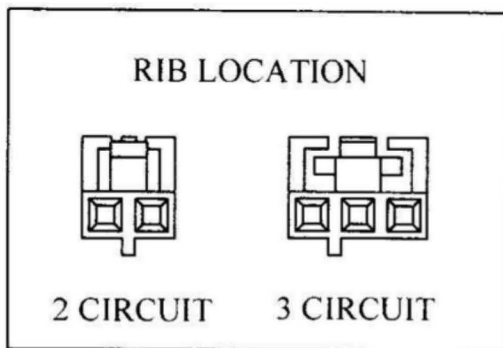
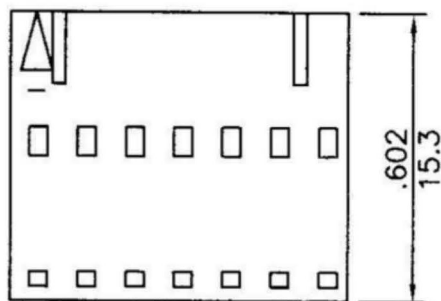


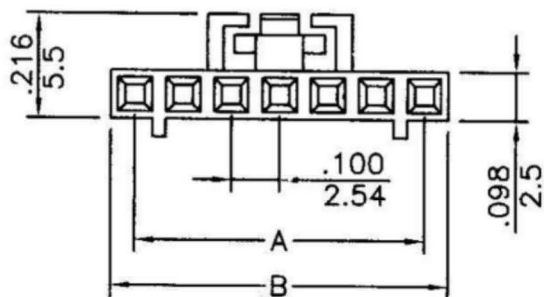

Specifications

- * Poles: 2-18
- * Material: PBT UL94V-0, BLACK
- * Current rating: 2.5A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C ~ +85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 800V AC/minute

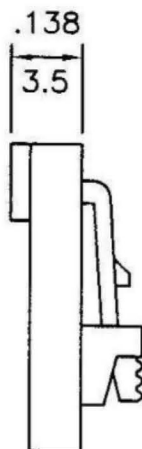

CIRCUITS	DIMENSION in.(mm)	
	A	B
2	0.100(2.54)	0.210(5.35)
3	0.200(5.08)	0.310(7.89)
4	0.300(7.62)	0.410(10.43)
5	0.400(10.16)	0.510(12.97)
6	0.500(12.70)	0.610(15.51)
7	0.600(15.24)	0.710(18.05)
8	0.700(17.78)	0.810(20.59)
9	0.800(20.32)	0.910(23.13)
10	0.900(22.86)	1.010(25.67)
11	1.000(25.40)	1.110(28.21)
12	1.100(27.94)	1.210(30.75)
13	1.200(30.48)	1.310(33.29)
14	1.300(33.02)	1.410(35.83)
15	1.400(35.54)	1.510(38.37)
16	1.500(38.10)	1.610(40.91)
17	1.600(40.64)	1.710(43.45)
18	1.700(43.18)	1.810(45.99)

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPRO.
核准 BETTY
DWG.
製圖 KAREN
DATE 制表日
2014/09/30

SCALE
比例 參考
UNIT
單位 MM
PAGE
張數 1 OF 1

TOLERANCE
容許公差
SIZE
紙張尺寸 A4
REV.
版本 C

PART NAME 品名
2,54 SINGLE ROW FEMALE
HOUSING WITH BUMP&LOCK
PART NO.
料號 MNCHS-xxFBL