

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C






D

E

F

G

H

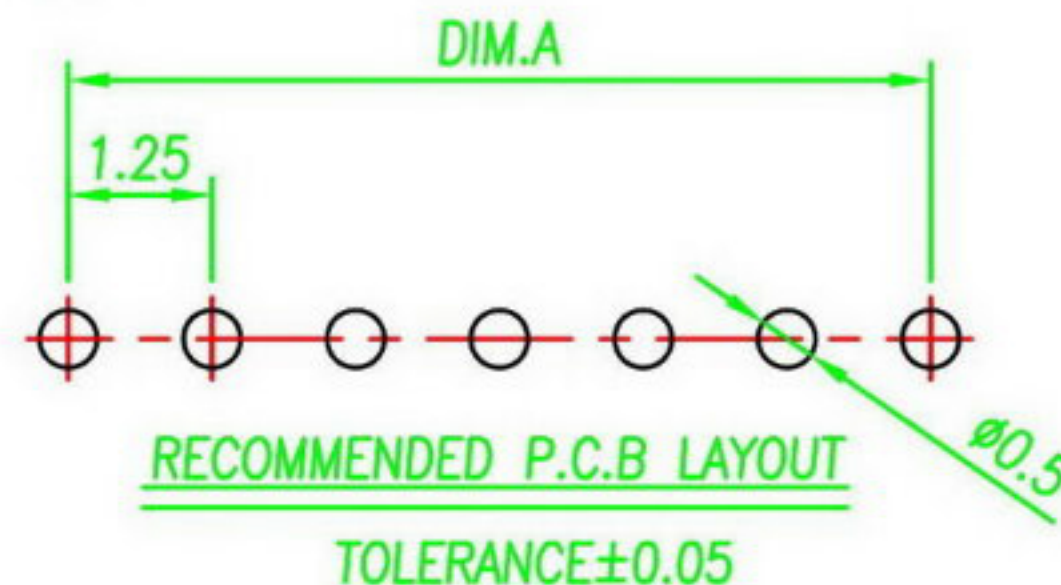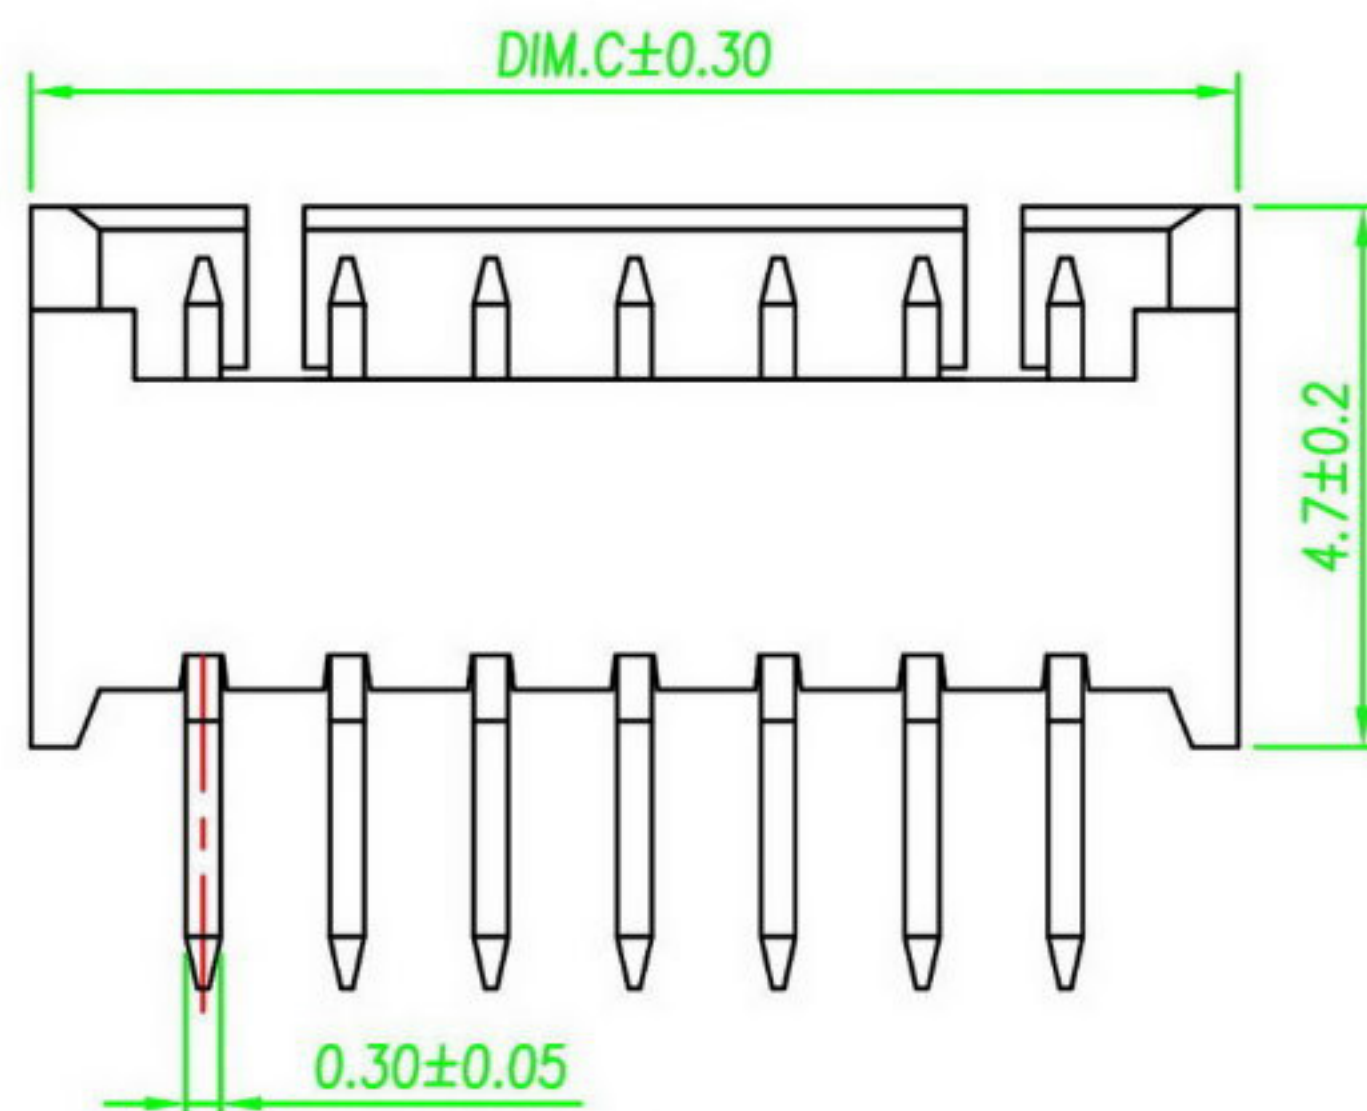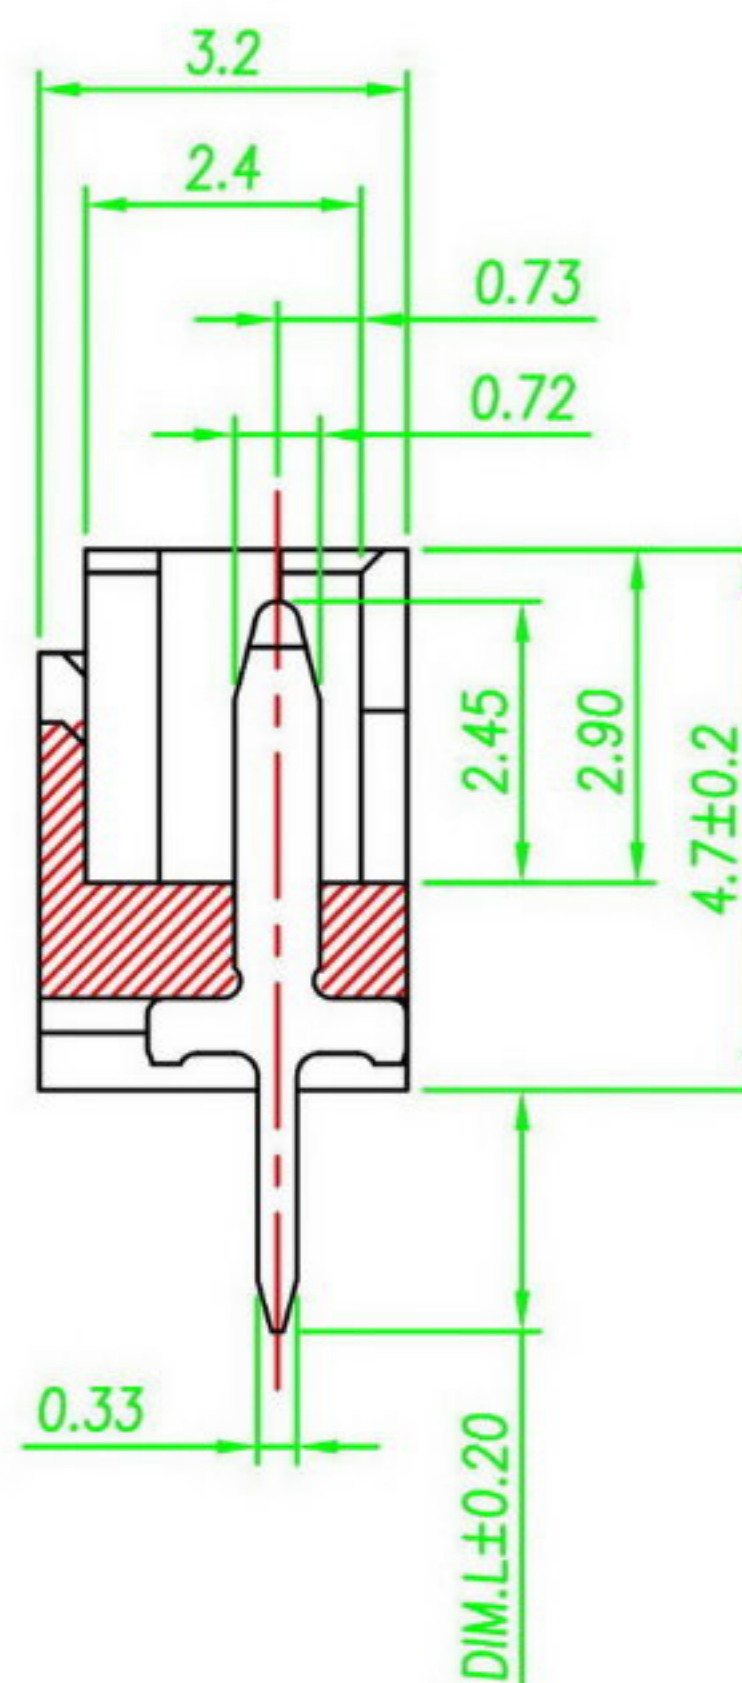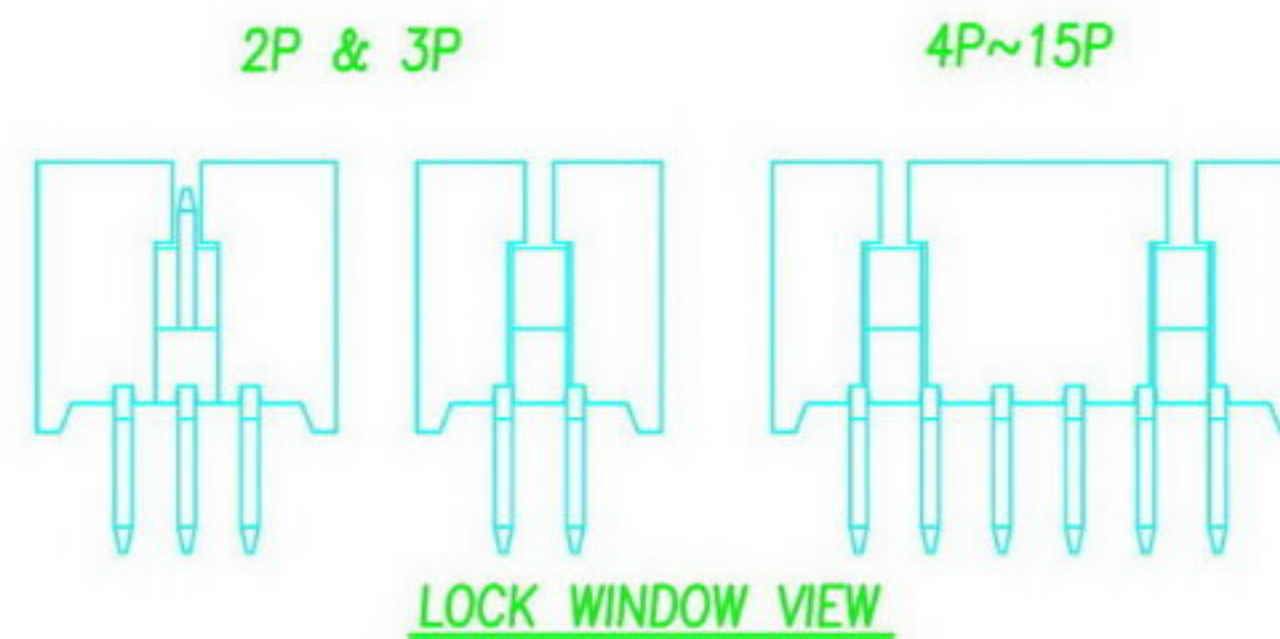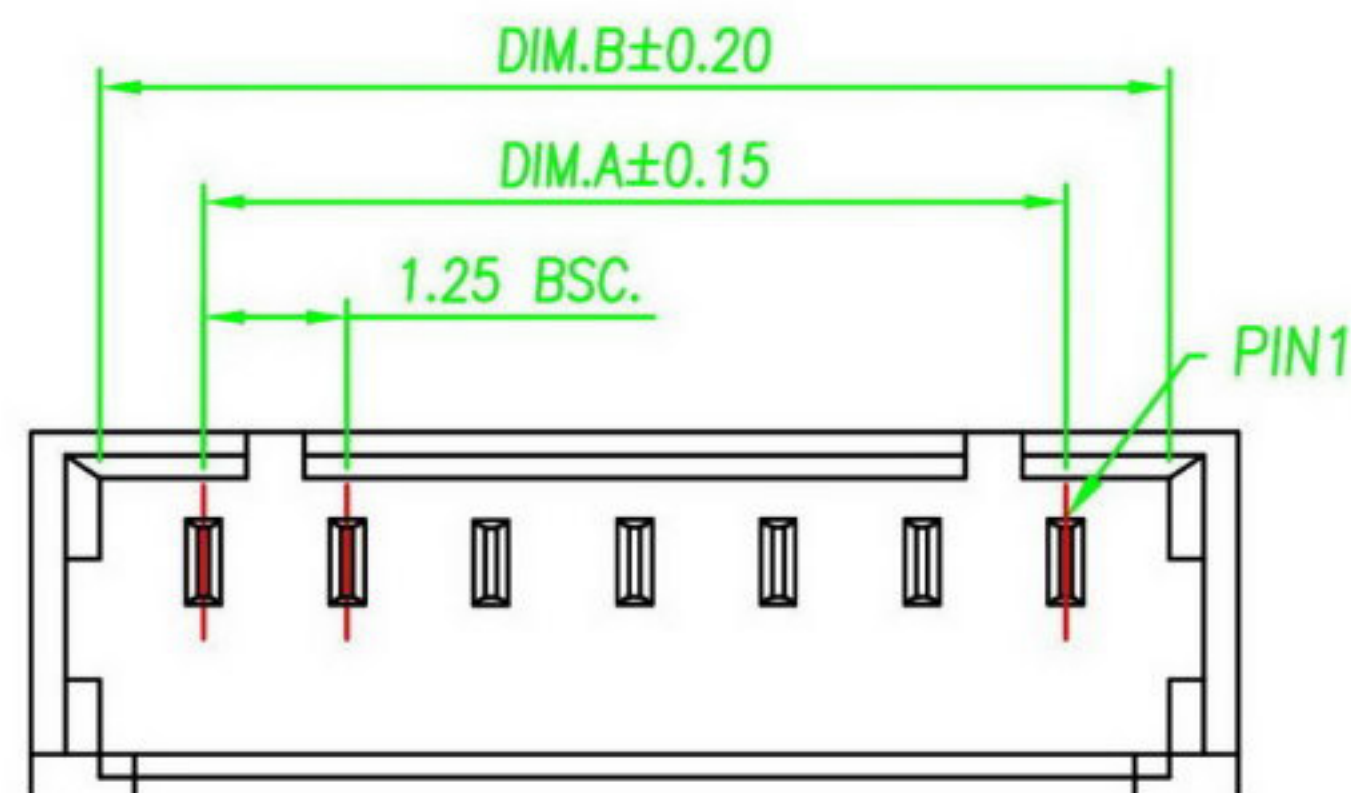

L= 2.1 mm

Specification

- 1.Current Rating:1A
- 2.Voltage Rating:125V AC
- 3.Contact Resistance:20mΩ Max.(Initial) 40mΩ Max.(Final)
- 4.Insulation Resistance:100MΩ Min. At 500V
- 5.Dielectric Withstanding Voltage:AC 250V/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

- 1.Housing:High Temperature thermoplastic UL94V-0
- 2.Contact Pin:Copper Alloy t=0.30mm

Finish:

- 1.Housing:NY46 UL94V-0 Nature
- 2.Contact Pin:Tin Plated Over Nickel.

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
02	1.25	3.05	4.25	09	10.00	11.80	13.00
03	2.50	4.30	5.50	10	11.25	13.05	14.25
04	3.75	5.55	6.75	11	12.50	14.30	15.50
05	5.00	6.80	8.00	12	13.75	15.55	16.75
06	6.25	8.05	9.25	13	15.00	16.80	18.00
07	7.50	9.30	10.50	14	16.25	18.05	19.25
08	8.75	10.55	11.75	15	17.50	19.30	20.50


RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准 HELEN

DWG.
製圖 ABBY

DATE 制表日
2016/12/12



SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 / 1

TOLERANCE
容許公差
X.XX ± 0.15
X.X ± 0.25

SIZE.
紙張尺寸 A 4

REV.
版次 B

PART NAME 品名

STRAIGHT 1.25mm WAFER

PART NO.

料號

MNCW125-xxS

1 2 3 4 5 6 7 8