

1

2

3

4

5

6

7

8




A

A

(4P~18P)

(3P)

(2P)



NOTES

- * Poles:2-18
- * Material:Insulator:PBT UL94V-0 BLACK
- * Contact:0.64mm(.025") square pin,brass,gold plated

Specifications





- * Current rating: 2.5A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 600 AC/minute
- * Applicable PC board thickness: .063" (1.6mm)
- * Endure under max. 240°C 5SECS.

MNCWS254-xxS

MNCWS254-xxR

C

C



D





D

E

E

F

F




G

G

H

H

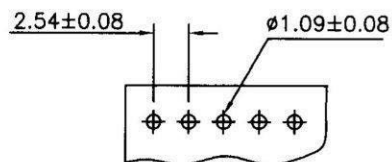


P.C. Board Layout

CIRCUITS	DIMENSION mm	
	A	B
2	2.54	7.62
3	5.08	10.16
4	7.62	12.70
5	10.16	15.24
6	12.70	17.78
7	15.24	20.32
8	17.78	22.86
9	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72
18	43.18	48.26

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
標準 BETTYDWG.
製圖 KARENDATE 制表日
2012/06/26SCALE
比例 參考UNIT
單位 MMPAGE
張數 1 OF 1TOLERANCE
X. ±0.5
X.X ±0.25
X.XX ±0.2
X.XXX ±0.08SIZE
線規尺寸 A4REV.
版次 A

PART NAME 品名

SINGLE ROW WAFER 2,54mm

PART NO.

料號 MNCWS254-xxx

1

2

3

4

5

6

7

8