

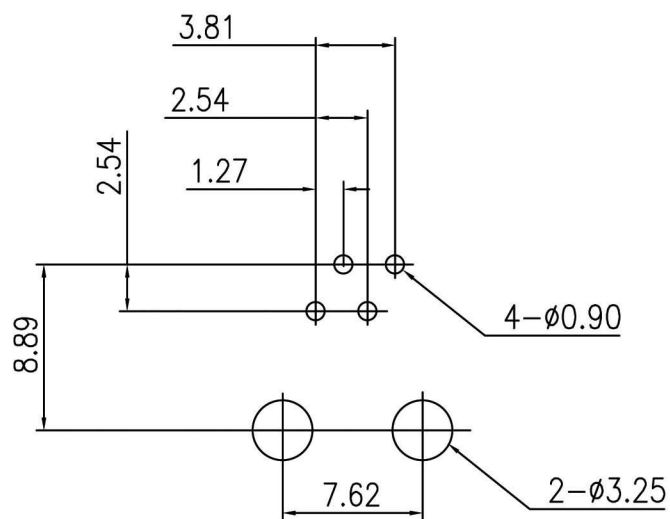
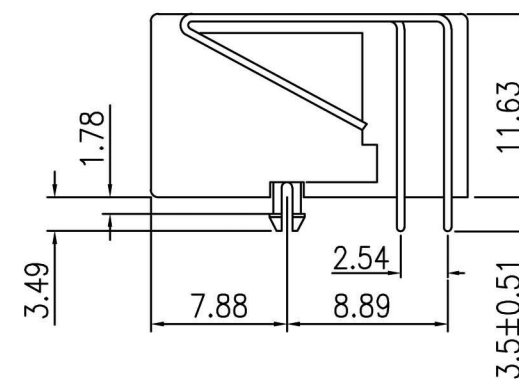
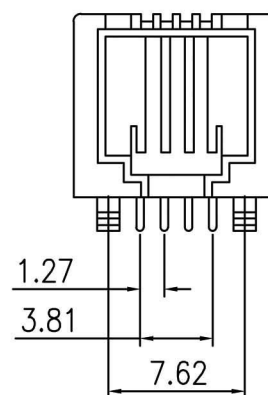


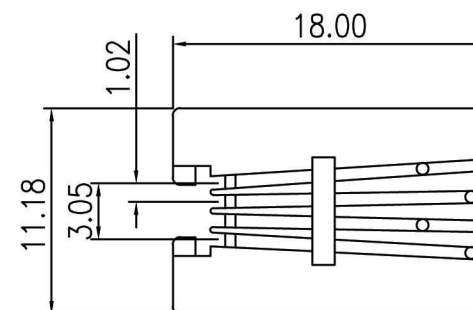

PCB Layout



Materials

Housing: Glass Filled Polyester UL94V-0, Black

Contact: 0.45mm Diameter Phosphor Bronze Gold Plating Over Nickel

ELECTRICAL:

1. Current Rating : 1.5 AMP
2. Voltage Rating : 150 VAC
3. Contact Resistance : 20 Milliohms MAX
4. Insulation Resistance : 500 Milliohms MIN
5. Dielectric Withstanding Voltage : 500 VAC, 1min

RoHS Compliant		T&T Connection System Co., Ltd.	
APPD. 核准 Hedy		TOLERANCE 容許公差 .0 ± 0.2MM ANG. ±	PART NAME 品名 SIDE ENTRY L/P PCB JACK 4P4C GOLD PLATING BLACK COLOR
DWG. 製圖 Helen	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 MOD44LP-1-SE
DATE 制表日 2018/5/9	PAGE 張數 1 / 1	REV. 版次 C	