
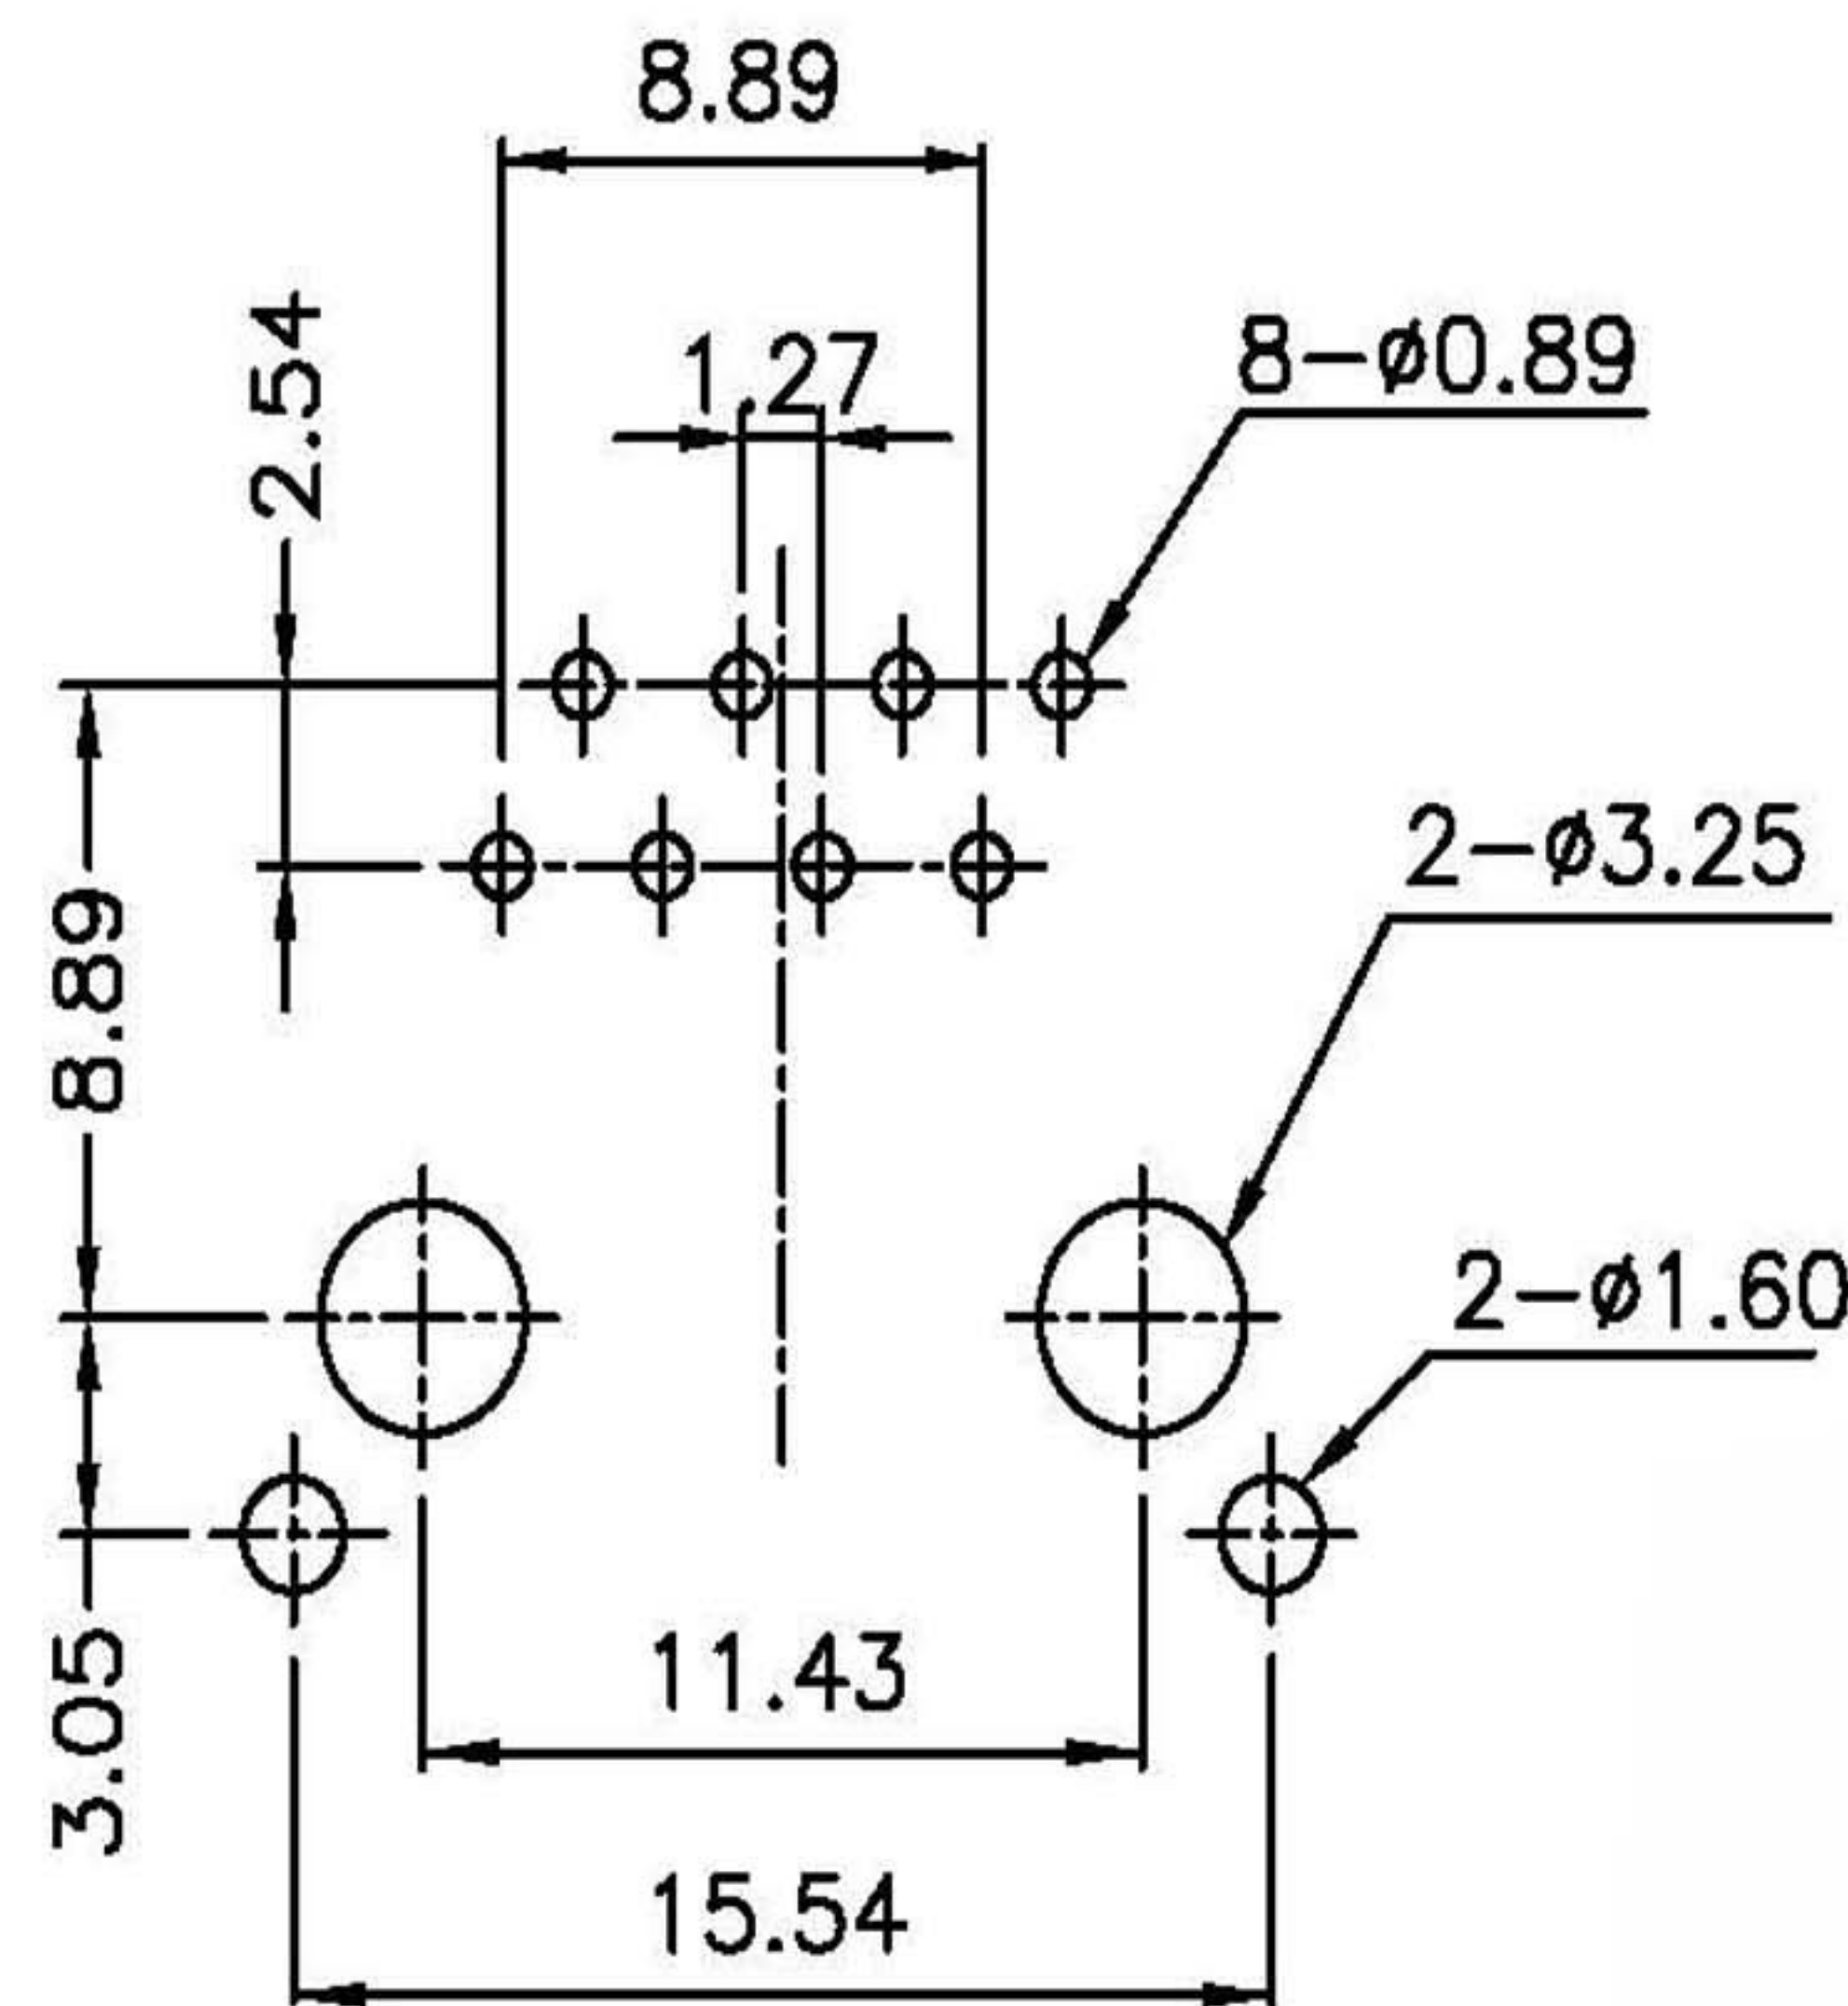
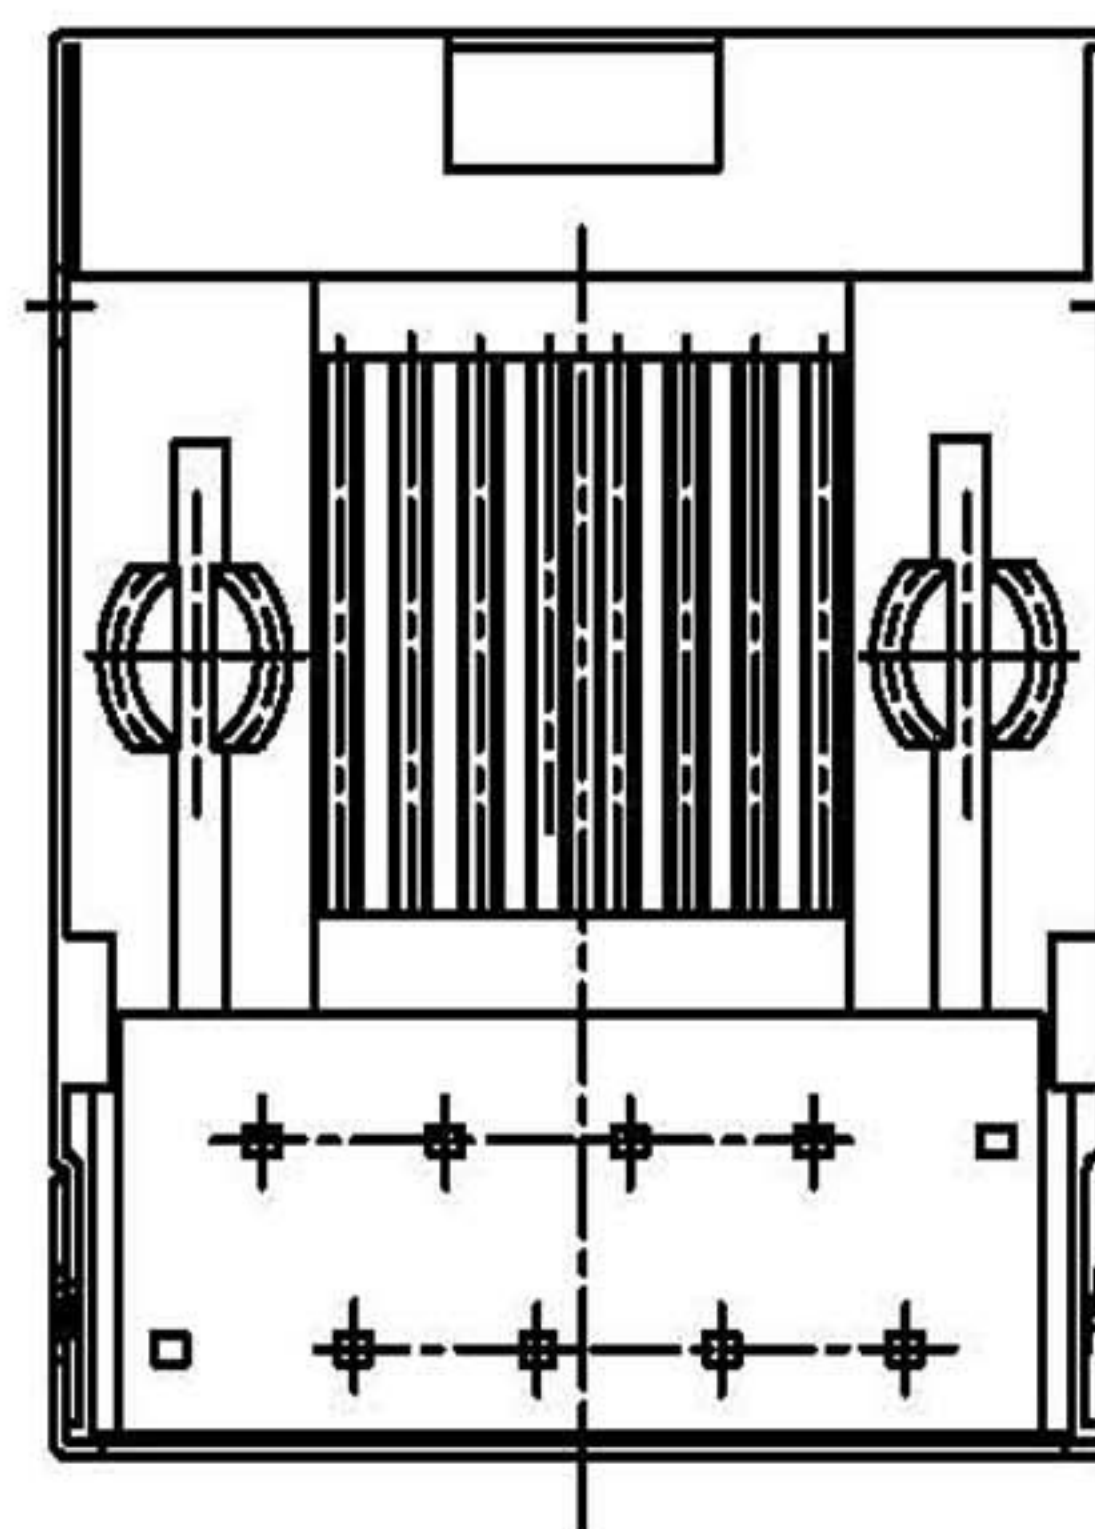
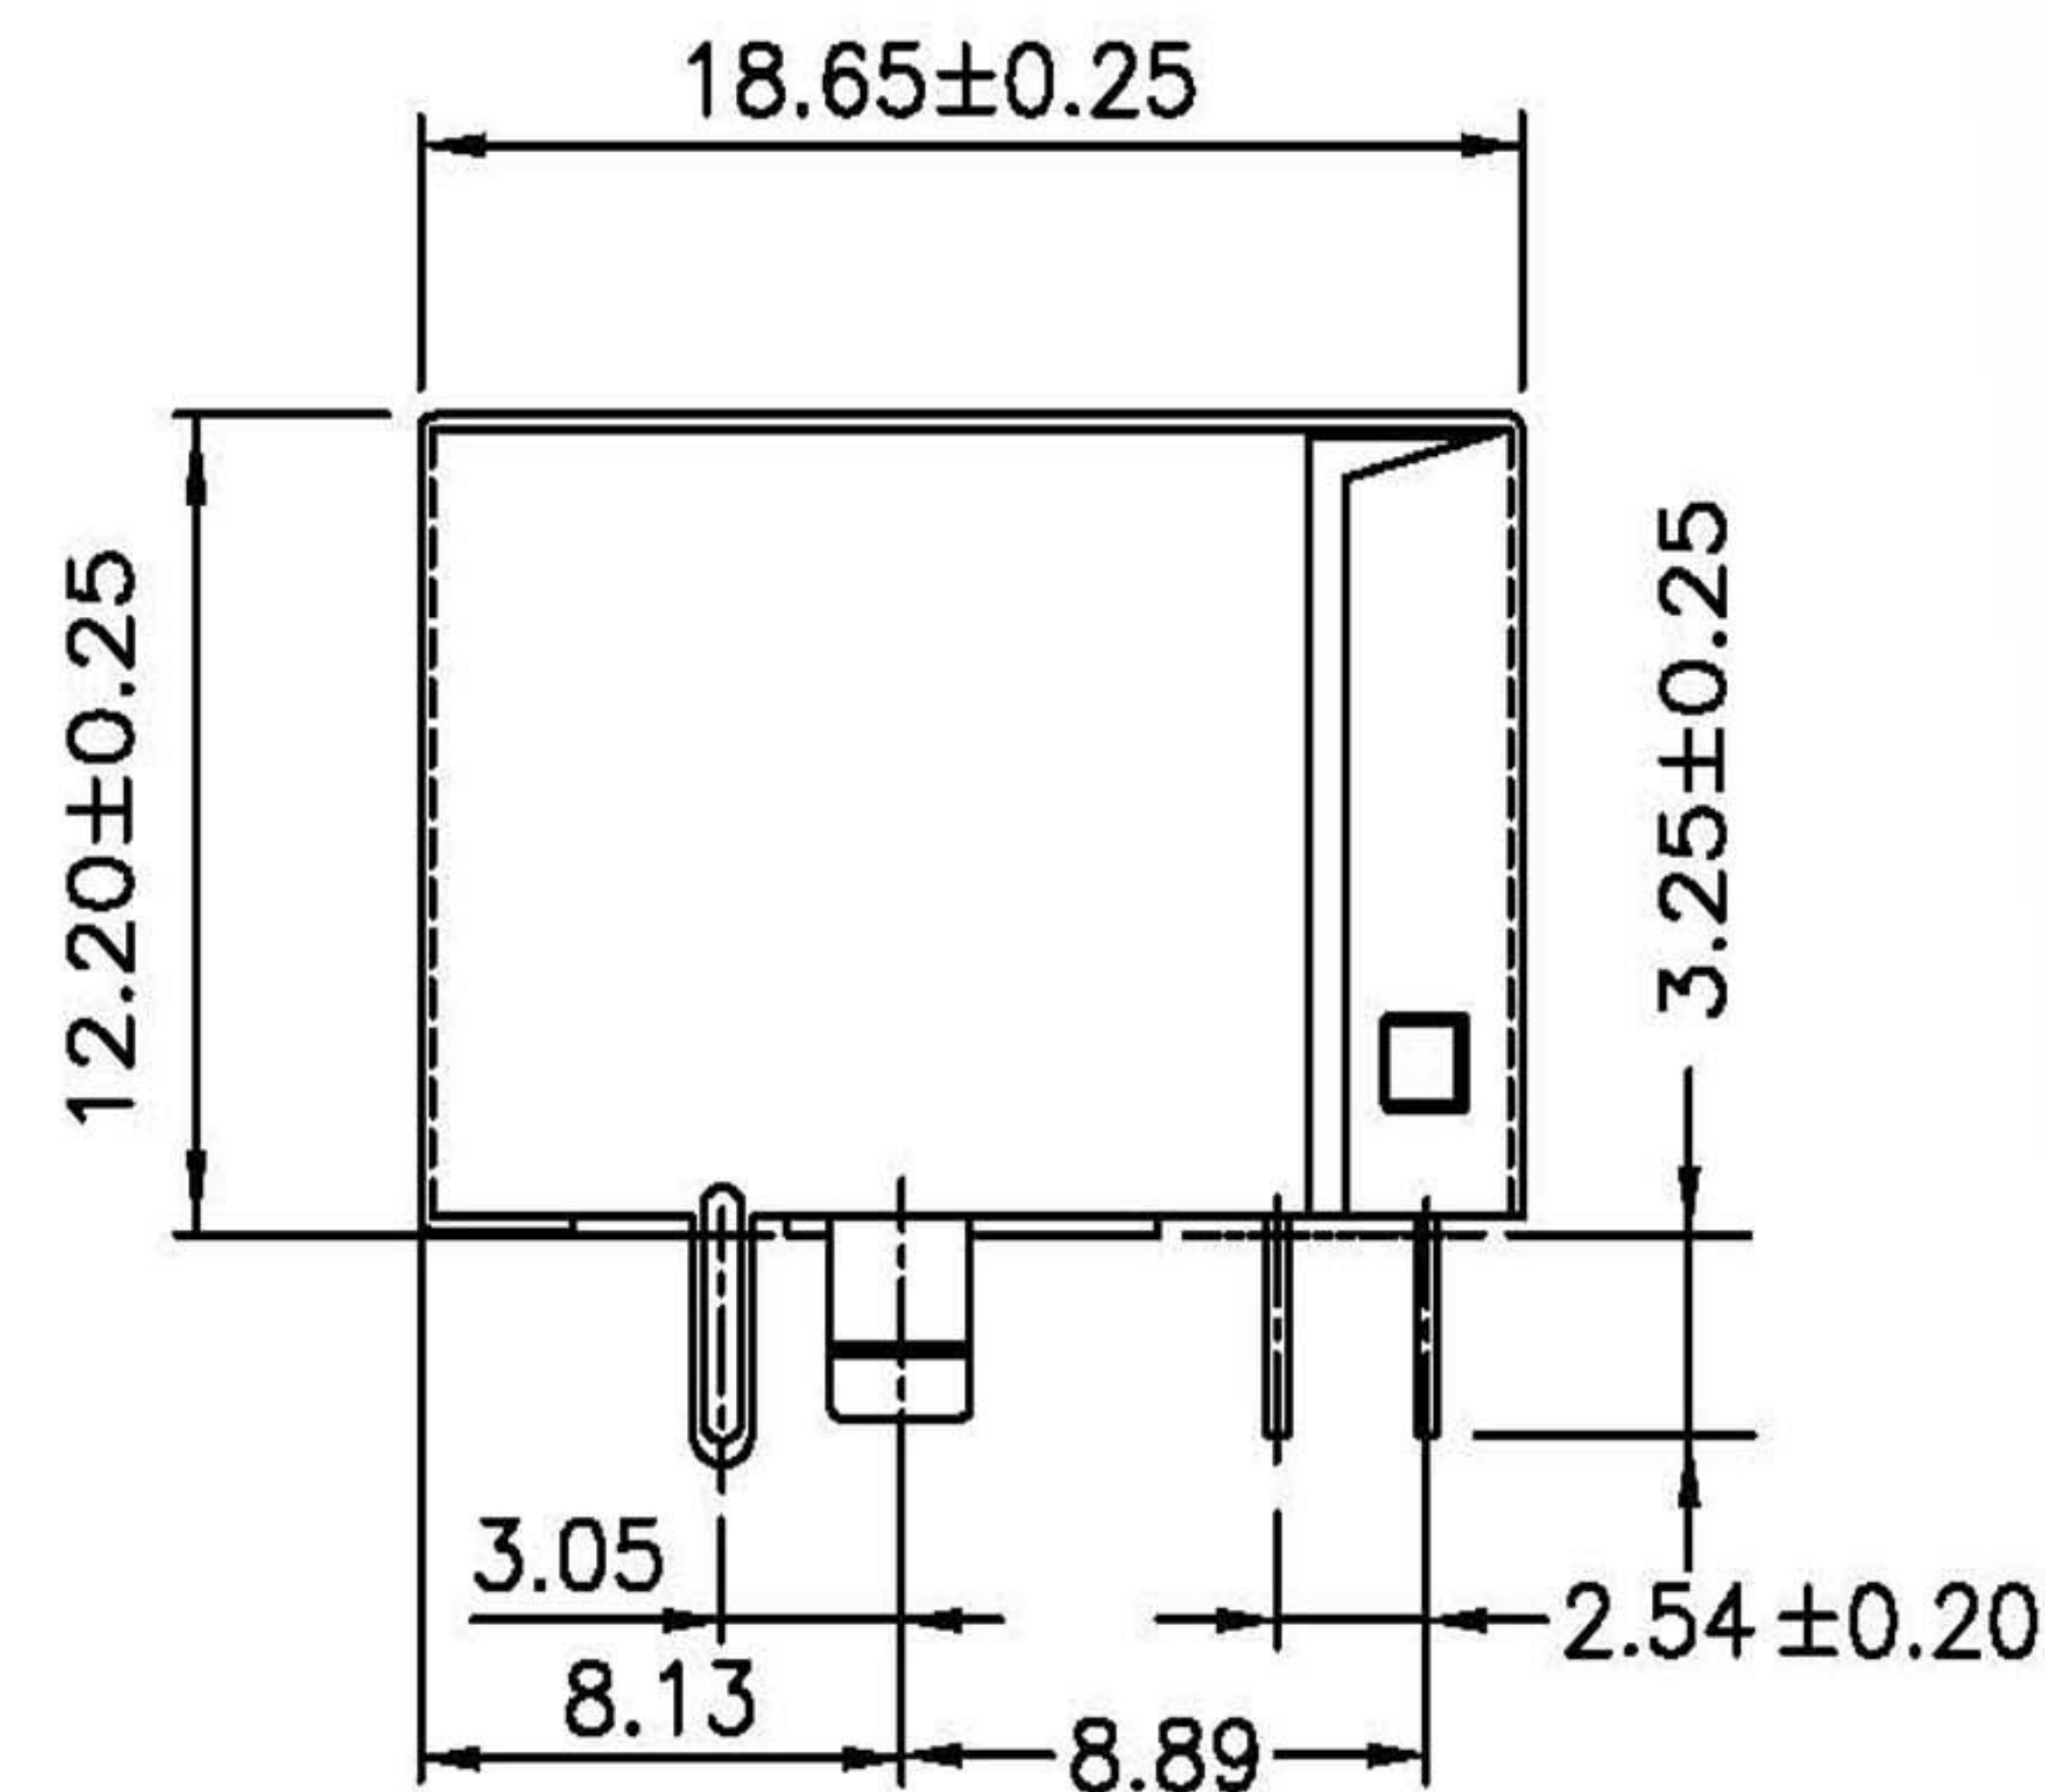


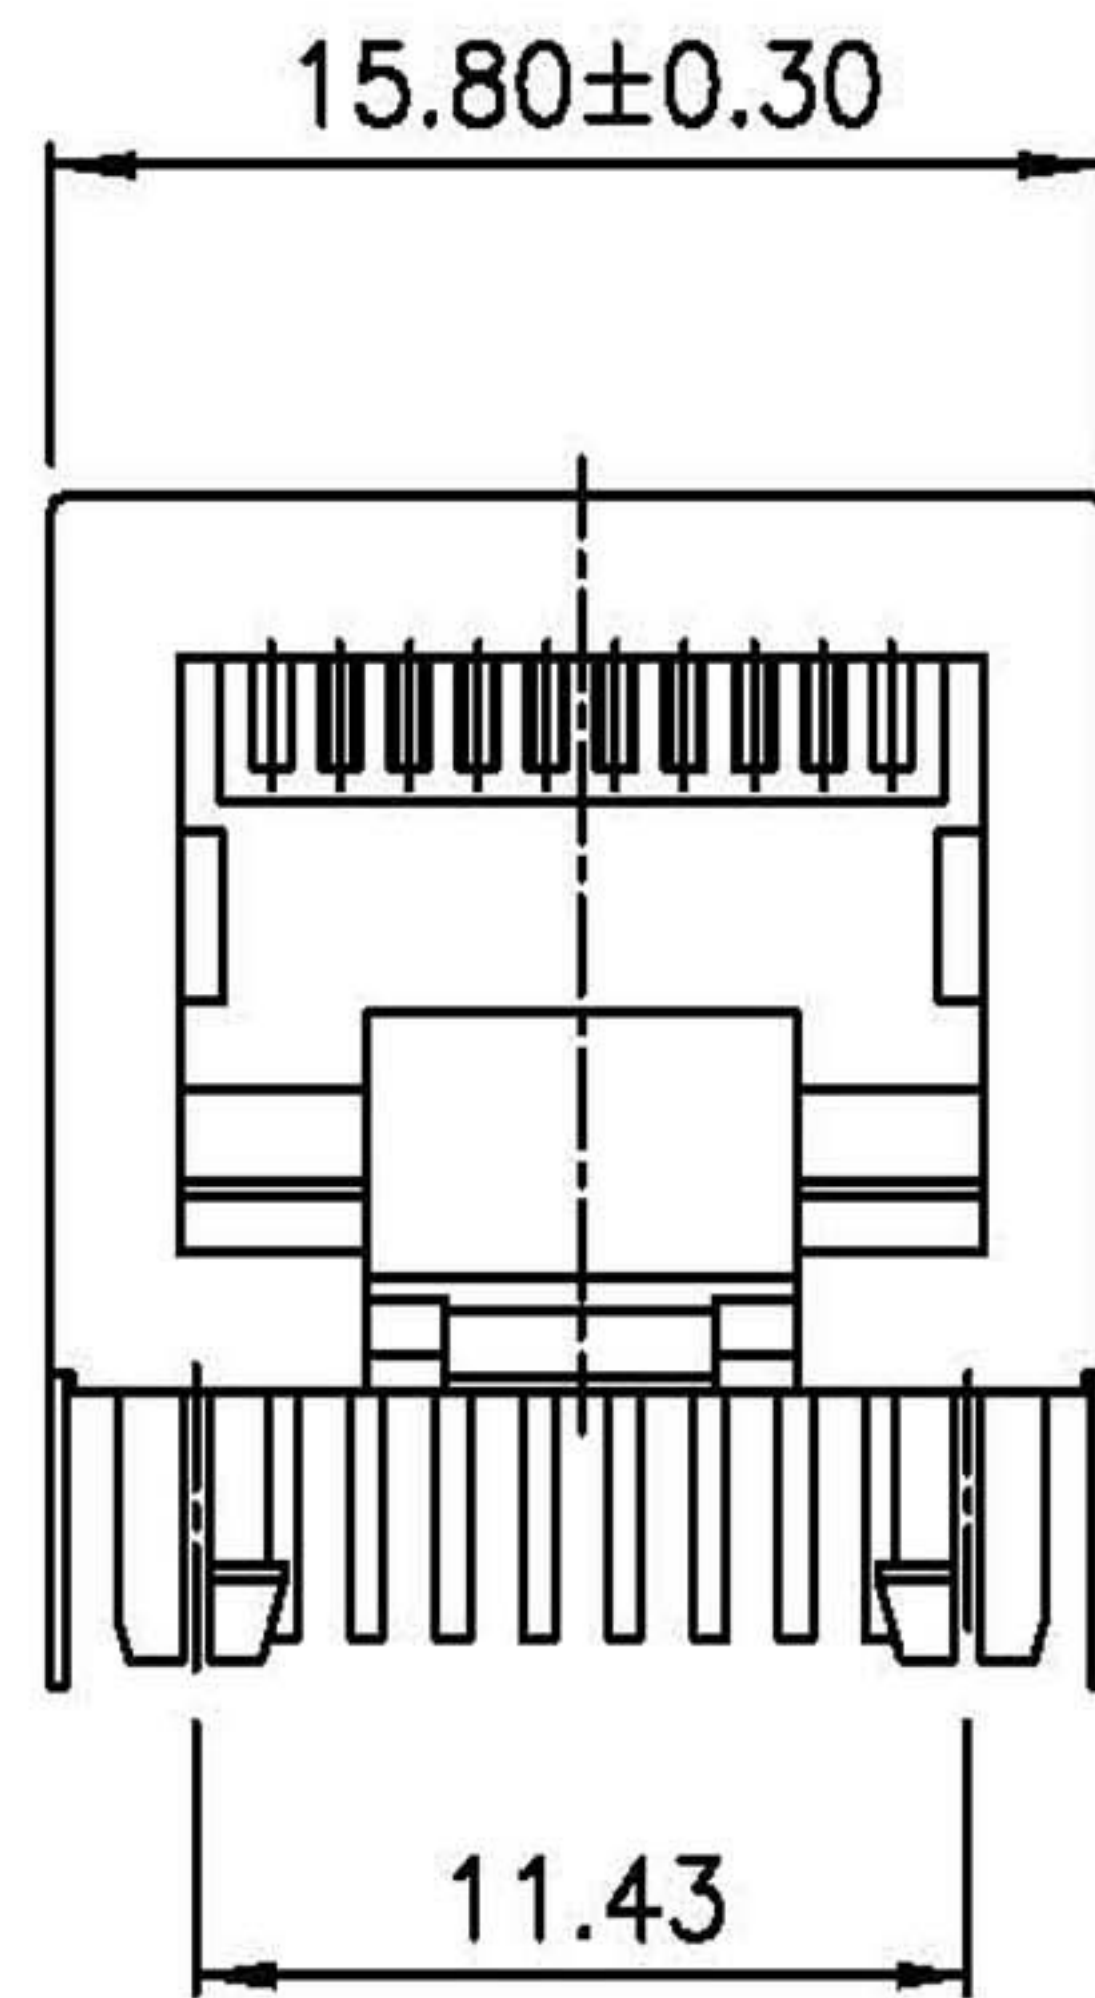

PC BOARD LAYOUT

MATERIAL AND FINISH

Housing: Standard Material Glass Filled Polyester UL 94V-0
Standard Color Black.

Contact: 0.45mm Thickness Phosphor Bronze,
Shielded: 0.25mm Thickness Copper Alloy With Tin/Nickel
Plated.

ELECTRICAL:

1. Current Rating : 1.5 AMP
2. Voltage Rating : 150 VAC
3. Contact Resistance : 20 Milliohms MAX
4. Insulation Resistance : 500 Milliohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准 BETTY

DWG.
製圖 BETTY

DATE 制表日
2008/12/02

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

容許公差 TOLERANCE
.000 ±0.13 ANG±3°
.00 ±0.25
.0 ±0.38

SIZE.
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

8/8 PCB JACK, SIDE ENTRY
SHIELDED, LOW PROFILE

PART NO.

料號 MOD88LPSH-1-SE