

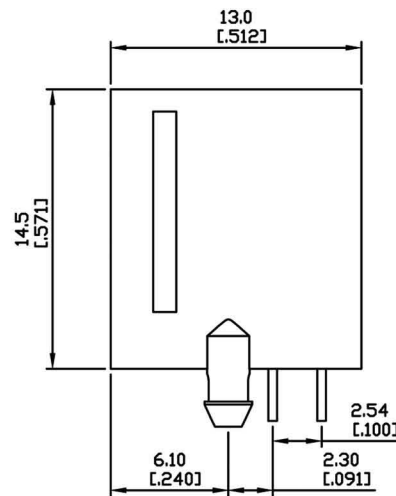
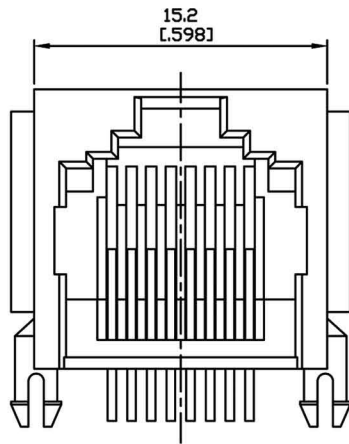


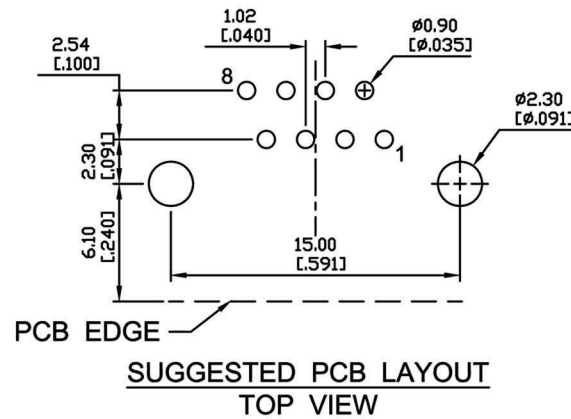

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel

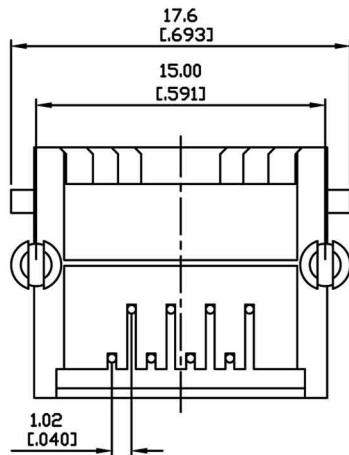

**RoHS
Compliant**

T&T Connection System Co., Ltd.

APPD.
核准



TOLERANCE
容許公差

PART NAME 品名

DWG.
製圖

Hedy

SCALE
比例 參考

0.000 mm ± 0.075 mm
0.00 mm ± 0.15 mm
0.0 mm ± 0.25 mm

SIDE ENTRY MINI L/P P.C.B JACK
8P8C GOLD FLASH WITH PANEL
STOP SPLIT FOOT GREY INSULATOR
ROHS LOW-LEAD

DATE 制表日

2010/07/16

PAGE
張數

1 / 1

REV.
版次

A

PART NO.

料號

MOD88M-1-SE