

* The specification subject to change without notice." "The drawing is for reference only.

MTE2



Rating

3A 125V AC
1.5A 250V AC

Contact resistant

50mΩ Max


Insulation resistant

DC 500V 100MΩ Min


Dielectric strength

AC 1000V 1 minute

Cut out

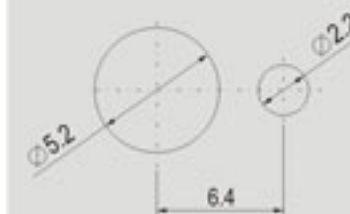

2 mm max

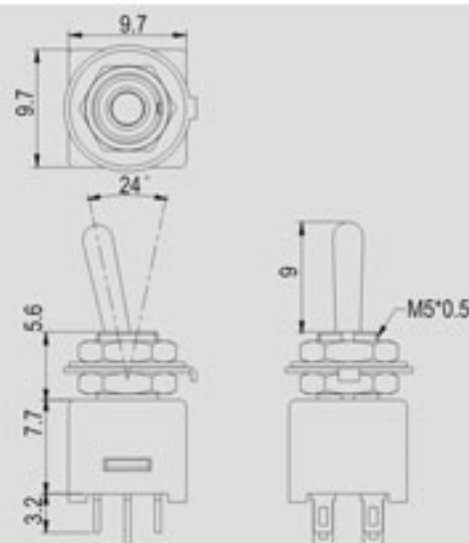


FEATURES

- * MATERIAL: Metal lever are nickel plated brass. Frame and base are PBT (UL flame: 94V-0).
- * Terminals are silver plated brass.

MTE2 A

FUNCTION

0 2

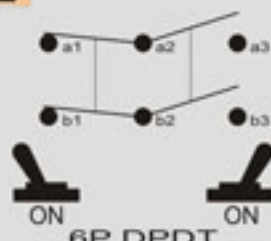

6P DPDT

TERMINAL

1 SO



MTE2602A1