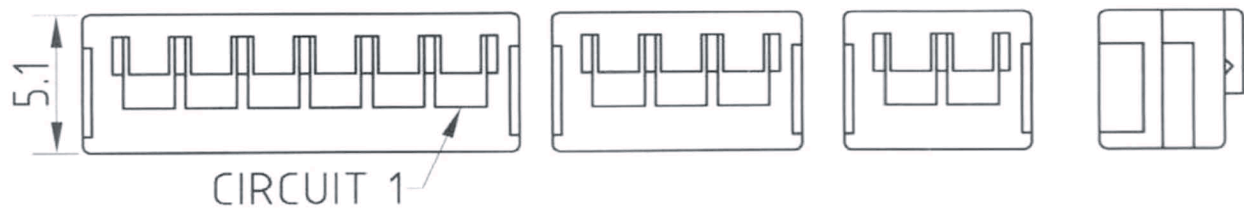
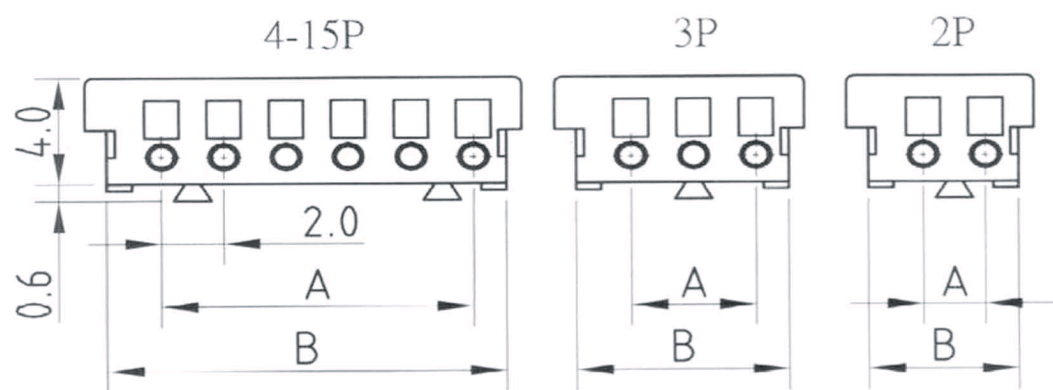


1	2	3	4	5	6	7	8																																																	
A	5.1  CIRCUIT 1 <td colspan="3"> SPECIFICATION: PITCH BETWEEN POLES :2.0mm CURRENT RATING : 2A VOLTAGE RATING : 100V CONTACT RESISTANCE : INITIAL VALUE/10mΩ max. AFTER ENVIRONMENTAL TESTING/20mΩ max. INSULATION RESISTANCE :1000 MΩ(min.) WITHSTAND VOLTAGE :800V AC/MINUTE TEMPERATURE RANGE : -25℃ TO +85℃ APPLICABLE WIRE: AWG #22TO #26 FEATURES: AVAILABLE NUMBER OF CIRCUITS 2 TO 15 MATERIAL : NYLON 66 UL94V-0 </td> <td>A</td>					SPECIFICATION: PITCH BETWEEN POLES :2.0mm CURRENT RATING : 2A VOLTAGE RATING : 100V CONTACT RESISTANCE : INITIAL VALUE/10mΩ max. AFTER ENVIRONMENTAL TESTING/20mΩ max. INSULATION RESISTANCE :1000 MΩ(min.) WITHSTAND VOLTAGE :800V AC/MINUTE TEMPERATURE RANGE : -25℃ TO +85℃ APPLICABLE WIRE: AWG #22TO #26 FEATURES: AVAILABLE NUMBER OF CIRCUITS 2 TO 15 MATERIAL : NYLON 66 UL94V-0			A																																															
B									B																																															
C	4-15P 3P 2P 4.0  2.0 A B <td colspan="3"> Dimensional and Order information <table><tr><th rowspan="2">Poles</th><th colspan="2">DIM:(mm)</th></tr><tr><th>A</th><th>B</th></tr><tr><td>2</td><td>2.00</td><td>4.80</td></tr><tr><td>3</td><td>4.00</td><td>6.80</td></tr><tr><td>4</td><td>6.00</td><td>8.80</td></tr><tr><td>5</td><td>8.00</td><td>10.80</td></tr><tr><td>6</td><td>10.00</td><td>12.80</td></tr><tr><td>7</td><td>12.00</td><td>14.80</td></tr><tr><td>8</td><td>14.00</td><td>16.80</td></tr><tr><td>9</td><td>16.00</td><td>18.80</td></tr><tr><td>10</td><td>18.00</td><td>20.80</td></tr><tr><td>11</td><td>20.00</td><td>22.80</td></tr><tr><td>12</td><td>22.00</td><td>24.80</td></tr><tr><td>13</td><td>24.00</td><td>26.80</td></tr><tr><td>14</td><td>26.00</td><td>28.80</td></tr><tr><td>15</td><td>28.00</td><td>30.80</td></tr></table></td> <td>C</td>					Dimensional and Order information <table><tr><th rowspan="2">Poles</th><th colspan="2">DIM:(mm)</th></tr><tr><th>A</th><th>B</th></tr><tr><td>2</td><td>2.00</td><td>4.80</td></tr><tr><td>3</td><td>4.00</td><td>6.80</td></tr><tr><td>4</td><td>6.00</td><td>8.80</td></tr><tr><td>5</td><td>8.00</td><td>10.80</td></tr><tr><td>6</td><td>10.00</td><td>12.80</td></tr><tr><td>7</td><td>12.00</td><td>14.80</td></tr><tr><td>8</td><td>14.00</td><td>16.80</td></tr><tr><td>9</td><td>16.00</td><td>18.80</td></tr><tr><td>10</td><td>18.00</td><td>20.80</td></tr><tr><td>11</td><td>20.00</td><td>22.80</td></tr><tr><td>12</td><td>22.00</td><td>24.80</td></tr><tr><td>13</td><td>24.00</td><td>26.80</td></tr><tr><td>14</td><td>26.00</td><td>28.80</td></tr><tr><td>15</td><td>28.00</td><td>30.80</td></tr></table>			Poles	DIM:(mm)		A	B	2	2.00	4.80	3	4.00	6.80	4	6.00	8.80	5	8.00	10.80	6	10.00	12.80	7	12.00	14.80	8	14.00	16.80	9	16.00	18.80	10	18.00	20.80	11	20.00	22.80	12	22.00	24.80	13	24.00	26.80	14	26.00	28.80	15	28.00	30.80	C
Poles	DIM:(mm)																																																							
	A	B																																																						
2	2.00	4.80																																																						
3	4.00	6.80																																																						
4	6.00	8.80																																																						
5	8.00	10.80																																																						
6	10.00	12.80																																																						
7	12.00	14.80																																																						
8	14.00	16.80																																																						
9	16.00	18.80																																																						
10	18.00	20.80																																																						
11	20.00	22.80																																																						
12	22.00	24.80																																																						
13	24.00	26.80																																																						
14	26.00	28.80																																																						
15	28.00	30.80																																																						
D									D																																															
E									E																																															
F									F																																															
G									G																																															
H	RoHS Compliant APPD. 核准 BETTY DWG. 製圖 BETTY DATE 制表日 2008/06/13  SCALE 比例 UNIT 單位 PAGE 張數 1 OF 1 TOLERANCE 容許公差 .0 ±0.25 .00 ±0.13 ANG. ± SIZE. 紙張尺寸 A 4 REV. 版次 A <td colspan="3"> Gold Star Connectors Co., Ltd. PART NAME 品名 HOUSING 2mm (CRIMP TERMINAL) PART NO. 料號 NCH200-xx </td> <td>H</td>					Gold Star Connectors Co., Ltd. PART NAME 品名 HOUSING 2mm (CRIMP TERMINAL) PART NO. 料號 NCH200-xx			H																																															
1	2	3	4	5	6	7	8																																																	