

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C




D

E

F

G

H

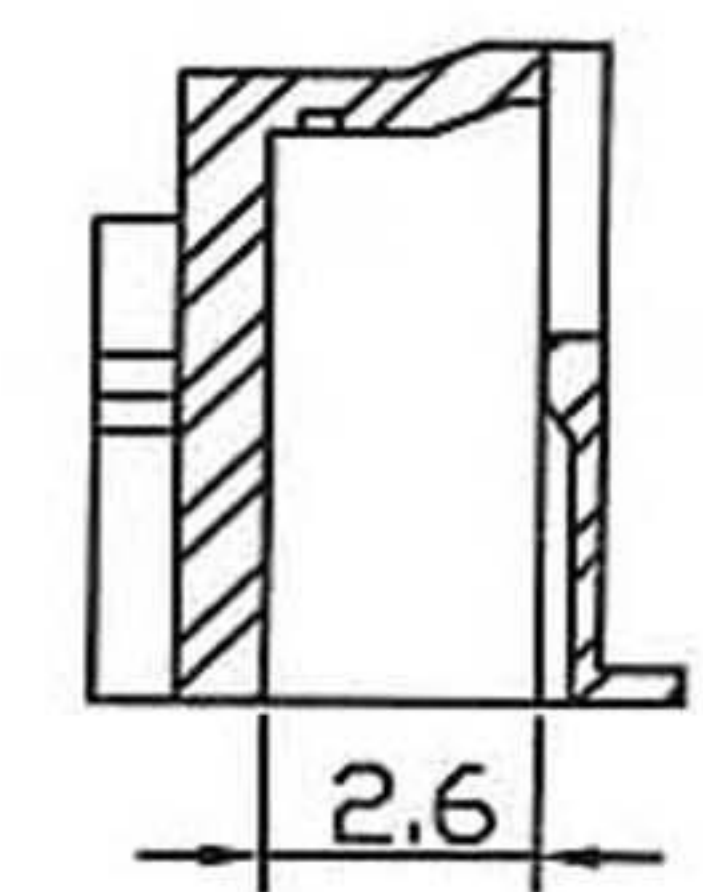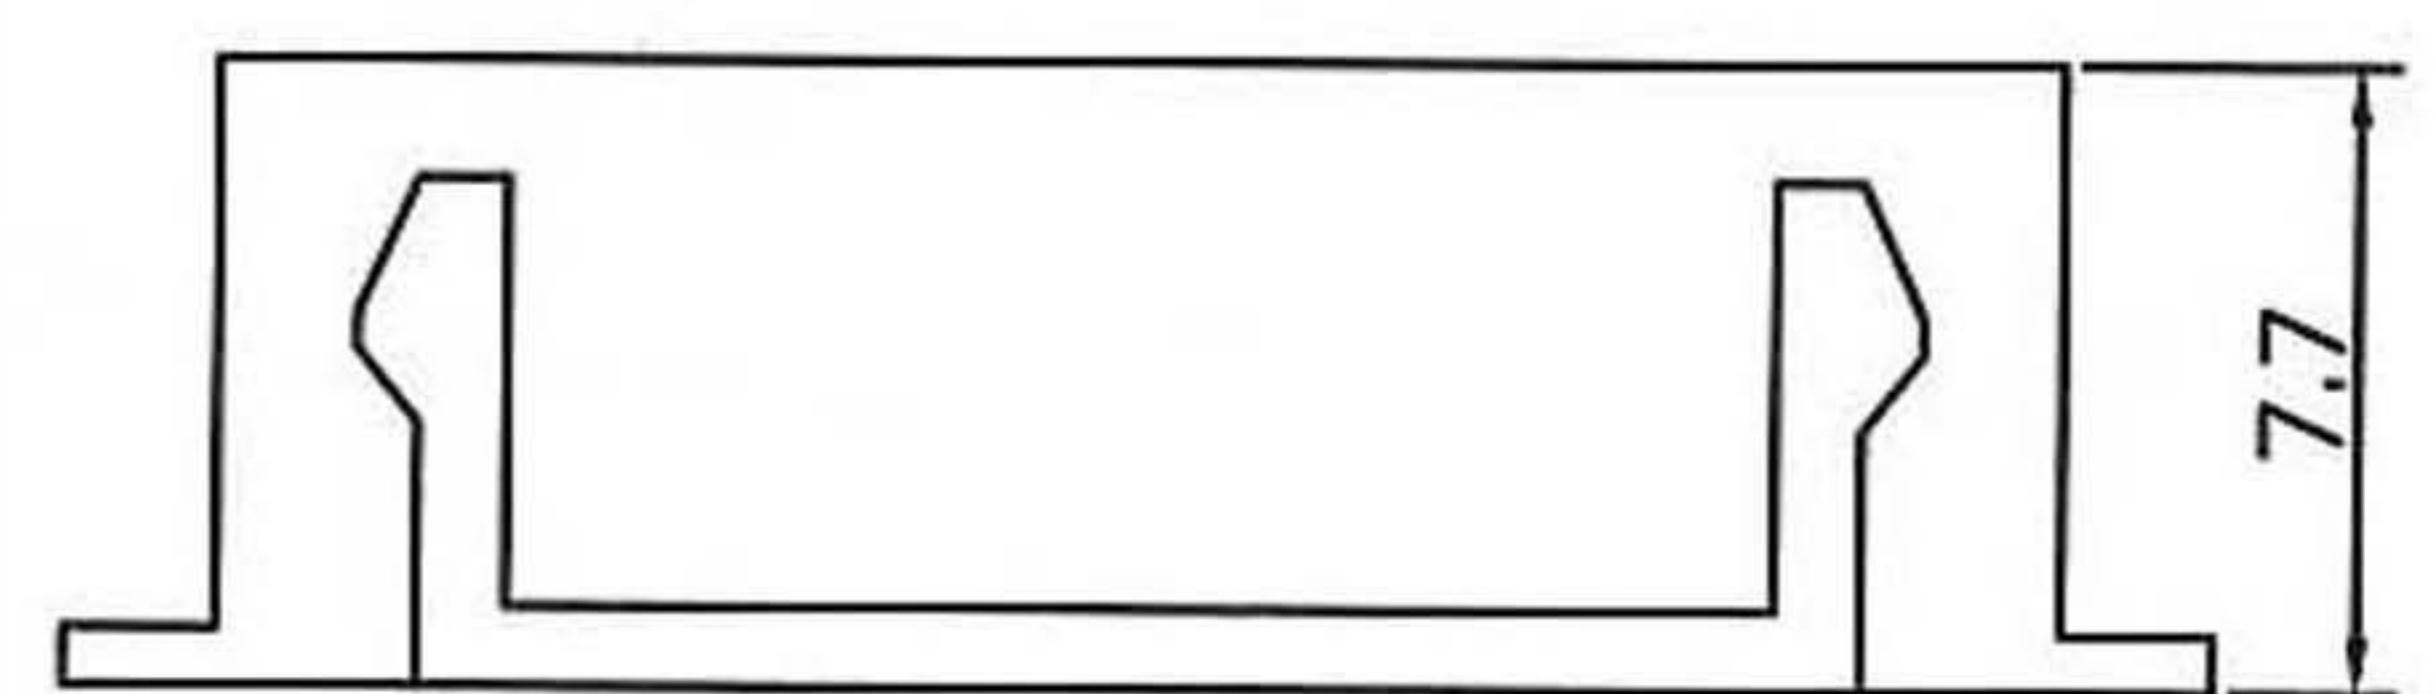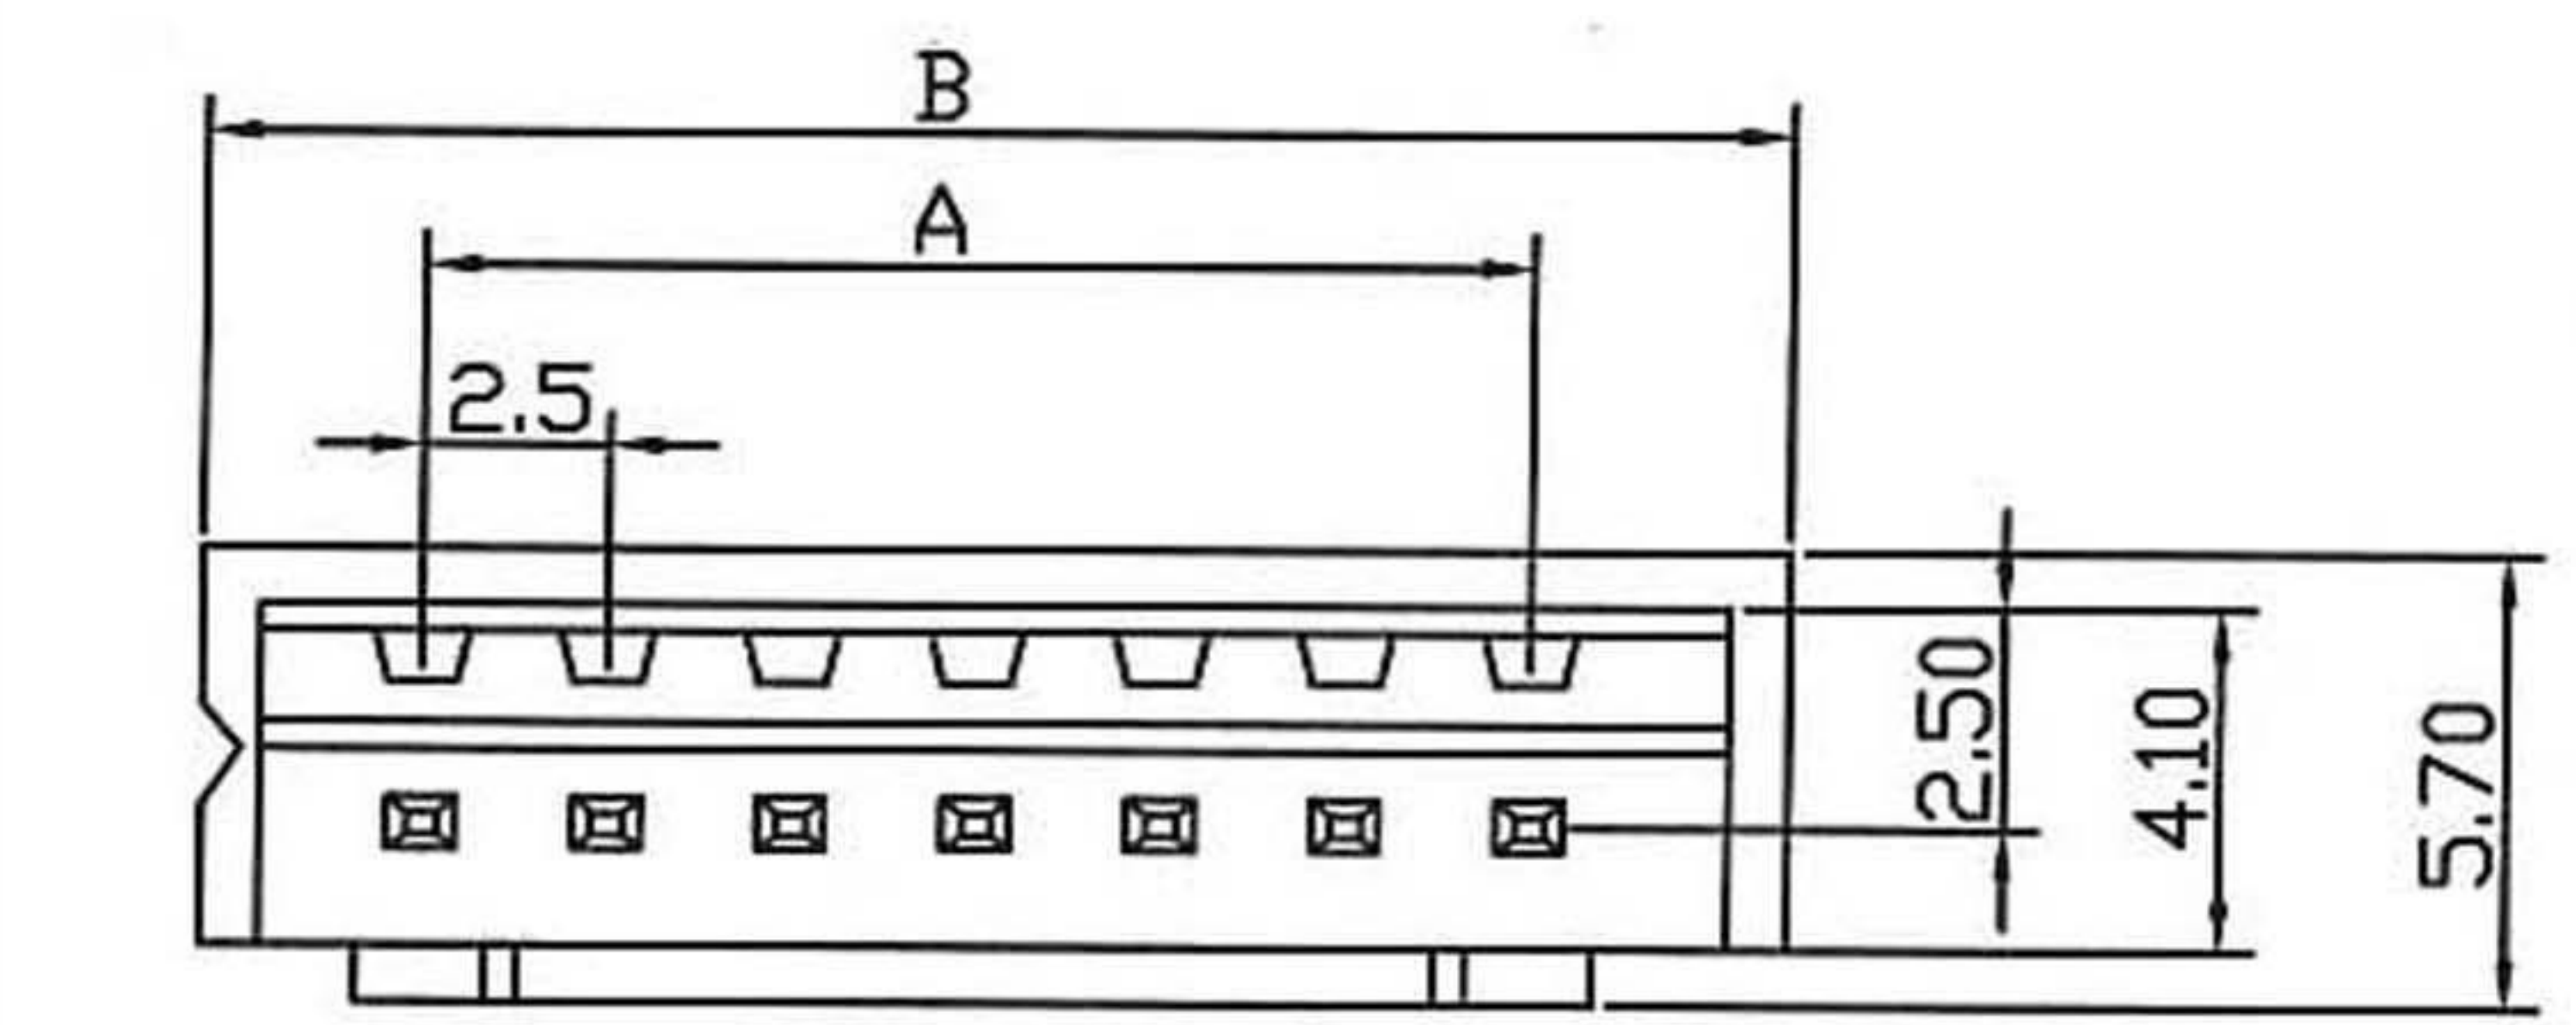

SPECIFICATION

Electric
Current Rating: 2A AC, DC
Voltage Rating: 250V AC, DC
Temperature Range: -25° C ~+85° C
Contact Resistance: 20m ohms max.
Insulation Resistance: 1,000M ohms Min.
Withstanding Voltage: 1,000V AC/minute.
Material: Nylon 66, UL94V-0

POLES	A	B
02	2.50	7.30
03	5.00	9.80
04	7.50	12.30
05	10.00	14.80
06	12.50	17.30
07	15.00	19.80
08	17.50	22.30
09	20.00	24.80
10	22.50	27.30
11	25.00	29.80
12	27.50	32.30
13	30.00	34.80
14	32.50	37.30
15	35.00	39.80
16	37.50	42.30
17	40.00	44.80
18	42.50	47.30
19	45.00	49.80
20	47.50	52.30

RoHS
Compliant

Gold Star Connections Co., Ltd.

APPD. 核准 Angel		TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 2,5mm Crimp House
DWG. 製圖 Yumi		SCALE 比例 參考	
DATE 制表日 2007/10/29	UNIT 單位 MM	PAGE 張數 1 OF 1	REV. 版次 A
PART NO. 料號 NCH250-xx			

1 2 3 4 5 6 7 8