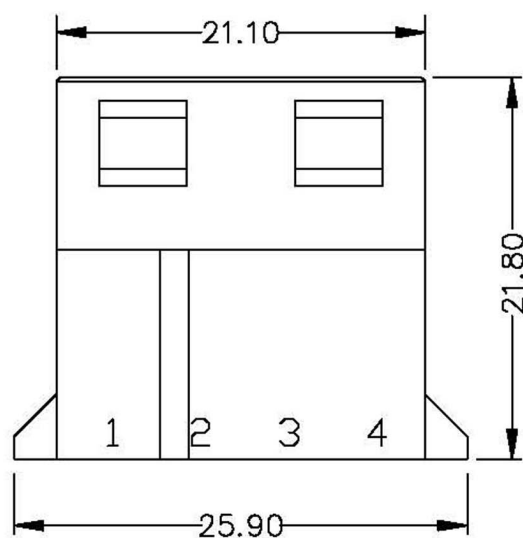
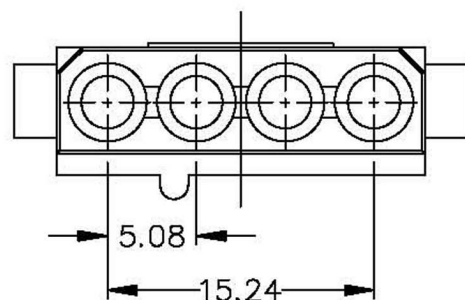


## SPECIFICATIONS

Current rating : 5.0A AC,DC

Voltage rating : 250V AC,DC

Temperature range : -25°C to +85 °C

Contact resistance : 10mΩ Max.

Insulation resistance : 1000MΩ Min.

Withstanding voltage : 1500V AC/minute

Material : Nylon 66, UL94V-2

RoHS  
Compliant

*Gold Star Connections Co., Ltd.*

APPD.  
核准 Angel

DWG.  
製圖 Yumi

DATE 制表日  
2008/09/03



SCALE  
比例 參考

UNIT  
單位 M M

PAGE  
張數 1 OF 1

TOLERANCE  
容許公差

.0 ±  
.00 ±  
ANG. ±

SIZE  
紙張尺寸 A 4

REV.  
版次 A

PART NAME 品名

4 PIN FEMALE HOUSE  
5,08 WHITE

PART NO.

料號 NCH508-04F