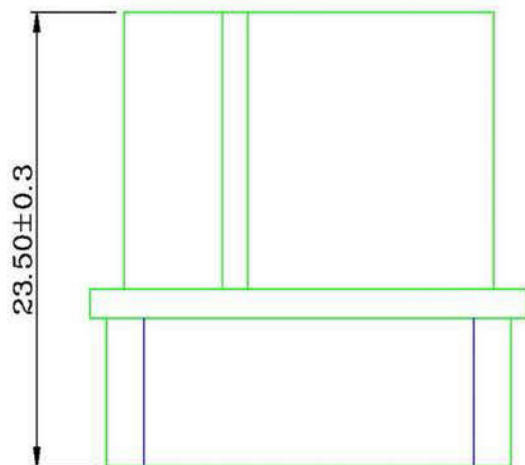
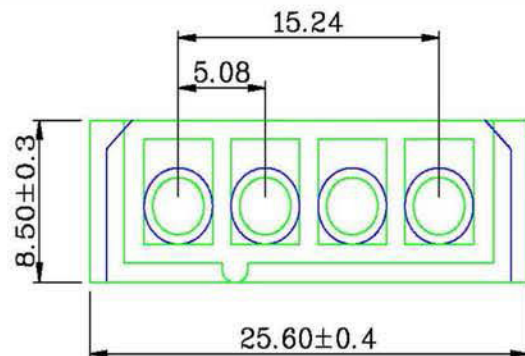


Specifications:

- .Poles: 4 Poles
- .Pitch Between Poles: 5.08mm
- .Current Rating: 10A
- .Voltage Rating: 250V AC,DC
- .Temperature Range: -25°C~+85°C
- .Contact Resistance: Initial value/10mΩ max
After environmental testing/20mΩ
- .Withstand Voltage: 1500V AC/minute
- .Insulation Resistance: 1000 MΩ/min
- .Material: Nylon UL94V-2

RoHS
Compliant

Gold Star Connections Co., Ltd.

APPD.
核准 Angel

DWG.
製圖 Yumi

DATE 制表日
2010/02/23

SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

TOLERANCE
1-10: ±0.2
10-20: ±0.3
20-40: ±0.4
40 UP: ±0.5

SIZE
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

4 PIN FEMALE HOUSE

5,08 WHITE

PART NO.

料號 NCH508-04M