

Features:

- 2 ~ 12 circuits available
- Material: UL 94V-0 nylon
- Standard color: Black
- Accepts T4030 series terminals

Specifications:


- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Amps	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000m Ω Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.
(carry rated current load)

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C	Dim. D
2	3.0 $\pm$ 0.08	6.85	7.21	10.9
3	6.0 $\pm$ 0.10	9.85	10.21	13.9
4	9.0 $\pm$ 0.10	12.85	13.21	16.9
5	12.0 $\pm$ 0.10	15.85	16.21	19.9
Circuits	Dim. A	Dim. B	Dim. C	Dim. D
6	15.0 $\pm$ 0.15	18.85	19.21	22.9
7	18.0 $\pm$ 0.15	21.85	22.21	25.9
8	21.0 $\pm$ 0.15	24.85	25.21	28.9
9	24.0 $\pm$ 0.15	27.85	28.21	31.9
Circuits	Dim. A	Dim. B	Dim. C	Dim. D
10	27.0 $\pm$ 0.20	30.85	31.21	34.9
11	30.0 $\pm$ 0.20	33.85	34.21	37.9
12	33.0 $\pm$ 0.20	36.85	37.21	40.9

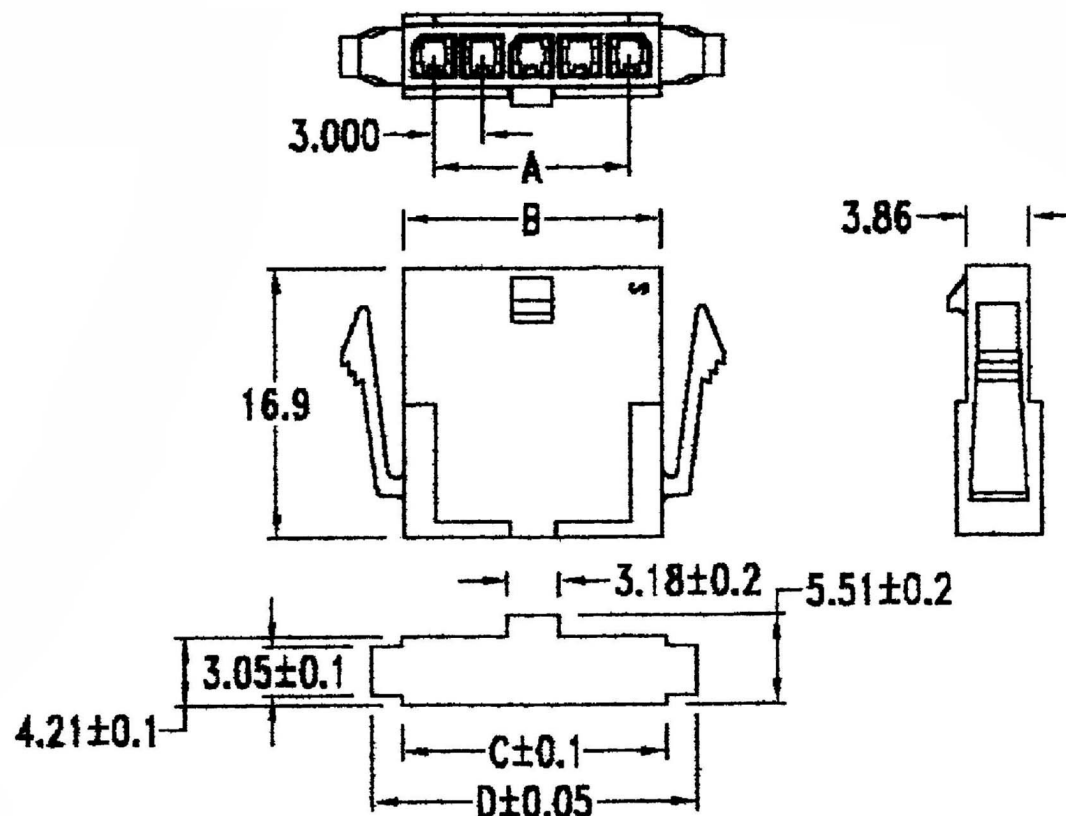

PANEL OPENING [Recommended panel thickness: .062" (1.57mm)]

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准 Angel

DWG.
製圖 Yumi

DATE 制表日
2009/07/02

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

UNLESS OTHERWISE
SPECIFIED TOLERANCE
.000 $\pm$ 0.08 (mm)
.00 $\pm$ 0.25 (mm)
.0 $\pm$ 0.4 (mm)

SIZE
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

Female house 3.00mm single row

PART NO.

料號 NCHS300-xxF