

Features:

- Available in 2 thru 12 circuits
- Material: UL 94V-0 nylon
- Standard color: Black
- Accepts T4130 series terminals

Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A





- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000m Ω min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.

(carry rated current load)

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	3.0	7.0	4	9.0	13.0	6	15.0	19.0
3	6.0	10.0	5	12.0	16.0	7	18.0	22.0

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
8	21.0	25.0	10	27.0	31.0	12	33.0	37.0
9	24.0	28.0	11	30.0	34.0			

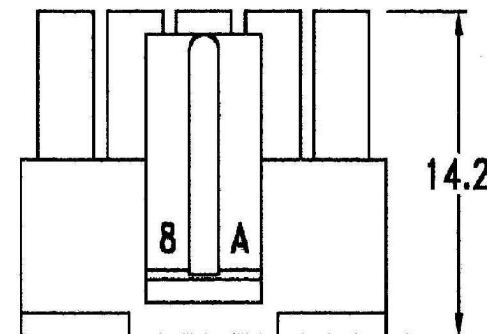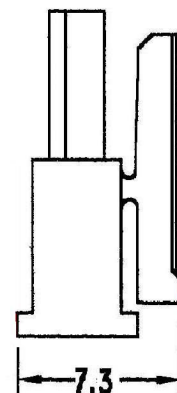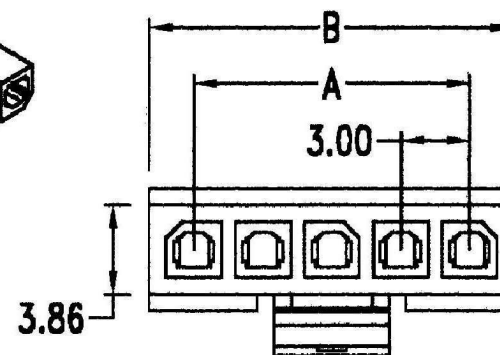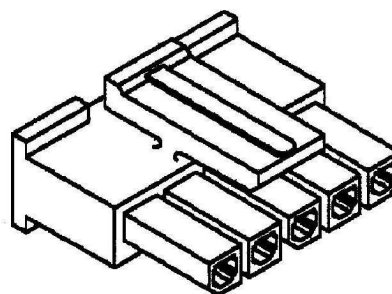

RoHS
Compliant

APPD.
核准 Angel

DWG.
製圖 Yumi

DATE 制表日
2009/07/02

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

UNLESS OTHERWISE
SPECIFIED TOLERANCE
.000 $\pm$ 0.08 (mm)
.00 $\pm$ 0.25 (mm)
.0 $\pm$ 0.4 (mm)

SIZE
紙張尺寸 A 4
REV.
版次 A

Gold Star Connectors Co., Ltd.

PART NAME 品名

Male house 3.00mm single row

PART NO.

料號 NCHS300-xxM