

Features:

- 2 ~ 12 circuits available

Specification:

- Current rating and wire size:


Wire Size AWG	Circuits			
	2, 3	4 ~ 6	7 ~ 10	11, 12
# 16	9 A	8 A	7 A	6 A
# 18	9 A	8 A	7 A	6 A
# 20	7 A	6 A	5 A	5 A
# 22	5 A	4 A	4 A	4 A
# 24	4 A	3 A	3 A	3 A
# 26	3 A	2 A	2 A	2 A
# 28	2 A	1 A	1 A	1 A

- Voltage rating: 600V (R.M.S.)
- Insulation resistance: DC 500V 1000M Ω min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(including temperature rise)

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C
N	4.2 x (N - 1)	4.2 x N + 1.2	4.2 x N + 6.6

&& N = 2 ~ 12

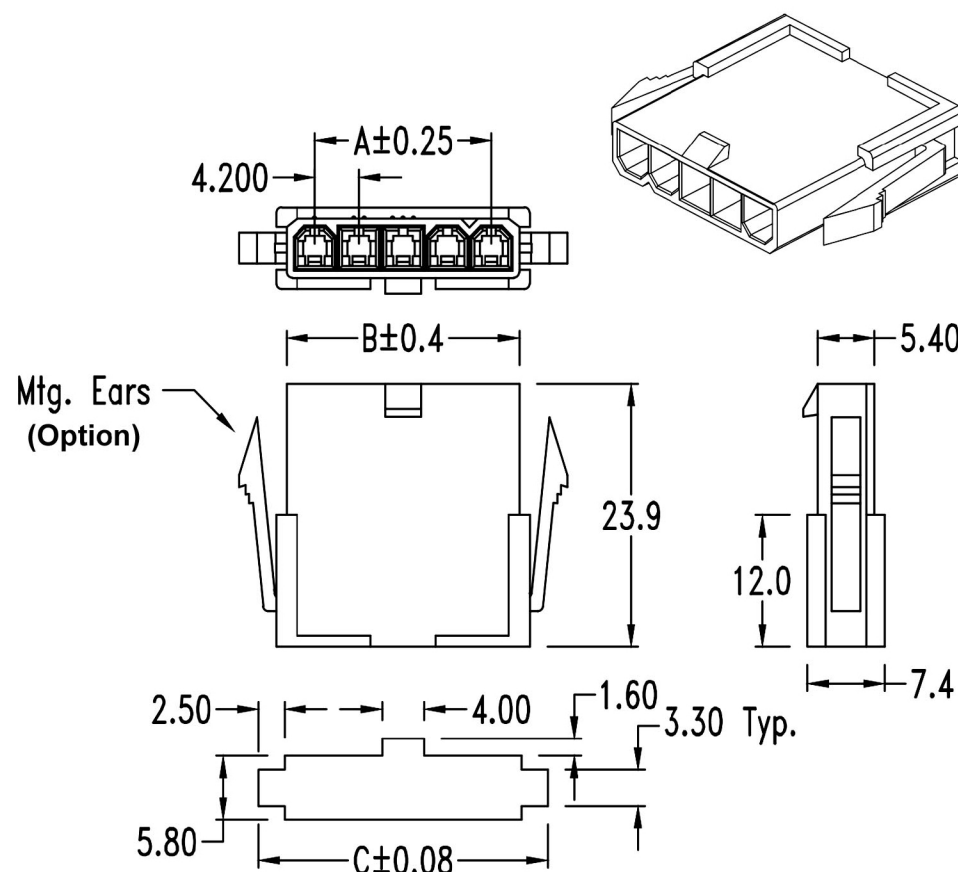


PANEL CUTOUT [Max. panel thickness: .079"(2.0mm)]

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准



TOLERANCE
.000 ± 0.08 (mm)

PART NAME 品名

DWG.
製圖

SCALE
比例 參考

SCALE
比例 參考
.00 ± 0.25 (mm)
.0 ± 0.40 (mm)

4.2mm HOUSING WITH TABS

DATE 制表日
2018/06/01

UNIT
單位 M M
PAGE
張數 1 OF 1

SIZE.
紙張尺寸 A 4
REV.
版次 B

PART NO.
料號 NCHS420-xxMF