
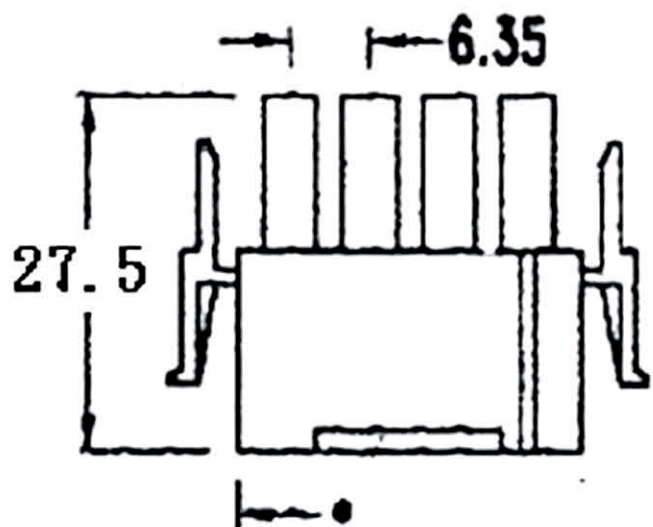


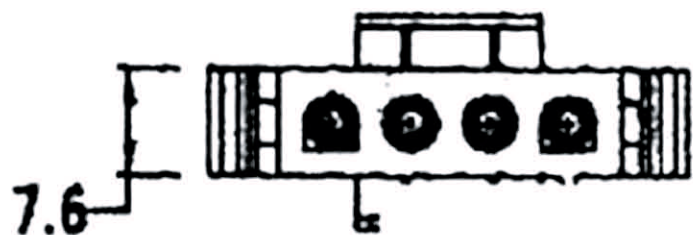

#### Features:

- Integrally molded polarization
- Material: UL 94V-0 or UL 94V-2
- Accepts .25" (6.35mm) crimp type terminals
- Friction lock
- Standard color: Nature
- Recommended panel thickness: .030" ~ .090" (0.762 ~ 2.286mm)


#### Specifications:

- Current rating: 13A
- Voltage rating: 600V
- Insulation resistance: 1000M $\Omega$  min.
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature range: -55°C ~ 105°C

RoHS  
Compliant

Gold Star Connectors Co., Ltd.

APPD.  
核准



TOLERANCE  
容許公差  
.000  $\pm$  0.05  
.00  $\pm$  0.15  
.0  $\pm$  0.40

PART NAME 品名

6.35mm HOUSING MALE

1X4P WHITE ROHS LOW-LEAD

DWG.  
製圖

Jolin

SCALE  
比例 參考

UNIT  
單位 M M

PAGE  
張數 1 OF 1

SIZE  
紙張尺寸 A 4

REV.  
版次 A

PART NO.

NCHT635-xxF

DATE 制表日  
2006/07/27

料號