


1 2 3 4 5 6 7 8

A

A

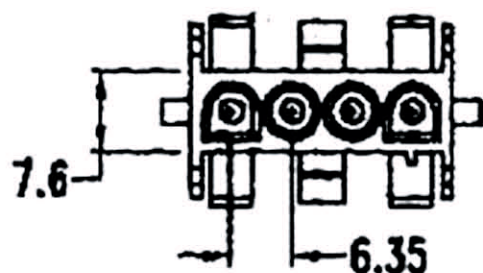


B

B

C

C

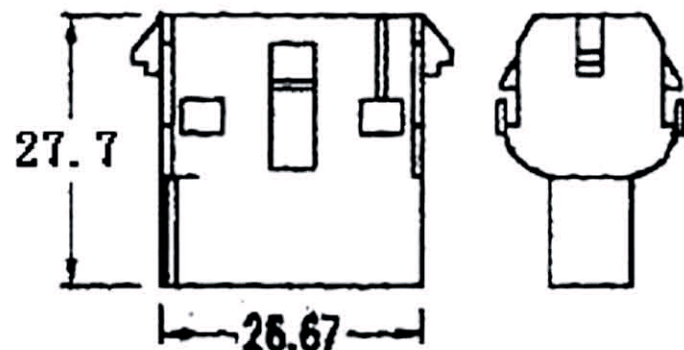

D

D

E

E



F


F

Features:

- Integrally molded polarization
- Material: UL 94V-0 or UL 94V-2
- Accepts .25" (6.35mm) crimp type terminals
- Friction lock
- Standard color: Nature
- Recommended panel thickness: .030" ~ .090" (0.762 ~ 2.286mm)

H

H

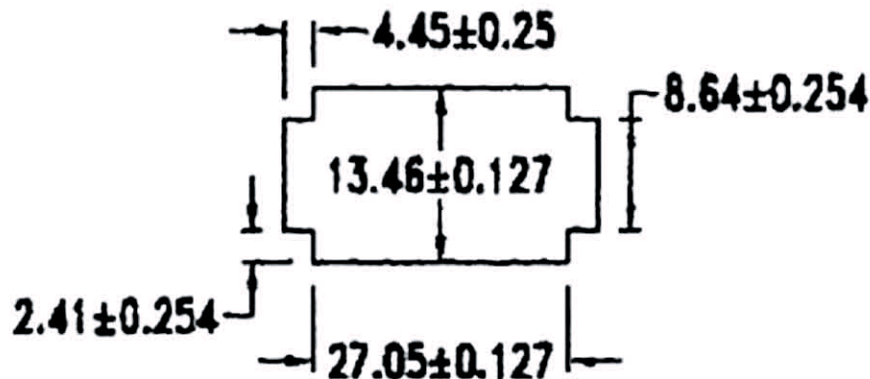

&& Panel must be punched so that housing enters panel in same direction as the punch.


Specifications:

- Current rating: 13A
- Voltage rating: 600V
- Insulation resistance: 1000MΩ min.
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature range: -55°C ~ 105°C

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准



TOLERANCE
容許公差
.000 ± 0.05
.00 ± 0.15
.0 ± 0.40

PART NAME 品名

6.35mm HOUSING FEMALE

1X4P WHITE ROHS LOW-LEAD

DWG.
製圖

Jolin

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

SIZE
紙張尺寸 A 4

REV.
版次 A

PART NO.

料號 NCHT635-xxS

DATE 制表日
2006/07/27

1 2 3 4 5 6 7 8