


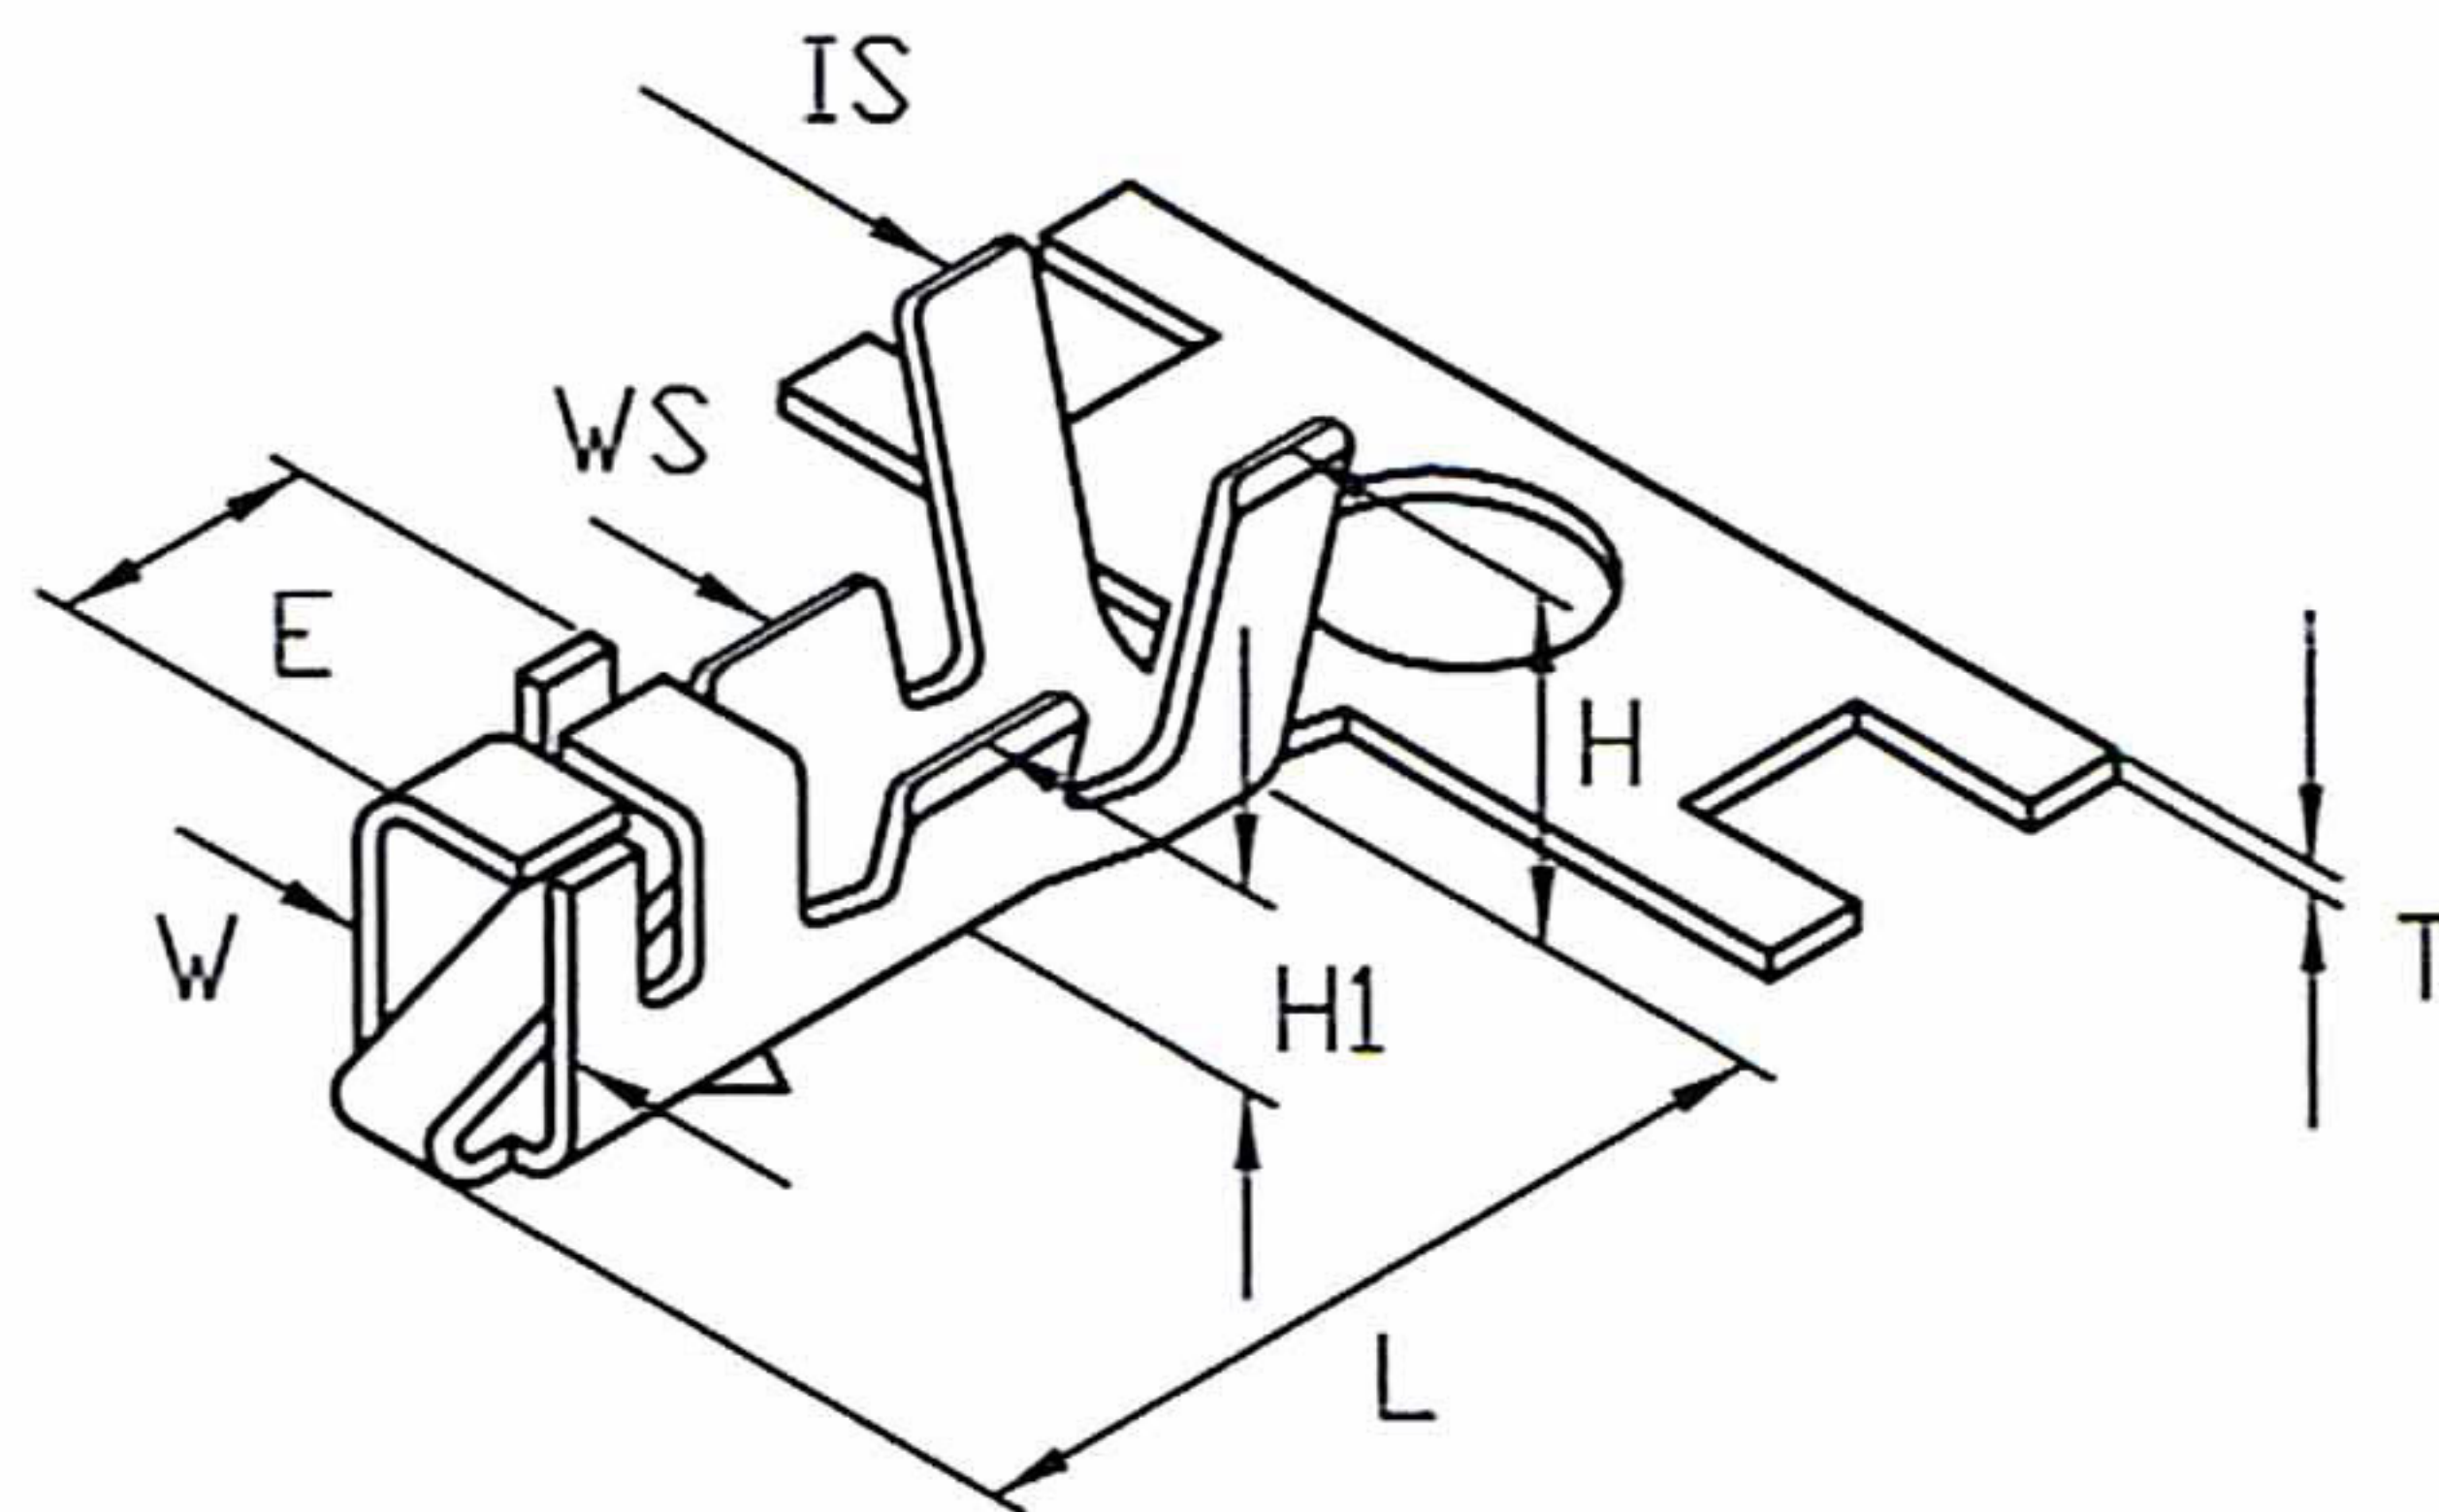


DIMENSION:(MM)

T:0.2±0.03
 L:6.6±0.25
 E:2.0±0.25
 W:1.85^{+0.12}_{-0.1}
 IS:3.0±0.3
 WS:2.0±0.3
 H:3.1±0.25
 H1:1.6±0.25
 H2:2.3±0.15
 t:0.7^{+0.15}_{-0.1}
 e:2.05±0.15

MATERIAL:PHOS

THICKNESS:0.2
 HARDNESS:H
 APPLICABLE WIRE:(AWG)22-28
 PLATING:TIN 40μ' MIN.
 INSULATION O.D.:1.75 MAX.
 MATE:0.25'(0.635MM)SQUARE PIN
 CONTACT RESISTANCE:INITIAL VALUE/10mΩ max.
 AFTER ENVIRONMENTAL TESTING/
 20mΩ max.
 INSULATION RESISTANCE:1.000MΩ min.
 WITHSTANDING VOLTAGE:1.000V AC/minute
 VOLTAGE RATING:AC,DC,250V
 CURRENT RATING:AC,DC,3A
 TEMPERATURE RANGE : -25°C TO +85°C

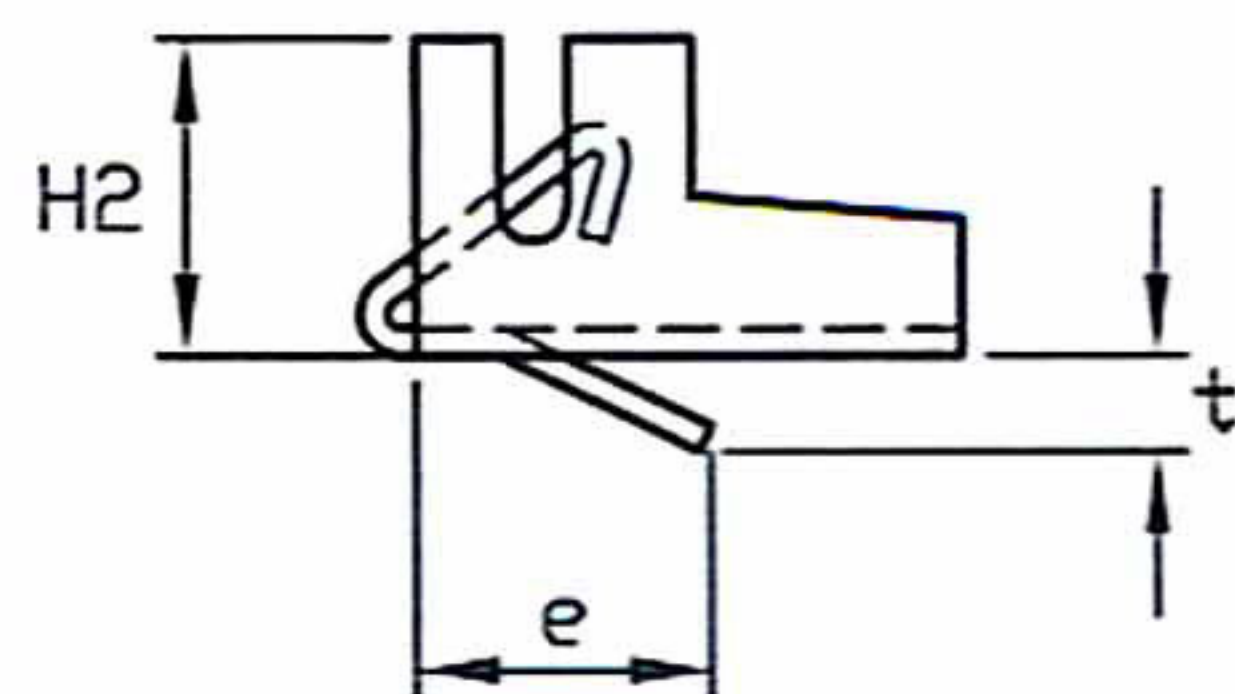

RoHS
Compliant


Gold Star Connectors Co., Ltd.

APPD.
核准

DWG.
製圖

DATE 制表日

2006/08/30



SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
客許公差

.0 ±
.00 ±
ANG. ±

SIZE
紙張尺寸 A 4

REV.
版本 A

PART NAME 品名

2,5mm Crimp Terminal

PART NO.

料號

NCT250-T