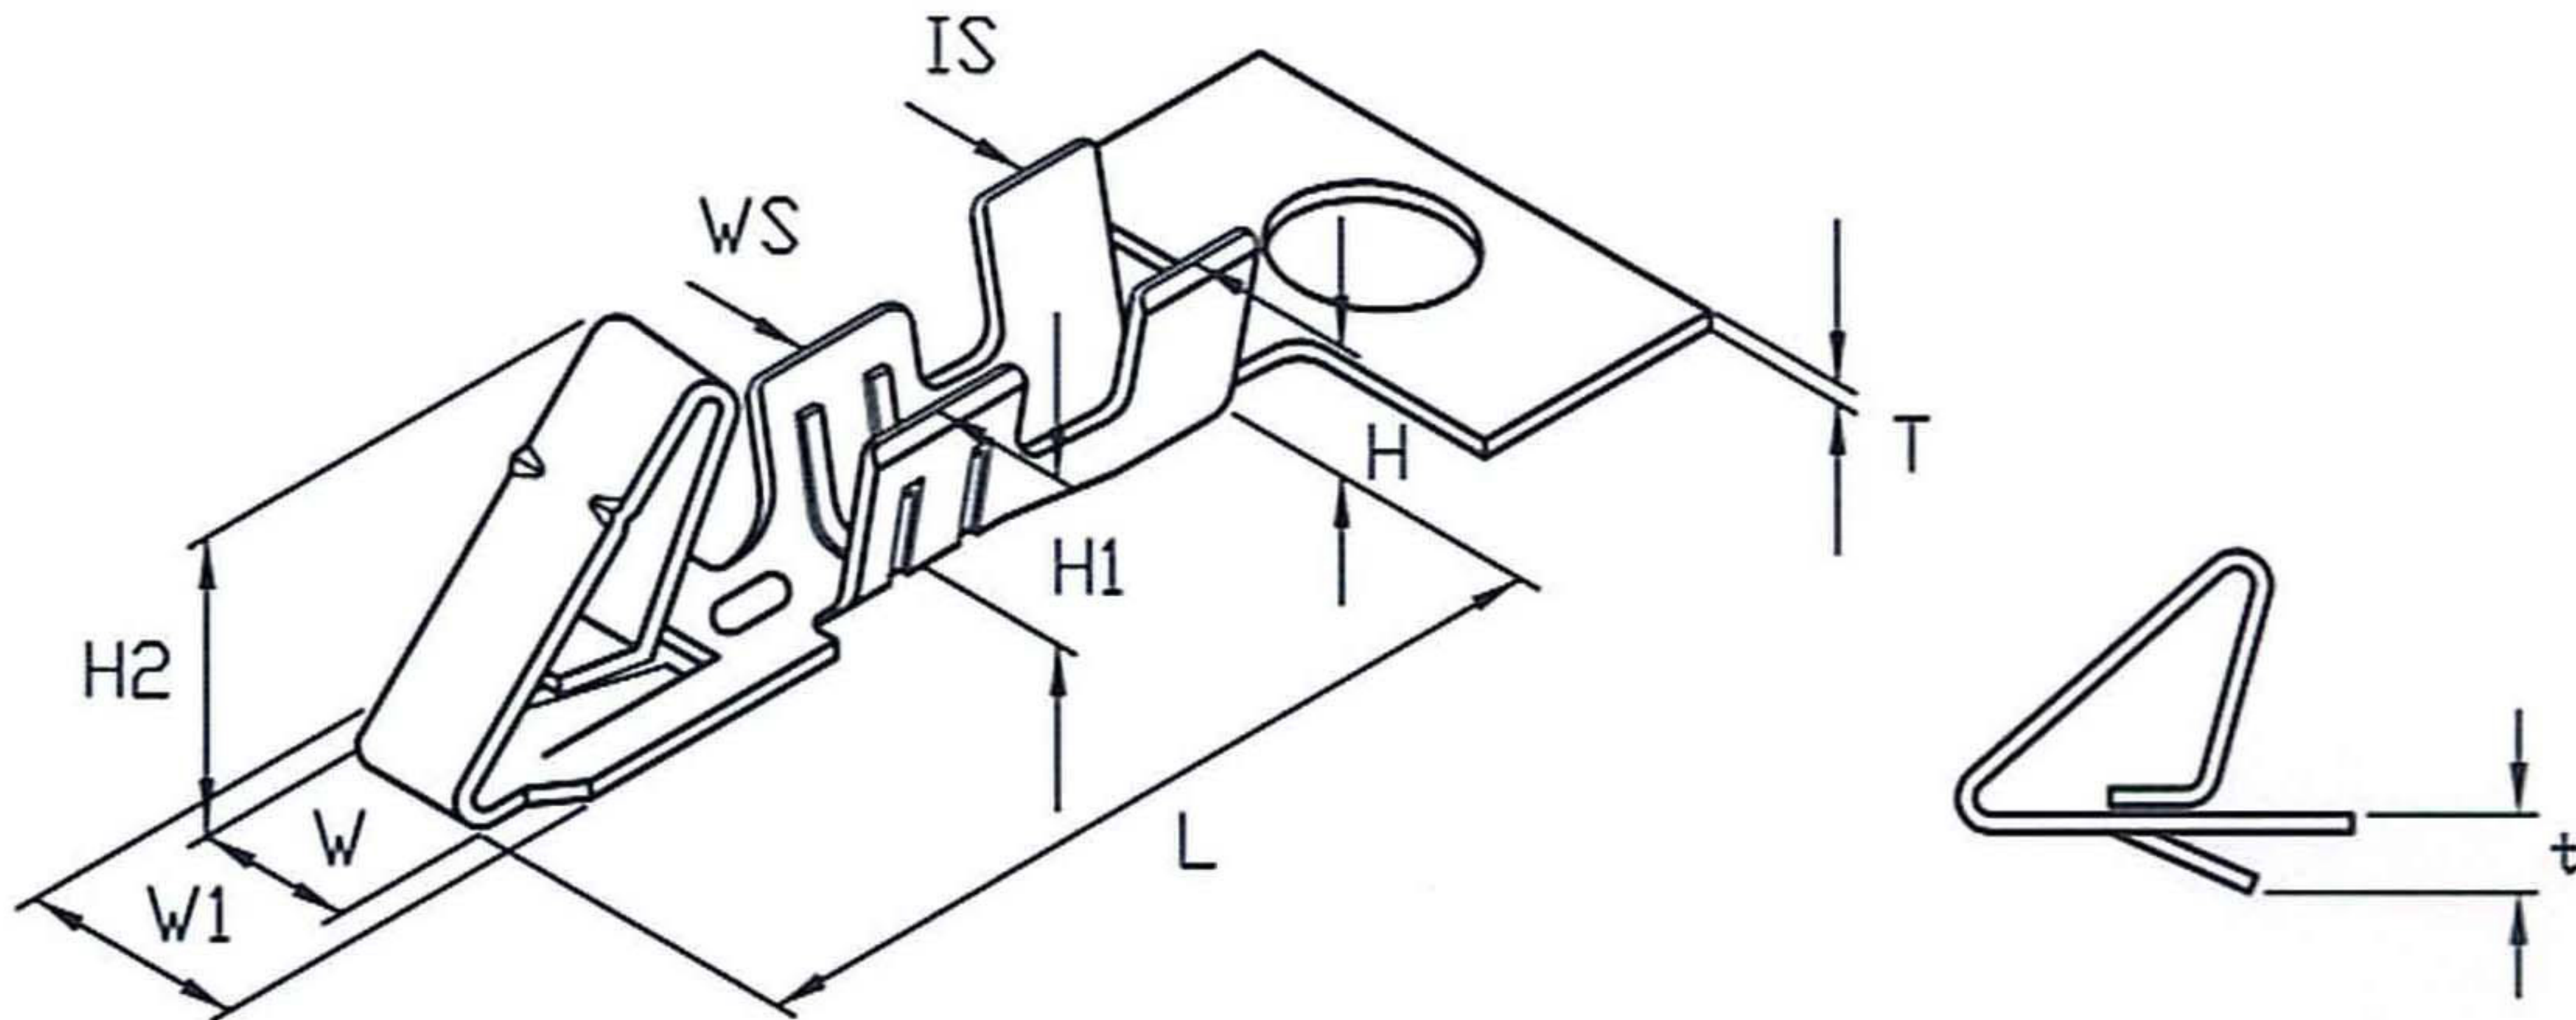


1		2		3		4		5		6		7		8	
A		 MATERIAL:BRASS THICKNESS:0.2 HARDNESS:SH PLATING:SELECTIVE GOLD FLASH INSULATION O.D.:1.57 MAX. WIRE RANGE:(AWG)#24-28 VOLTAGE RATING:AC/250V,DC/350V CURRENT RATING:AC,DC,3A FIRST INSERTION FORCE:0.25KG MAX. PER CIRCUIT SIXTH WITHDRAWAL FORCE:0.06KG MIN. PER CIRCUIT SQUARE OR ROUND PIN SIZE:0.025"(0.63MM) TEMPERATURE RANGE : -25°C TO +85°C T:0.2±0.03 L:9.7±0.25 W:1.3±0.1 W1:1.95±0.1 IS:2.2±0.3 WS:1.9±0.3 H:1.9±0.25 H1:1.6±0.25 H2:3.0±0.5 t:0.9±0.25										A			
B												B			
C												C			
D		PULLING DIRECTION: 										D			
E												E			
F												F			
G												G			
H		RoHS Compliant APPD. 核准 DWG. 製圖 DATE 制表日 Helen 2012/9/6 TOLERANCE 容許公差 SCALE 比例 UNIT 單位 PAGE 張數 參考 參考 參考 參考 MM 1 OF 1 SIZE. 紙張尺寸 REV. 版次 A 4 A PART NAME 品名 2.54mm Brass terminal, selective gold plating, AWG24-28, RoHS PART NO. 料號 NCT254-G-T24										H			
1		2		3		4		5		6		7		8	