

Features:

- Material: Phosphor bronze
- Used in series housing
- Wire range: #20 ~ #30 AWG
- Thickness: 0.2mm

Specifications:


- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A


- Voltage rating: 250V AC(RMS) or DC
- Contact resistance: 10mΩ max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.
(carry rated current load)

Ordering Information



Part No.	Wire size	Dim. a	Dim. b	Dim. c	Dim. d
NCT300-T26F	#26 ~ #30 AWG	1.8	1.6	2.4	1.9
NCT300-T20F	#20 ~ #24 AWG	2.1	2.1	2.7	2.5



SEC. A-A



SEC. B-B

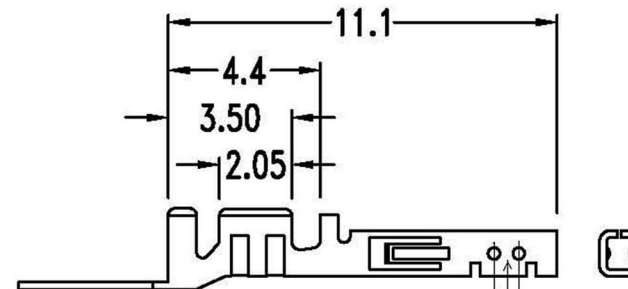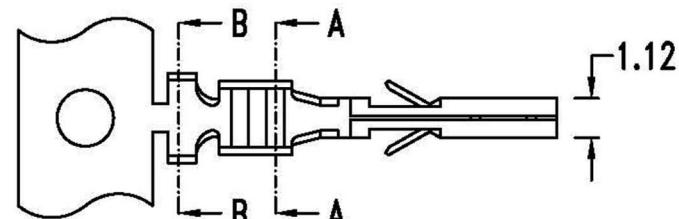

Testing
Stamping then Gold-Plated x-u"

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准



TOLERANCE
容許公差
(mm)
.000 ± 0.05
.00 ± 0.15
.0 ± 0.25

PART NAME 品名

DWG.
製圖

Hedy

SCALE
比例 參考

UNIT
單位 M M

SIZE.
紙張尺寸 A 4

Female Terminal 3.00mm

DATE 制表日

2009/09/10

PAGE
張數 1 / 1

REV.
版次 A

PART NO.

料號 NCT300-TxxF