

1

2

3

4

5

6

7

8

A

B

C





D

E

F

G

H

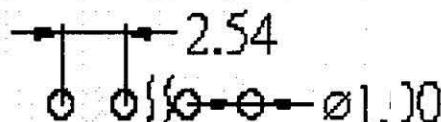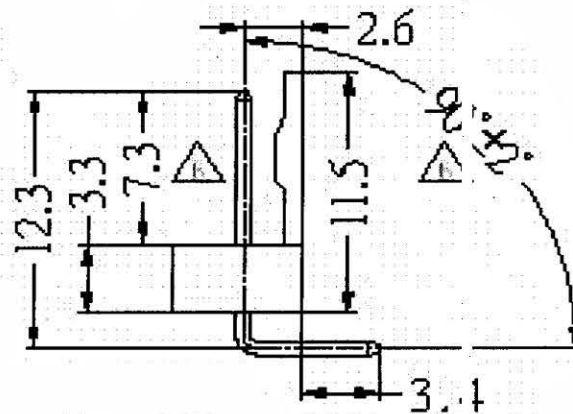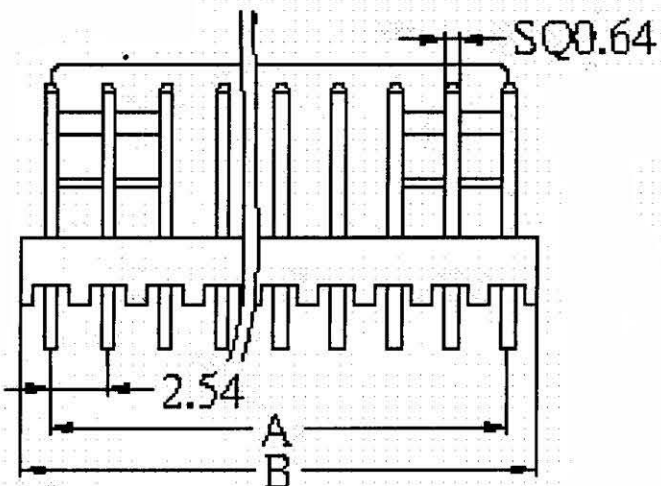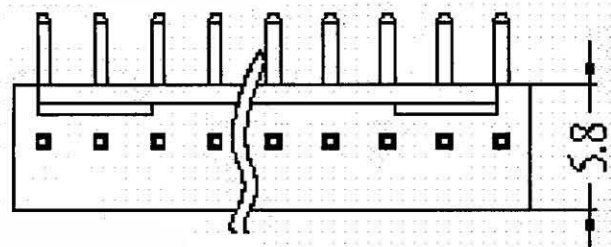

P.C.B. LAYOUT

Available: 2~20pins
 Insulator: Nylon 6/6 UL 94V-2
 Color: Beige
 Conductor: Brass/Tin Plated
 PIN: SQ0.64*17.8mm

CIRCUITS	Dim.A	Dim.B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准

DWG.
製圖

DATE 制表日

2008/11/6

HELEN



SCALE
比例

UNIT
單位

PAGE
張數

TOLERANCE
零許公差

SIZE
紙張尺寸

REV.
版次

1 OF 1

PART NAME 品名

Right angle wafer 2,5mm with
locking ribs

PART NO.

料號 NCW254-xxR