

1 2 3 4 5 6 7 8

A

B

C



D

E

F

G

H

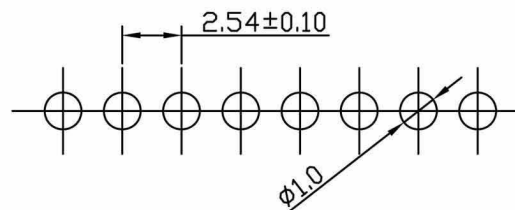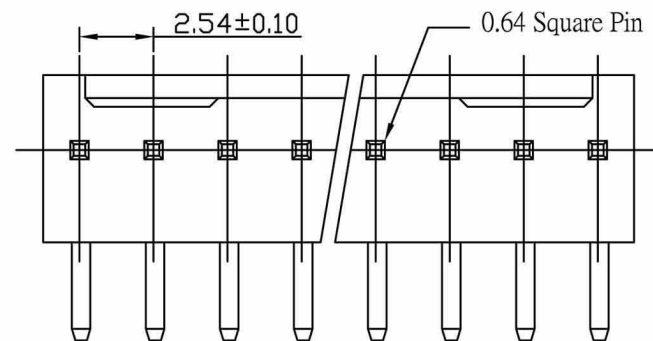

RECOMMENDED P.C. BOARD HOLE DIMM.

FEATURES AND SPECIFICATIONS

Features and Benefits

Size 2 to 20 circuits

Electrical

Current Rating: 2A AC, DC

Voltage Rating: 250V AC/ max.

Insulation Resistance: 1000M Ω / min.

Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: 10m Ω / max.



Operating Temp.: -25°C ~ +85°C

Physical

Material: Nylon 66, UL94V-2

Terminal Material: Brass/ Tin-plated/

Packing: Bag

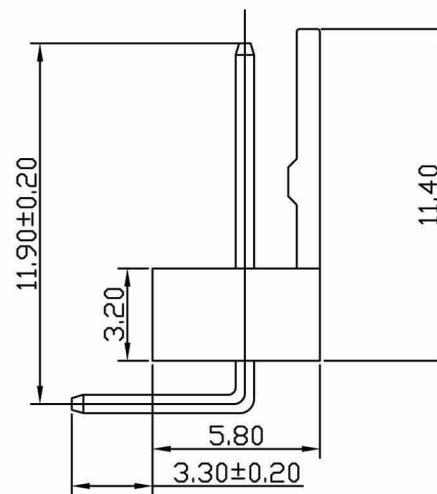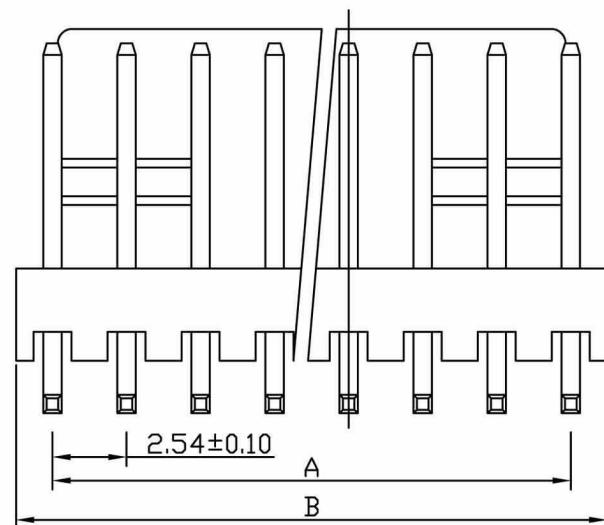

NOTE:

TOLERANCE: 2P~9P ± 0.20

10P~20P ± 0.30

Poles	Dimension mm (in.)	
	A	B
2	2.54(0.100)	5.12(0.202)
3	5.08(0.200)	7.66(0.302)
4	7.62(0.300)	10.20(0.402)
5	10.16(0.400)	12.74(0.502)
6	12.70(0.500)	15.30(0.602)
7	15.24(0.600)	17.94(0.706)
8	17.78(0.700)	20.48(0.806)
9	20.32(0.800)	23.02(0.906)
10	22.86(0.900)	25.58(1.007)
11	25.40(1.000)	28.12(1.107)
12	27.94(1.100)	30.68(1.208)
13	30.48(1.200)	33.10(1.303)
14	33.02(1.300)	35.80(1.409)
15	35.56(1.400)	38.34(1.509)
16	38.10(1.500)	40.94(1.612)
17	40.64(1.600)	43.30(1.705)
18	43.18(1.700)	45.90(1.807)
20	48.26(1.900)	50.80(2.000)

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准

DWG.
製圖

DATE 制表日

2012/1/12

HELEN



SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差

X.XX ± 0.25

X.X ± 0.35

SIZE.
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

Reverse right angle wafer
2.5mm with locking rib

PART NO.

料號 NCW254-xxRR

A

B

C

D

E

F

G

H

1 2 3 4 5 6 7 8