
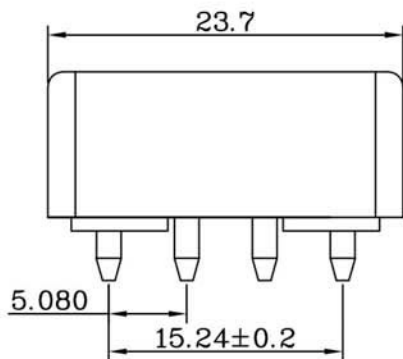
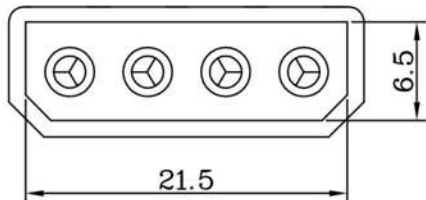


### Features:

- \* Material: Nylon 66 UL94-V2
- \* Two P.C tall lengths
- \* Pin Material: Brass/Tin-Plated

### Specification:

- \* Pitch between poles 5.08mm
- \* Rated Voltage 250V AC,DC
- \* Rated Current 5A AC,DC
- \* Withstand voltage 1500V AC/minute
- \* Insulation Resistance 1000M Ohms/min
- \* Temperature Range -25°C~+105°C



P.C.B Thickness 1.6~2.0mm

P.C.B Hole dia.  $\phi 1.8 \pm 0.05$ mm

P.C.B LAYOUT

|                                           |                                      |                                                                                                                                                   |                                                                                                   |
|-------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| <div>RoHS Compliant</div>                 |                                      | <div>Gold Star Connectors Co., Ltd.</div>                                                                                                         |                                                                                                   |
| <div>APPRO. 核准</div> <div>HELEN</div>     | <div>SCALE 比例</div> <div>参考</div>    | <div>TOLERANCE 容许公差</div> <div>.000 : <math>\pm 0.08</math></div> <div>.001 : <math>\pm 0.13</math></div> <div>.010 : <math>\pm 0.25</math></div> | <div>PART NAME 品名</div> <div>5.08MM POWER PLUG 4P STRAIGHT</div> <div>TIN PLATED WHITE ROHS</div> |
| <div>DWG. 製圖</div> <div>ABBY</div>        | <div>UNIT 單位</div> <div>MM</div>     | <div>SIZE 规格尺寸</div> <div>A4</div>                                                                                                                | <div>PART NO.</div> <div>NCW508-04SB</div>                                                        |
| <div>DATE 制表日</div> <div>2013/11/12</div> | <div>PAGE 原数</div> <div>1 OF 1</div> | <div>REV. 版本</div> <div>A</div>                                                                                                                   | <div>料號</div> <div>NCW508-04SB</div>                                                              |