

Features:

- Available in 2 thru 24 circuits
- Material: UL 94V-0 + 30% GF
- .025"(0.64mm) square pins
- Tin-plated brass pin
- Standard color: Black

Specifications:





- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V
- Contact resistance: 10mΩ Max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.
(carry rated current load)

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		6.65	14	18.0	24.65
4	3.0	9.65	16	21.0	27.65
6	6.0	12.65	18	24.0	30.65
8	9.0	15.65	20	27.0	33.65
10	12.0	18.65	22	30.0	36.65
12	15.0	21.65	24	33.0	39.65

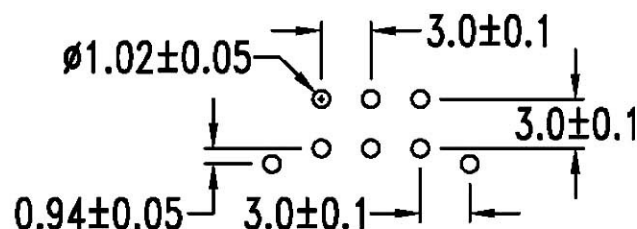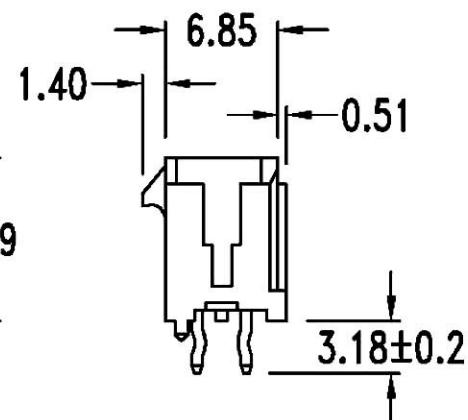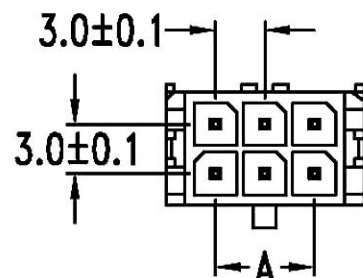

PCB Layout: Component side

Recommended PCB thickness:.062"(1.57mm)

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准 Betty

DWG.
製圖 Jolin

DATE 制表日
2006/06/30

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差
.000 ± 0.05
.00 ± 0.15
.0 ± 0.25

SIZE
紙張尺寸 A 4

REV.
版次 B

PART NAME 品名

WAFER DUAL ROW 3.00 180°

PART NO.

料號 NCWD300-xxS