

Features:

- 2 ~ 12 circuits available
- Material: Nylon UL 94V0
- .025"(0.64mm) square pins
- Tin-plated brass pin
- Standard color: Black

Specifications:


- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V
- Contact resistance: 10mΩ Max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.
(carry rated current load)

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	3.0	9.0	4	9.0	15.0	6	15.0	21.0	8	21.0	27.0	10	27.0	33.0	12	33.0	39.0
3	6.0	12.0	5	12.0	18.0	7	18.0	24.0	9	24.0	30.0	11	30.0	36.0			

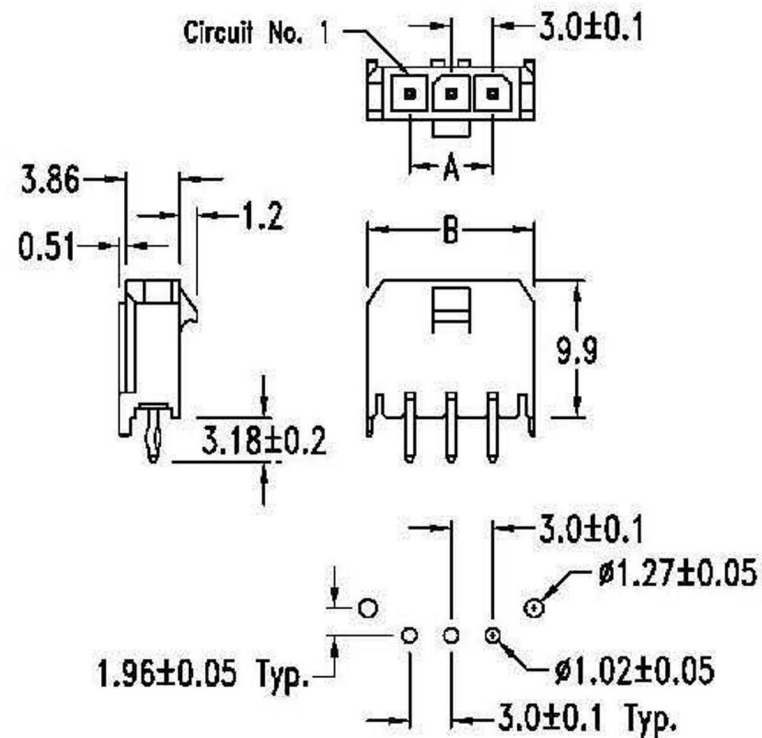

PCB Layout: Component side
Recommended PCB thickness:.062"(1.57mm)

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准 Hedy

DWG.
製圖 Yumi


DATE 制表日
2009/09/16



SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1



UNLESS OTHERWISE
SPECIFIED TOLERANCE:
.000 ± 0.05 (mm)
.00 ± 0.15 (mm)
.0 ± 0.25 (mm)

SIZE.
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

WAFER SINGLE ROW 180°

PART NO.

料號

NCWS300-xxS