

■ Features

- High Luminous LEDs
- 3mm Round Standard Directivity
- Candle Flashing Type
- Water Clear


■ Applications

- Toys
- Games
- Audio
- Other Lighting


■ Absolute Maximum Rating (Ta=25°C)

Item	Symbol	Value	Unit
Power Supply	Voltage	5.0	V
Operating Temperature	Topr	-30 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Lead Soldering Temperature	Tsol	260°C/5sec	-

■ Outline Dimension

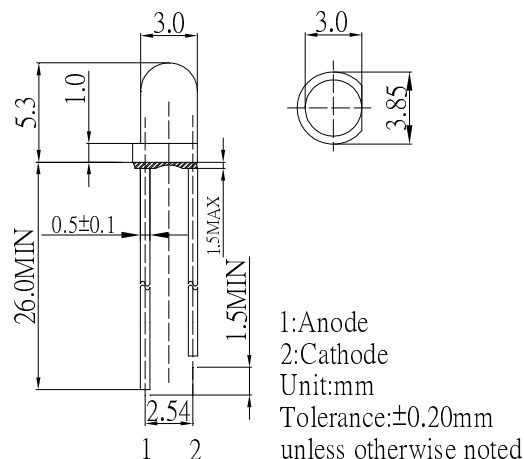

■ Directivity

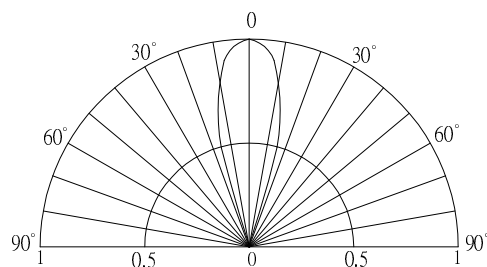

■ Electrical -Optical Characteristics (Ta=25°C)

Part Number	Color			V _F (V)			I _v (mcd)*			CCT(K)/λD(nm)*			2θ _{1/2} (deg)
				Min.	Typ.	Max.	Typ.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				I _F =20mA			I _F =20mA			I _F =20mA			
OS5WDK3131A	White	W		2.5	3.3	5.0	5800	7000	-	8500-18000K(X:0.27,Y:0.28)			30
OS5MDK3131A	Warm White	M		2.5	3.3	5.0	4200	5800	-	2700-3300K(X:0.45,Y:0.41)			30
OS2MDK3131A	Warm White	M		2.5	3.3	5.0	4200	5800	-	2000-2400K(X:0.51,Y:0.41)			30
OSB5SK3131A	Blue	B		2.5	3.3	5.0	1560	2500	-	465	470	475	30
OSG5DK3131A	Pure Green	PG		2.5	3.3	5.0	12000	14000	-	520	525	530	30
OSY5MK3131A	Yellow	Y		2.5	3.3	5.0	4200	5800	-	585	590	595	30
OSR5MK3131A	Red	R		2.5	3.3	5.0	4200	5800	-	620	625	630	30

*1 Tolerance of measurements of Chromaticity coordinates is ±10%

*2 Tolerance of measurements of Dominant wavelength is ±1nm

*3 Tolerance of measurements of Luminous intensity is ±15%

*4 Tolerance of measurements of Forward voltage is ±0.1V

*5 Tolerance of measurements of Frequency is ±20%