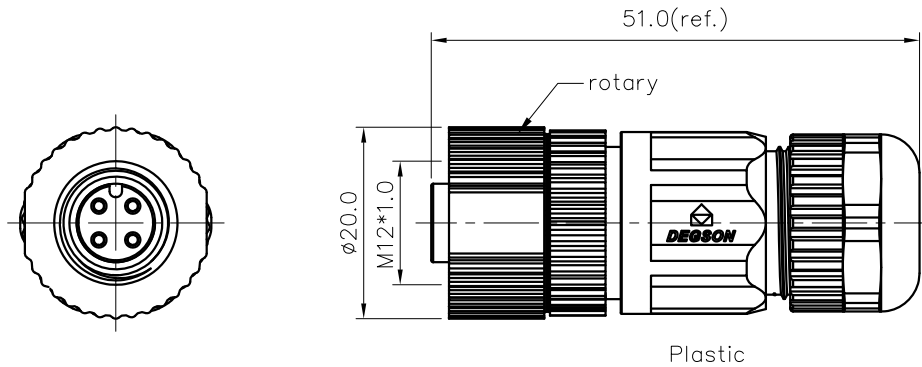


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



PA-M12X-XXP-FF-SL7001-00A(H)

Coding: A,B,D

Pin number: 03,04,05,
06,08,10,12

NOTES:

- Rated voltage/current : 3pin A: 250V / 4A
4pin A: 250V / 4A
5pin A: 60V / 4A
6pin A: 30V / 2A
8pin A: 30V / 2A
10pin A: 30V / 1.5A
12pin A: 30V / 1.5A
5pin B: 60V / 4A
4pin D: 250V / 4A
- Withstanding voltage : 3,4pin A: AC1500V/1Min
5pin A: AC1120V/1Min
6,8,10,12pin A: AC500V/1Min
5pin B: AC1120V/1Min
4pin D: AC1500V/1Min

3.Levels of protection:IP67

4.Wire range :










- 3pin A: 24~20AWG/0.25~0.52mm²
- 4pin A: 24~20AWG/0.25~0.52mm²
- 5pin A: 24~20AWG/0.25~0.52mm²
- 6pin A: 24~22AWG/0.25~0.34mm²
- 8pin A: 24~22AWG/0.25~0.34mm²
- 10pin A: 26~22AWG/0.14~0.34mm²
- 12pin A: 26~22AWG/0.14~0.34mm²
- 5pin B: 24~20AWG/0.25~0.52mm²
- 4pin D: 24~20AWG/0.25~0.52mm²

5.Cable OD: 4~8mm

6.Wire connection mode:soldering

7.Operating temperature: -25°C~+105°C

8.RoHS Compliance

10pin A Coding	12pin A Coding	5pin B Coding	4pin D Coding	
				
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	
3pin A Coding	4pin A Coding	5pin A Coding	6pin A Coding	8pin A Coding
				
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View

DETACHED LISTS	PART NO.: PAM12XXXPFSL700100AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: PA-M12X-XXP-FF-SL7001-00A(H)		
	CHKD:			
	DRFT: LZ 2018.10.08	TITLE: CUSTOMER DRAWING	REV	D0-1
	 THIRD ANGLE PROJECTION	DRAWING NO.: XXXXXXXX-XX-CXX	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1