
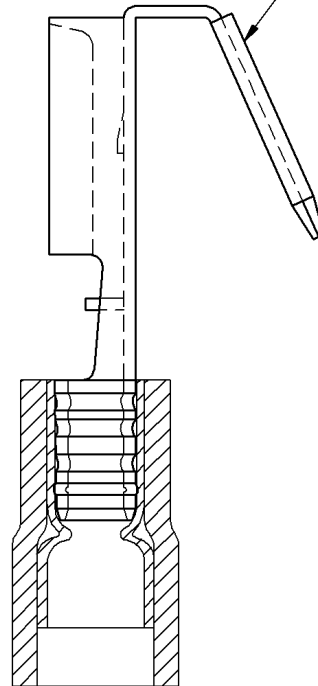
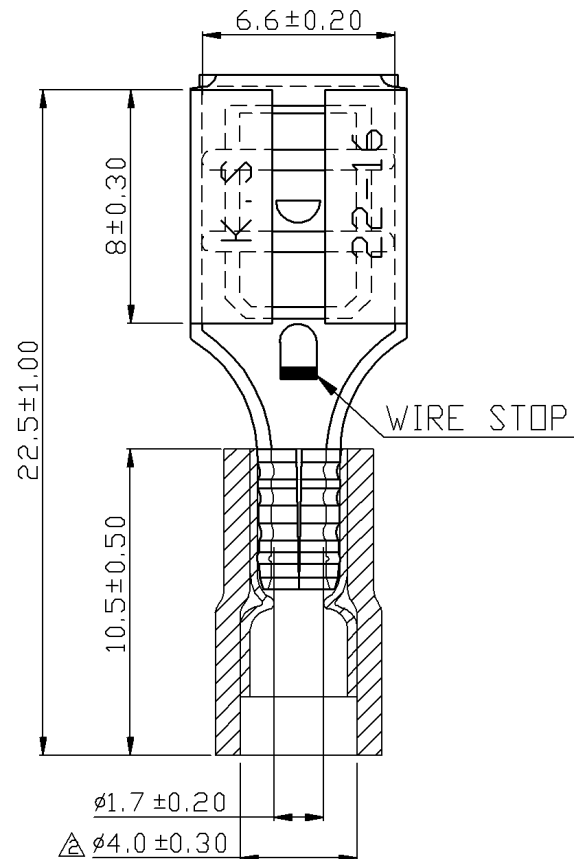
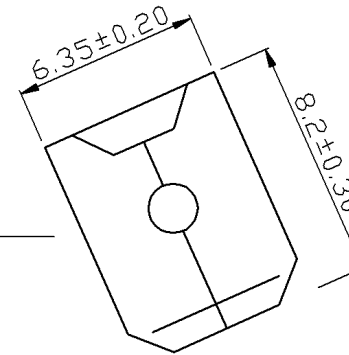


A B C D E F G H

REV	DESCRIPTION	DATE
△ RDK-96131		張馨尹 2008/01/09
△ RDK-98053		洗勝賢 2009/03/17



- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	3	4	7	10
 2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
 3. INSULATION MATERIAL : VINYL
 4. INSULATION COLOR : RED
 5. TERMINAL MATERIAL : BRASS
 6. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
 7. NEMA TAB : 0.032 inch * 0.250 inch (0.8 mm * 6.35 mm)
 8. DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
 9. TERMINAL SURFACE TREATMENT : TIN PLATED
 10. TERMINAL THICKNESS : 0.40 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° > ° REF ±
18 > 30 mm ± 0.40	° > ° ±
30 > 75 mm ± 0.50	° > ° ±

NAME	VINYL-INSULATED DOUBLE CRIMP PIGGY BACK DISCONNECTORS				UNIT	mm
PART NO.	PBDD1-250	MATERIAL	-----	APPROVE	張馨尹	
NUMBER	KA-951386-C	SCALE	SHEET	PAGE	CHECKED	楊駿孝
DATE	2006/09/11	4/1	1-2	10F2	DRAWN	張馨尹

KST. K.S. TERMINALS INC.

A B C D E F G H